

ø22 HW Series Control Units

Complete with finger-safe contact blocks Ensure safety and save wiring time


- Locking lever removable contact blocks
- Spring-up screw and finger-safe (IP20) contact blocks are available.
- Self-cleaning rolling action contacts have a raked contact surface.
- Degree of protection: IP65 (except dual pushbutton: IP40)
- Dual pushbutton switches available with two pushbuttons and a pilot light integrated into one space-saving control unit.
- A wide range of operating voltages for worldwide application
- UL, CSA rated, and EN compliant.

Application for dual pushbuttons:

Ideal for use as power switches and start/stop switches (available with I/ON and O/OFF markings on the buttons and a pilot light in the center).

Interlock type prevents two pushbuttons from being pressed at the same time, providing the best solution for up/down switches.

Applicable Standards	Mark	File No. or Organization
UL508		UL Listing File No. E68961
CSA C22.2 No.14		CSA File No. LR92374
EN60947-5-1		TÜV Rheinland
		EU Low Voltage Directive
GB14048.5		CCC No. 2005010305145656 No. 2011010304454933 (pilot light)

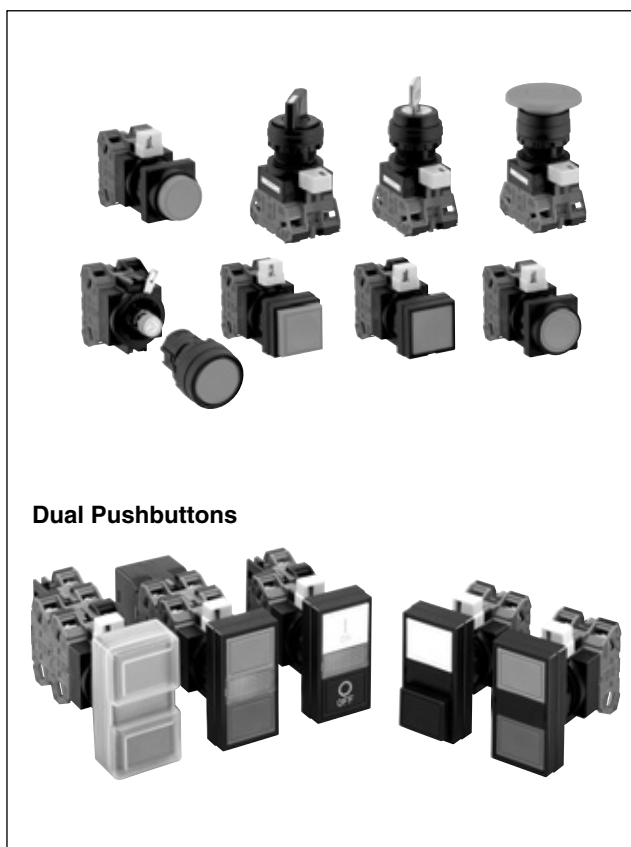

Dual Pushbuttons

Specifications and Ratings

Contact Ratings

Pushbuttons Illuminated Pushbuttons Dual Pushbuttons Selector Switches Illuminated Selector Switches Pushbutton Selectors	Contact Block	HW-G / HW-F
	Rated Insulation Voltage	600V
	Rated Thermal Current	10A
	Contact Ratings by Utilization Category IEC 60947-5-1	AC-15 (A600) DC-13 (P600)

Characteristics

Contact Ratings by Utilization Category

Operating Voltage			24V	48V	50V	110V	220V	440V
Operational Current	AC 50/60 Hz	AC-12 Control of resistive loads and solid state loads	10A	—	10A	10A	6A	2A
		AC-15 Control of electromagnetic loads (> 72 VA)	10A	—	7A	5A	3A	1A
	DC	DC-12 Control of resistive loads and solid state loads	8A	4A	—	2.2A	1.1A	—
		DC-13 Control of electromagnets	4A	2A	—	1.1A	0.6A	—

Note: The operational current represents the classification by making and breaking currents (IEC 60947-5-1).


• Minimum applicable load: 3V AC/DC, 5 mA (applicable range may vary with operating conditions and load types)

For the control units listed below, the rated current (load switching current) is reduced to a half of the rated operational current of the contact block. The rated insulation voltage (600V) and the rated thermal current (10A) remain unchanged.


- 3-position selector switches which contain J or S following 3 in the Part No. and which have cam code J or S. Example: HW1S-3JT21N1
- All 4-position and 5-position selector switches
- All mono-lever switches
- All pushbutton selectors (circuit symbols E, F, N)

Contact Blocks

HW-G (Spring-up Screw Terminal)

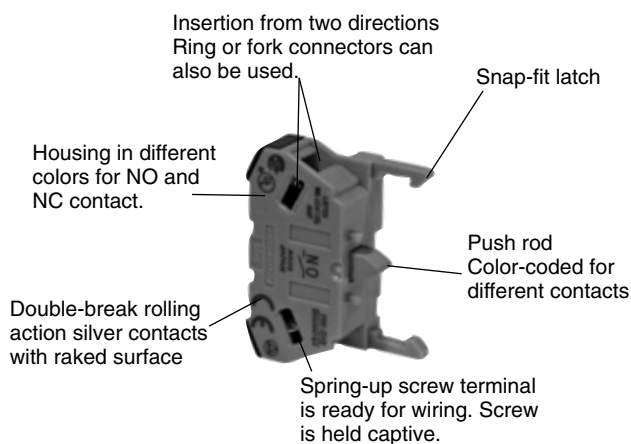

HW-F (IP20 Finger-Safe Screw Terminal)

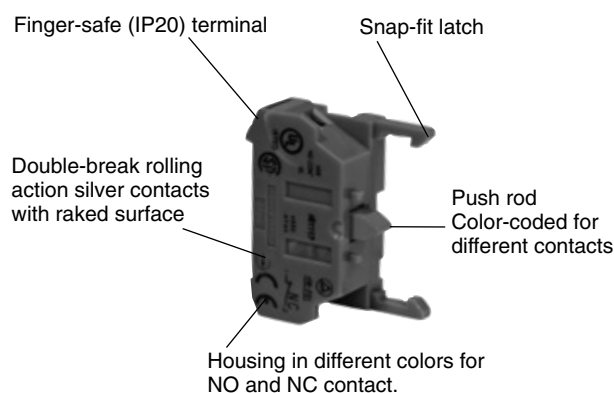

Note: HW-G and HW-F contact blocks have different dimensions. For dimensions, see page 259.

Contact Blocks

Part No.	HW-G10 HW-F10	HW-G01 HW-F01	HW-G10R HW-F10R	HW-G01R HW-F01R
Contact	NO	NC	NO (early make)	NC (late break)
Housing	Blue	Purple red	Blue	Purple red
Push Rod	Green	Red	Black	White

- Up to 2 layers (4 blocks) can be attached.

LED Illuminated Unit Specifications

Unit	Color Code ②	Input Type	Operating Voltage	LED Lamp		
				Lamp Base	Part No.	Voltage
Pilot Light Illuminated Pushbutton Illuminated Selector Switch	A: amber G: green PW: pure white R: red S: blue W: white Y: yellow	Full Voltage	6V AC/DC	BA9S/13	LSTD-6②	6V AC/DC±10%
			12V AC/DC		LSTD-1②	12V AC/DC±10%
			24V AC/DC		LSTD-2②	24V AC/DC±10%
		Transformer	100/110V AC 115/120V AC 200/220V AC 230/240V AC 380V AC 400/440V AC 480V AC (50/60 Hz)		LSTD-6②	6V AC/DC±10%
		DC-DC Converter	110V DC		LSTD-6②	6V AC/DC±10%

- Use a pure white LED for yellow illumination.
- Yellow cannot be used with dual pushbuttons.

Incandescent Illuminated Unit Specifications

Unit	Color Code ②	Input Type	Operating Voltage	LED Lamp		
				Lamp Base	Part No.	Voltage
Pilot Light Illuminated Pushbutton Illuminated Selector Switch	A: amber G: green R: red S: blue W: white	Full Voltage	6V AC/DC	BA9S/13	LS-6	1W (6.3V)
			12V AC/DC		LS-8	1W (18V)
			24V AC/DC		LS-3	1W (30V)
		Transformer	100/110V AC 115/120V AC 200/220V AC 230/240V AC 380V AC 400/440V AC 480V AC (50/60 Hz)		LS-6	1W (6.3V)

- For LED and incandescent unit specifications of jumbo dome pilot lights, see page 218.

Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets


Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces

Sensors

Control
StationsExplosion
Protection

References



LED Lamp Ratings (LSTD) (Except Jumbo Dome Pilot Lights)

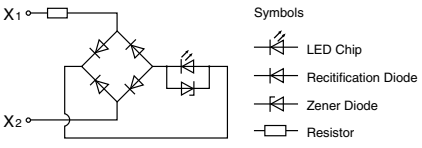Part No.	LSTD-6②	LSTD-1②	LSTD-2②
Lamp Base	BA9S/13		
Rated Voltage	6V AC/DC	12V AC/DC	24V AC/DC
Voltage Range	6V AC/DC ±10%	12V AC/DC ±10%	24V AC/DC ±10%
Current Draw	AC	8 mA	11 mA
	DC	A, R, W: 7 mA G, PW, S: 5.5 mA	10 mA
Color Code	A (amber), G (green), PW (pure white), R (red), S (blue), W (white)		
Lamp Base Color	Same as illumination color		
Voltage Marking	Die stamped on the base		
Life (reference value)	Approx. 50,000 hours (until the brightness reduces to 50% the initial value when lit at complete direct current of the rated voltage under 25°C environment.)		
Internal Circuit			

Incandescent Lamp Ratings (LS) (Except Jumbo Dome Pilot Lights)

Part No.	LS-6	LS-8	LS-2	LS-3
Lamp Base	BA9S/13			
Rated Voltage	6V AC/DC	12V AC/DC	18V AC/DC	24V AC/DC
Wattage	1W (6.3V)	1W (18V)	1W (24V)	1W (30V)
Voltage Marking	Die stamped on the base			
Life (reference value)	Approx. 1,000 hours minimum (mean value when used on the rated voltage)			

LED Lamp Ratings (LSTDB) (For Jumbo Dome Pilot Lights Only)

Part No.	LSTDB-2②
Rated Voltage	24V AC/DC
Voltage Range	24V AC/DC ±10%
Current Draw	15 mA
Color Code	A (amber), G (green), PW (pure white), R (red), S (blue), W (white)
Life (reference value)	Approx. 20,000 hours (until the brightness reduces to 50% the initial value when lit at complete direct current of the rated voltage under 25°C environment.)
Internal Circuit	A, R, W  G, PW, S  LED Chip Rectification Diode Zener Diode Resistor

• Use a pure white LED for yellow illumination.

Incandescent Lamp Ratings (LSB) (For Jumbo Dome Pilot Lights Only)

Part No.	LSB-2
Rated Voltage	24V AC/DC
Wattage	3.6W
Lamp Rating	28V, 0.17A
Life (reference value)	Approx. 1,000 hours (Mean value at the rated voltage.)

• Use incandescent lamp types for displaying the muting status (temporary automatic suspension of a safety function, required by IEC61496-1) of equipment such as light curtains.

Specifications

Operating Temperature	-25 to +60°C (no freezing) Illuminated units: -25 to +50°C Jumbo dome pilot lights: -25 to +55°C	
Storage Temperature	-40 to +80°C	
Operating Humidity	45 to 85% RH (no condensation)	
Contact Resistance	50 mΩ maximum (initial value)	
Insulation Resistance	100 MΩ minimum (500V DC megger)	
Dielectric Strength (Note)	Between live and dead metal parts: 2,500V AC, 1 minute (Full voltage illuminated units: 2,000V AC, 1 minute)	
Vibration Resistance	Damage limits, Operating extremes: 5 to 55 Hz, amplitude 0.5 mm	
Shock Resistance	Damage limits: 1,000 m/s ² Operating extremes: 100 m/s ²	
Mechanical Life (minimum operations)	Pushbuttons, Illuminated pushbuttons Momentary: 5,000,000 Maintained: 500,000 Dual pushbuttons: 500,000 Selector switches: 500,000	Key selector switches Disc tumbler: 500,000 Pin tumbler: 100,000 Illuminated selector switches: 500,000 Pushbutton selectors: 250,000 Mono-lever switches: 250,000
Electrical Life (minimum operations)	Pushbuttons, Illuminated pushbuttons: 500,000 *1 Dual pushbuttons: 500,000 *1 Selector switches: 500,000 *2 Key selector switches Disc tumbler: 500,000 *2 Pin tumbler: 100,000 *2 *1 Switching frequency 1,800 operations/h, duty ratio 40% *2 Switching frequency 1,200 operations/h, duty ratio 40% *3 Switching frequency 900 operations/h, duty ratio 40%	Illuminated selector switches: 500,000 *2 Pushbutton selectors: 250,000 *2 Mono-lever switches: 250,000 *3
Weight	66g (HW1B-M122), 20g (HW1P-1Q4), 84g (HW1L-M122Q4), 66g (HW1S-2T22), 94g (HW1K-2A22), 72g (HW1K-2JPC11), 84g (HW1F-222Q4), 71g (HW1R-2A22), 82g (HW1M-2222-22N9), 72g (HW7D-B111111), 90g (HW7D-L111111Q4)	

Note: Dielectric strength for dual pushbuttons are as follows:

Without pilot light: 2,500V AC, 1 minute (between live and dead metal parts)

With pilot light:

Full voltage type: 1,000V AC, 1 minute (between live and dead metal parts)


Transformer and DC-DC converter types: 2,000V AC, 1 minute (between live and dead metal parts)

Degree of Protection

Unit	NEMA ICS 6-110	IEC 60529
All units except dual pushbutton switches	Type 1, 2, 3, 3R, (3S), 4, 5, 12, 13	IP65 (Note 1)
Dual pushbutton switches		IP40 (Note 2)

Note 1: When using a nameplate with the control unit, IP65 protection degree is achieved only when nameplates shown on page 256 are used.
 Note 2: IP65 protection degree when HW9Z-D7D button cover is used.

Mounting Hole Layout

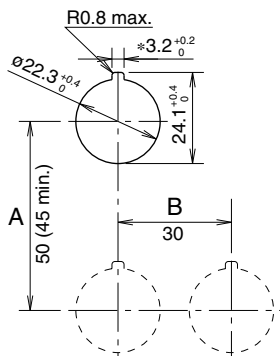

* The 3.2 mm recess is for preventing rotation and is not necessary when the nameplate or anti-rotation ring is not used.

The minimum mounting centers are applicable to switches with one layer of contact blocks (two contact blocks). When two layers of contact blocks are mounted, determine the minimum mounting centers in consideration of convenience for wiring.

Minimum Mounting Centers

Unit	A	B
ø40mm mushroom button	50 mm	40 mm
Pilot light	30 mm	30 mm
Pushbutton selector	50 mm	50 mm
Mono-lever switch	72 mm	72 mm
Jumbo dome pilot	85 mm	85 mm
Dual pushbutton switches	55 mm	30 mm
Illuminated selector switches	50 mm	50 mm


Note: When using the safety lever lock, determine the vertical spacing (A) in consideration of convenience for installing and removing the safety lever lock.
 Recommended vertical spacing: 100 mm

Ordering Information

The Part No. development charts shown below can be used to specify control units other than those listed on the following pages. Gold-plated silver contacts are also available.


Pushbuttons

HW1B-M1 F 11 R -MAU

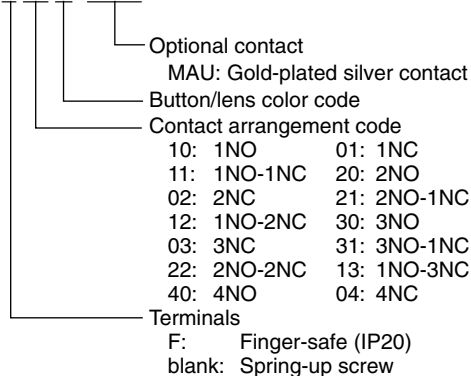


Pilot Lights

HW1P-1 F H 2 R

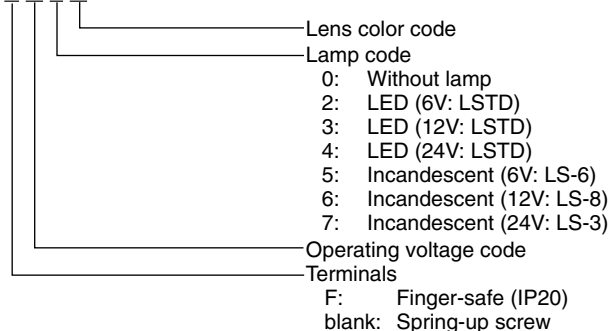

Illuminated Pushbuttons

HW1L-M1 F 11 H 2 R -MAU

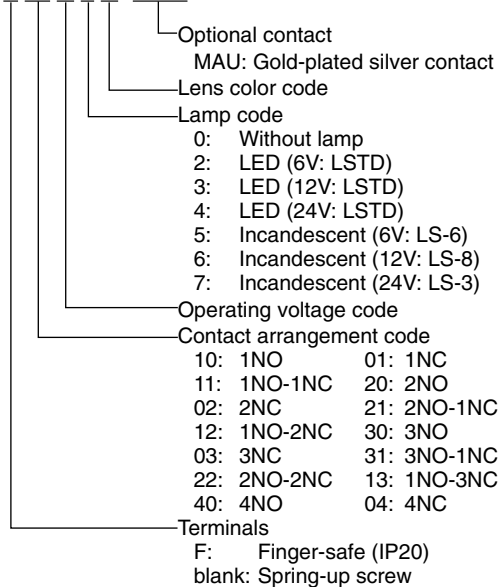

Note: Transformer and DC-DC converter types can have two or four contact blocks only.

Flush
Silhouette

Switches &
Pilot Lights

Display
Lights

LED
Illumination
Units

Display
Units

Safety
Products

Terminal
Blocks

Comm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
Protectors

Power
Supplies

PLCs &
SmartRelay

Operator
Interfaces


Sensors

Control
Stations


Explosion
Protection

References






Dual Pushbutton Switches without Pilot Light

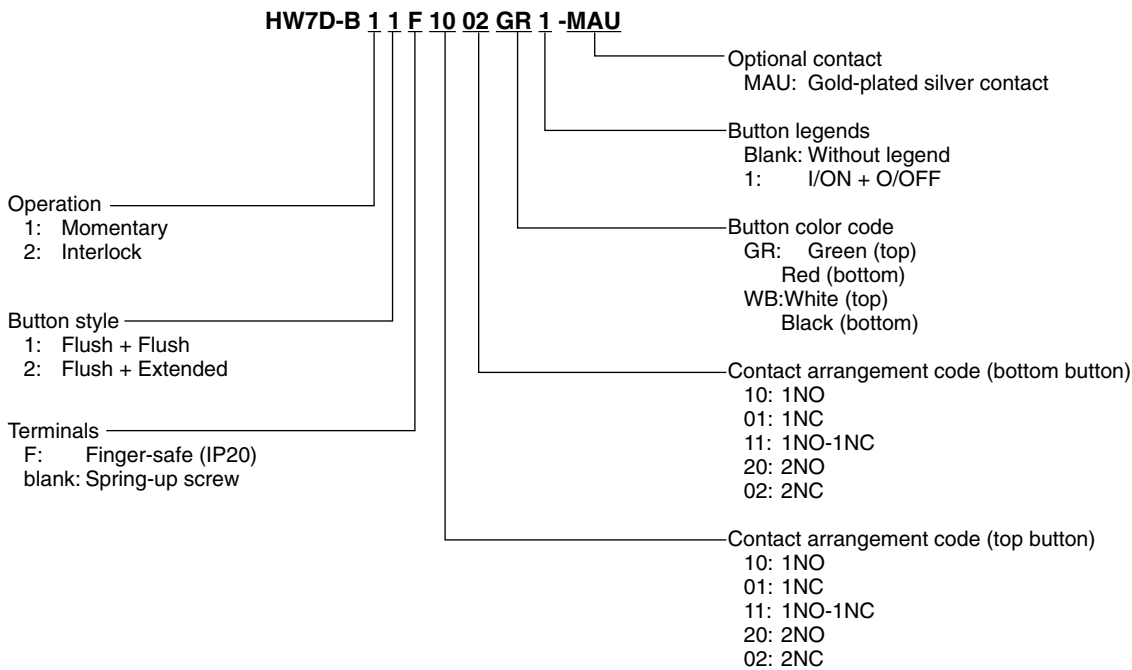

Dual Pushbutton Switches with Pilot Light

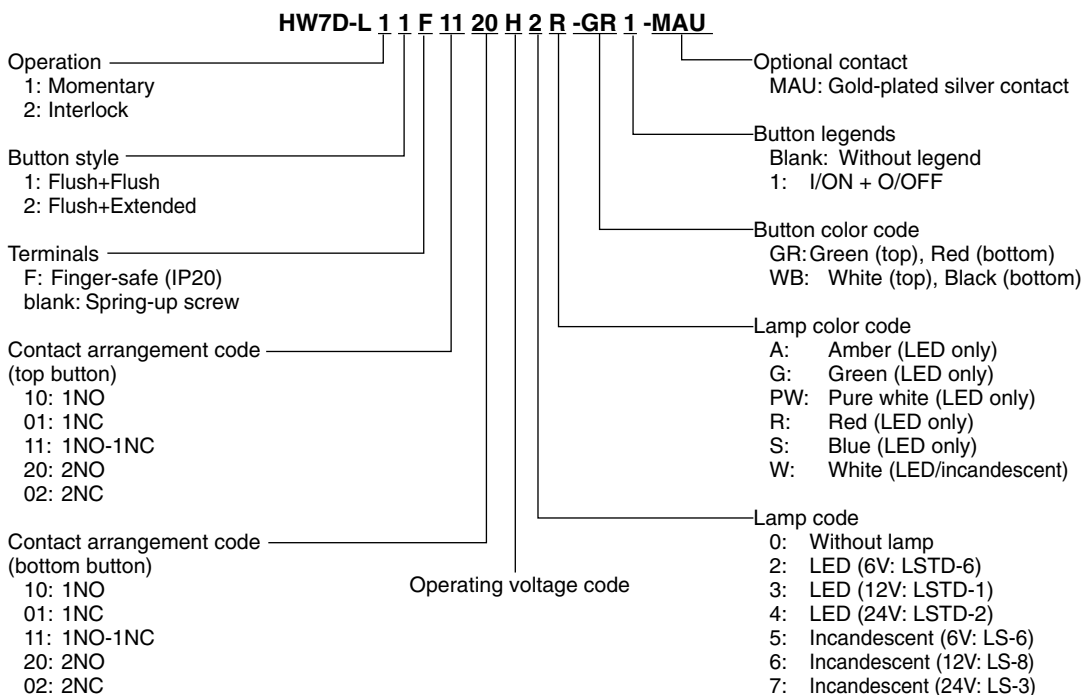

Note: Transformer and DC-DC converter types can have two or four contact blocks only.

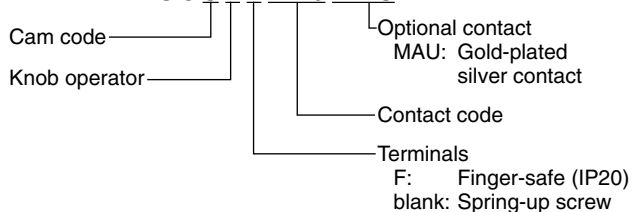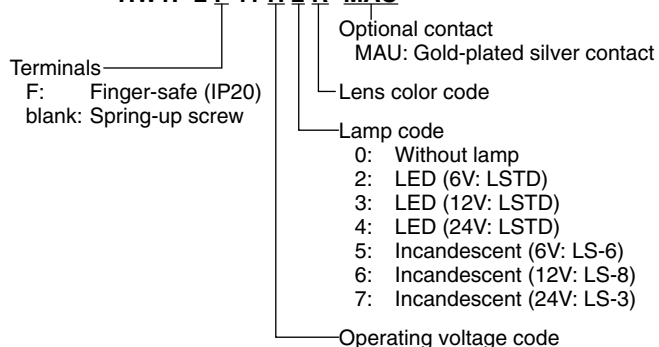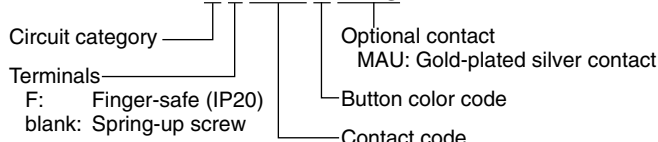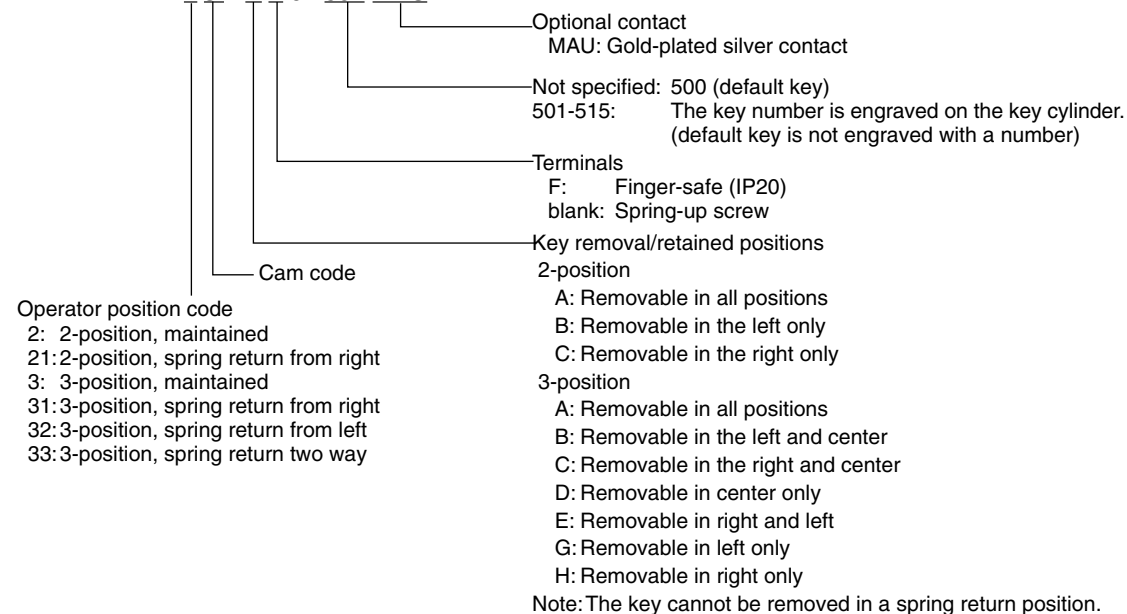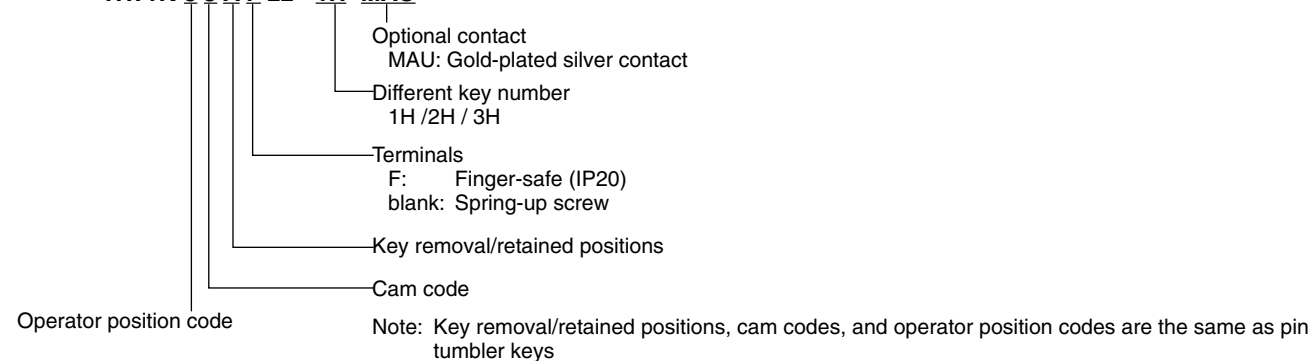Selector Switches**HW1S-J S T F 22N9 -MAU****Illuminated Selector Switches****HW1F-2 F 11 H 2 R -MAU****Pushbutton Selectors****HW1R-2 D F 22N1 B -MAU****Key Selector Switches (Pin Tumbler Key)****HW1K-2 J P A F 01-501-MAU****Key Selector Switches (Disc Tumbler Key)****HW1K-3 J A F 22 - 1H -MAU**Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces



Sensors

Control
StationsExplosion
Protection

References

Flush / Extended / Mushroom Pushbuttons



Package Quantity: 1

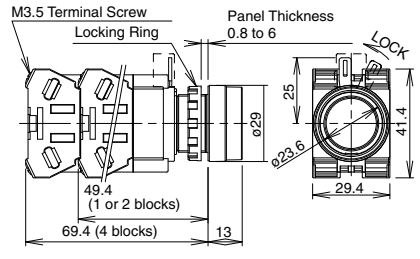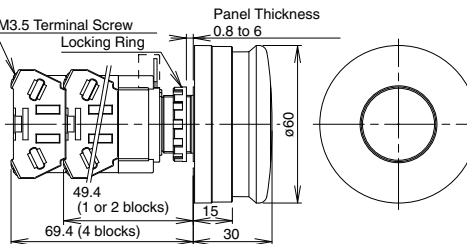Shape	Operation	Contact	Part No.	① Button Color Code	Dimensions (mm) (Spring-up screw terminal)
Flush HW1B-M1 HW1B-A1 	Momentary	1NO	HW1B-M1⑥10①	Specify a button color code in place of ① in the Part No. B: black G: green R: red S: blue W: white Y: yellow	
		1NC	HW1B-M1⑥01①		
		1NO-1NC	HW1B-M1⑥11①		
		2NO	HW1B-M1⑥20①		
		2NC	HW1B-M1⑥02①		
	Maintained	2NO-2NC	HW1B-M1⑥22①		
		1NO	HW1B-A1⑥10①		
		1NC	HW1B-A1⑥01①		
		1NO-1NC	HW1B-A1⑥11①		
		2NO	HW1B-A1⑥20①		
Extended HW1B-M2 HW1B-A2 	Momentary	2NC	HW1B-A1⑥02①		
		2NO-2NC	HW1B-A1⑥22①		
		1NO	HW1B-M2⑥10①		
		1NC	HW1B-M2⑥01①		
		1NO-1NC	HW1B-M2⑥11①		
	Maintained	2NO	HW1B-M2⑥20①		
		2NC	HW1B-M2⑥02①		
		2NO-2NC	HW1B-M2⑥22①		
		1NO	HW1B-A2⑥10①		
		1NC	HW1B-A2⑥01①		
ø29mm Mushroom HW1B-M3 HW1B-A3 	Momentary	1NO-1NC	HW1B-A2⑥11①		
		2NO	HW1B-A2⑥20①		
		2NC	HW1B-A2⑥02①		
		2NO-2NC	HW1B-A2⑥22①		
		1NO	HW1B-M3⑥10①		
	Maintained	1NC	HW1B-M3⑥01①		
		1NO-1NC	HW1B-M3⑥11①		
		2NO	HW1B-M3⑥20①		
		2NC	HW1B-M3⑥02①		
		2NO-2NC	HW1B-M3⑥22①		
ø40mm Mushroom HW1B-M4 HW1B-A4 	Momentary	1NO	HW1B-A3⑥10①		
		1NC	HW1B-A3⑥01①		
		1NO-1NC	HW1B-A3⑥11①		
		2NO	HW1B-A3⑥20①		
		2NC	HW1B-A3⑥02①		
	Maintained	2NO-2NC	HW1B-A3⑥22①		
		1NO	HW1B-M4⑥10①		
		1NC	HW1B-M4⑥01①		
		1NO-1NC	HW1B-M4⑥11①		
		2NO	HW1B-M4⑥20①		
ø60mm Mushroom HW1B-M5 	Momentary	2NC	HW1B-M4⑥02①		
		2NO-2NC	HW1B-M4⑥22①		
		1NO	HW1B-A4⑥10①		
		1NC	HW1B-A4⑥01①		
		1NO-1NC	HW1B-A4⑥11①		
	Momentary	2NO	HW1B-A4⑥20①		
		2NC	HW1B-A4⑥02①		
		2NO-2NC	HW1B-A4⑥22①		
		1NO	HW1B-M⑤⑥10①		
		1NC	HW1B-M⑤⑥01①		
Momentary	1NO-1NC	HW1B-M⑤⑥11①			
	2NO	HW1B-M⑤⑥20①			
	2NC	HW1B-M⑤⑥02①			
2NO-2NC	HW1B-M⑤⑥22①				
					

- Specify a terminal style code in place of ⑥ in the Part No. F: Finger-safe (IP20), blank: Spring-up screw
- Pushbuttons with one or three contact blocks contain a dummy block.
- Other contact arrangements and gold-plated silver contacts are also available. See page 219.
- The depth of each finger-safe (IP20) contact block is 0.9 mm longer than that of a spring-up screw contact block.

Square Flush / Square Extended Pushbuttons


Package Quantity: 1

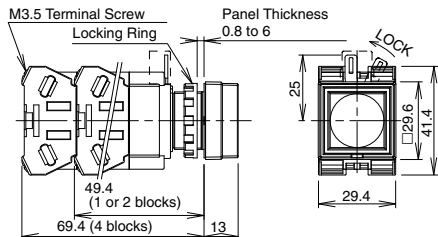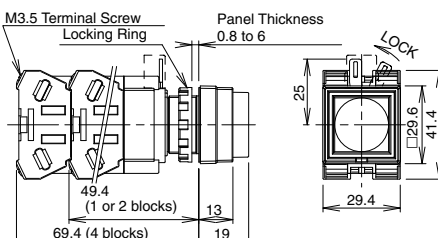Shape	Operation	Contact	Part No.	① Button Color Code	Dimensions (mm) (Spring-up screw terminal)
Square Flush HW2B-M1 HW2B-A1  	Momentary	1NO	HW2B-M1⑥10①	Specify a button color code in place of ① in the Part No. B: black G: green R: red S: blue W: white Y: yellow	
		1NC	HW2B-M1⑥01①		
		1NO-1NC	HW2B-M1⑥11①		
		2NO	HW2B-M1⑥20①		
		2NC	HW2B-M1⑥02①		
	Maintained	2NO-2NC	HW2B-M1⑥22①		
		1NO	HW2B-A1⑥10①		
		1NC	HW2B-A1⑥01①		
		1NO-1NC	HW2B-A1⑥11①		
		2NO	HW2B-A1⑥20①		
Square Extended HW2B-M2 HW2B-A2  	Momentary	1NO	HW2B-M2⑥10①		
		1NC	HW2B-M2⑥01①		
		1NO-1NC	HW2B-M2⑥11①		
		2NO	HW2B-M2⑥20①		
		2NC	HW2B-M2⑥02①		
	Maintained	2NO-2NC	HW2B-M2⑥22①		
		1NO	HW2B-A2⑥10①		
		1NC	HW2B-A2⑥01①		
		1NO-1NC	HW2B-A2⑥11①		
		2NO	HW2B-A2⑥20①		
		2NC	HW2B-A2⑥02①		
		2NO-2NC	HW2B-A2⑥22①		

- Specify a terminal style code in place of ⑥ in the Part No. F: Finger-safe (IP20), blank: Spring-up screw
- Pushbuttons with one or three contact blocks contain a dummy block.
- Other contact arrangements and gold-plated silver contacts are also available. See page 219.
- The depth of each finger-safe (IP20) contact block is 0.9 mm longer than that of a spring-up screw contact block.


Contact Block (Bottom View)

Spring-up screw terminal



Terminal Wiring

Arrows indicate access directions for wiring.



*Spring-up screw terminals only.

Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces




Sensors

Control
StationsExplosion
Protection

References

Round Button with Square Bezel Pushbuttons


Package Quantity: 1

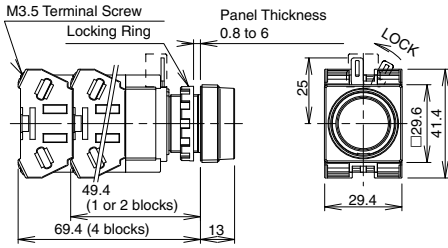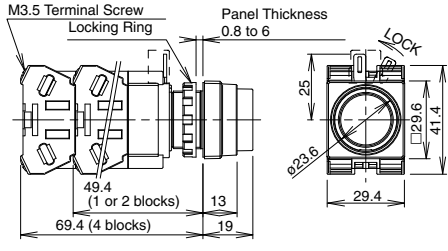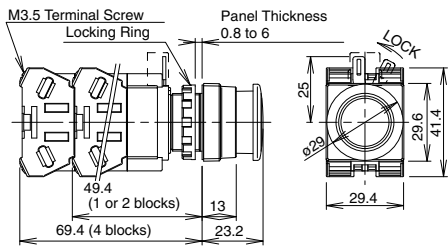Shape	Operation	Contact	Part No.	① Button Color Code	Dimensions (mm) (Spring-up screw terminal)
Round Flush with Square Bezel HW3B-M1 HW3B-A1 	Momentary	1NO	HW3B-M1⑥10①	Specify a button color code in place of ① in the Part No. B: black G: green R: red S: blue W: white Y: yellow	
		1NC	HW3B-M1⑥01①		
		1NO-1NC	HW3B-M1⑥11①		
		2NO	HW3B-M1⑥20①		
		2NC	HW3B-M1⑥02①		
	Maintained	2NO-2NC	HW3B-M1⑥22①		
		1NO	HW3B-A1⑥10①		
		1NC	HW3B-A1⑥01①		
		1NO-1NC	HW3B-A1⑥11①		
		2NO	HW3B-A1⑥20①		
Round Extended with Square Bezel HW3B-M2 HW3B-A2 	Momentary	2NC	HW3B-A1⑥02①		
		2NO-2NC	HW3B-A1⑥22①		
	Maintained	1NO	HW3B-M2⑥10①		
		1NC	HW3B-M2⑥01①		
		1NO-1NC	HW3B-M2⑥11①		
		2NO	HW3B-M2⑥20①		
		2NC	HW3B-M2⑥02①		
	Maintained	2NO-2NC	HW3B-M2⑥22①		
		1NO	HW3B-A2⑥10①		
		1NC	HW3B-A2⑥01①		
		1NO-1NC	HW3B-A2⑥11①		
ø29mm Mushroom with Square Bezel HW3B-M3 HW3B-A3 	Momentary	2NO	HW3B-A2⑥20①		
		2NC	HW3B-A2⑥02①		
		2NO-2NC	HW3B-A2⑥22①		
	Maintained	1NO	HW3B-M3⑥10①		
		1NC	HW3B-M3⑥01①		
		1NO-1NC	HW3B-M3⑥11①		
		2NO	HW3B-M3⑥20①		
		2NC	HW3B-M3⑥02①		
	Maintained	2NO-2NC	HW3B-M3⑥22①		
		1NO	HW3B-A3⑥10①		
		1NC	HW3B-A3⑥01①		
		1NO-1NC	HW3B-A3⑥11①		
		2NO	HW3B-A3⑥20①		
		2NC	HW3B-A3⑥02①		
		2NO-2NC	HW3B-A3⑥22①		

- Specify a terminal style code in place of ⑥ in the Part No. F: Finger-safe (IP20), blank: Spring-up screw
- Pushbuttons with one or three contact blocks contain a dummy block.
- Other contact arrangements and gold-plated silver contacts are also available. See page 219.
- The depth of each finger-safe (IP20) contact block is 0.9 mm longer than that of a spring-up screw contact block.


Contact Block (Bottom View)

Spring-up screw terminal



Terminal Wiring

Arrows indicate access directions for wiring.



HW Series Pilot Lights ø22

Round Flush / Dome / Square Flush / Jumbo Dome Pilot Lights

Package Quantity: 1

Shape	Lamp	Part No.	② Lens/Illumination Color Code
Round Flush HW1P-1  (Photo: Full Voltage) 	Without Lamp	HW1P-1⑥Q0②	A: amber, G: green, R: red, S: blue, W: white, Y: yellow
	LED	HW1P-1⑥③②	A: amber, G: green, PW: pure white, R: red, S: blue, W: white, Y: yellow
	Incandescent	HW1P-1⑥③②	A: amber, G: green, R: red, S: blue, W: white
Dome HW1P-2  (Photo: Full Voltage) 	Without Lamp	HW1P-2⑥Q0②	A: amber, G: green, R: red, S: blue, W: white, Y: yellow
	LED	HW1P-2⑥③②	A: amber, G: green, PW: pure white, R: red, S: blue, W: white, Y: yellow
	Incandescent	HW1P-2⑥③②	A: amber, G: green, R: red, S: blue, W: white
Square Flush HW2P-1  (Photo: Transformer) 	Without Lamp	HW2P-1⑥Q0②	A: amber, G: green, R: red, S: blue, W: white, Y: yellow
	LED	HW2P-1⑥③②	A: amber, G: green, PW: pure white, R: red, S: blue, W: white, Y: yellow
	Incandescent	HW2P-1⑥③②	A: amber, G: green, R: red, S: blue, W: white
Jumbo Dome Pilot Light HW1P-5  	LED	HW1P-5Q4②	A: amber, G: green, PW: pure white, R: red, S: blue, W: white, Y: yellow
	Incandescent	HW1P-5Q7②	A: amber, G: green, R: red, S: blue, W: white, Y: yellow

Designation Code

Specify an designation code in place of ③, or ⑥ in the Part No.

③ Operating Voltage Code		Input Type	⑥ Terminal Style Code
LED	Incandescent		
Q2: 6V AC/DC	Q5: 6V AC/DC	Full Voltage	Specify a terminal style code in place of ⑥. F: Finger-safe (IP20) blank: Spring-up screw Only spring-up screw terminals are available on DC-DC converter types.
Q3: 12V AC/DC	Q6: 12V AC/DC		
Q4: 24V AC/DC	Q7: 24V AC/DC		
H2: 100/110V AC	H5: 100/110V AC	Transformer	
H22: 115/120V AC	H25: 115/120V AC		
M2: 200/220V AC	M5: 200/220V AC		
M42: 230/240V AC	M45: 230/240V AC		
S2: 380V AC	S5: 380V AC		
T2: 400/440V AC	T5: 400/440V AC		
T82: 480V AC	T85: 480V AC		
D2: 110V DC	—	DC-DC Converter*	

• Use a pure white LED lamp for yellow illumination.

• Jumbo dome pilot lights contain an exclusive LED and incandescent lamp. See page 261.


*DC-DC converter types are not approved by UL, CSA, and TÜV, and not CE compliant (operating voltage 90 to 140V DC)

ø22 HW Series Pilot Lights


Dimensions

Pilot Light (except jumbo dome pilot light)


[Full Voltage]

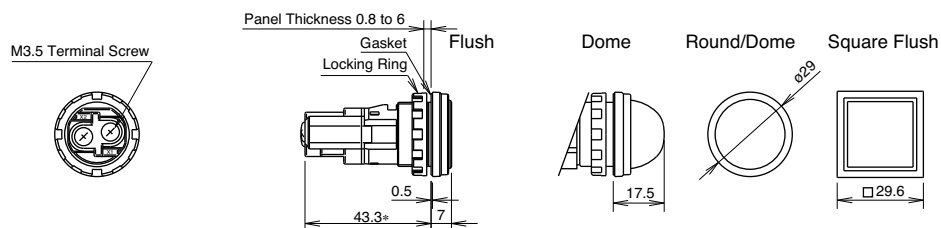

[Transformer]

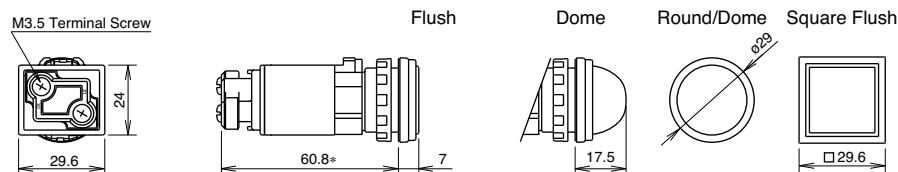

[DC-DC Converter]

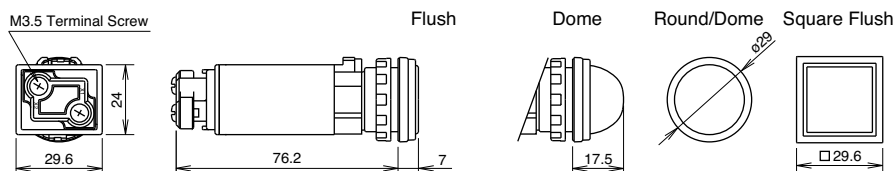

The above figures illustrate the spring-up screw pilot lights.


*The depths of finger-safe (IP20) pilot lights are as follows:

[Full Voltage] 44.7 mm

[Full Voltage]	11.7 mm
[Transformer]	72.1 mm

All dimensions in mm.

Jumbo Dome Pilot Light

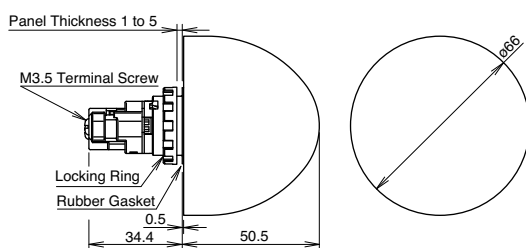


Mounting Hole Layout

Pilot Light (except jumbo dome pilot light)


Close mounting on 30mm centers

Degree of protection: IP65



When mounting transformer or DC-DC converter type units on 30mm centers vertically and horizontally, keep the ambient temperature below 40°C.

Jumbo Dome Pilot Light



HW Series Illuminated Pushbuttons ø22

Round Flush Illuminated Pushbuttons

Package Quantity: 1

Shape	Operation	Lamp	Contact	Part No.
Round Flush HW1L-M1 HW1L-A1 	Momentary	Without Lamp	1NO	HW1L-M1⑥10Q0②
			1NC	HW1L-M1⑥01Q0②
			1NO-1NC	HW1L-M1⑥11Q0②
			2NO	HW1L-M1⑥20Q0②
			2NC	HW1L-M1⑥02Q0②
			2NO-2NC	HW1L-M1⑥22Q0②
		LED / Incandescent	1NO	HW1L-M1⑥10③② (Note)
			1NC	HW1L-M1⑥01③② (Note)
			1NO-1NC	HW1L-M1⑥11③②
			2NO	HW1L-M1⑥20③②
			2NC	HW1L-M1⑥02③②
			2NO-2NC	HW1L-M1⑥22③②
	Maintained	Without Lamp	1NO	HW1L-A1⑥10Q0②
			1NC	HW1L-A1⑥01Q0②
			1NO-1NC	HW1L-A1⑥11Q0②
			2NO	HW1L-A1⑥20Q0②
			2NC	HW1L-A1⑥02Q0②
			2NO-2NC	HW1L-A1⑥22Q0②
		LED / Incandescent	1NO	HW1L-A1⑥10③② (Note)
			1NC	HW1L-A1⑥01③② (Note)
			1NO-1NC	HW1L-A1⑥11③②
			2NO	HW1L-A1⑥20③②
			2NC	HW1L-A1⑥02③②
			2NO-2NC	HW1L-A1⑥22③②
			1NO	HW1L-A1⑥10③② (Note)
			1NC	HW1L-A1⑥01③② (Note)
			1NO-1NC	HW1L-A1⑥11③②
			2NO	HW1L-A1⑥20③②
			2NC	HW1L-A1⑥02③②
			2NO-2NC	HW1L-A1⑥22③②

Note: Only full voltage types are available.

Designation Code

Specify a designation code in place of ②, ③, or ⑥ in the Part No.

② Lens/Illumination Color Code			③ Operating Voltage Code		Input Type	⑥ Terminal Style Code
Without Lamp	LED	Incandescent	LED	Incandescent		
A: amber G: green R: red S: blue W: white Y: yellow	A: amber G: green PW: pure white R: red S: blue W: white Y: yellow	A: amber G: green R: red S: blue W: white	Q2: 6V AC/DC	Q5: 6V AC/DC	Full Voltage	F: Finger-safe (IP20) blank: Spring-up screw Only spring-up screw terminals are available on DC-DC converter types.
			Q3: 12V AC/DC	Q6: 12V AC/DC		
			Q4: 24V AC/DC	Q7: 24V AC/DC		
			H2: 100/110V AC	H5: 100/110V AC	Transformer	
			H22: 115/120V AC	H25: 115/120V AC		
			M2: 200/220V AC	M5: 200/220V AC		
			M42: 230/240V AC	M45: 230/240V AC		
			S2: 380V AC	S5: 380V AC		
			T2: 400/440V AC	T5: 400/440V AC		
			T82: 480V AC	T85: 480V AC		
D2: 110V DC	—	DC-DC Converter*				

• Use a pure white LED lamp for yellow illumination.

• Other contact arrangements and gold-plated silver contacts available. See page 219.

*DC-DC converter types are not approved by UL, CSA, and TÜV, and not CE compliant (operating voltage 90 to 140V DC)

Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces

Sensors

Control
StationsExplosion
Protection

References

ø22 HW series Illuminated Pushbuttons

Round Extended Illuminated Pushbuttons

Package Quantity: 1

Shape	Operation	Lamp	Contact	Part No.
Round Extended HW1L-M2 HW1L-A2 	Momentary	Without Lamp	1NO	HW1L-M2②③④10Q0②
			1NC	HW1L-M2②③④01Q0②
			1NO-1NC	HW1L-M2②③④11Q0②
			2NO	HW1L-M2②③④20Q0②
			2NC	HW1L-M2②③④02Q0②
			2NO-2NC	HW1L-M2②③④22Q0②
		LED / Incandescent	1NO	HW1L-M2②③④10③② (Note)
			1NC	HW1L-M2②③④01③② (Note)
			1NO-1NC	HW1L-M2②③④11③②
			2NO	HW1L-M2②③④20③②
			2NC	HW1L-M2②③④02③②
			2NO-2NC	HW1L-M2②③④22③②
	Maintained	Without Lamp	1NO	HW1L-A2②③④10Q0②
			1NC	HW1L-A2②③④01Q0②
			1NO-1NC	HW1L-A2②③④11Q0②
			2NO	HW1L-A2②③④20Q0②
			2NC	HW1L-A2②③④02Q0②
			2NO-2NC	HW1L-A2②③④22Q0②
		LED / Incandescent	1NO	HW1L-A2②③④10③② (Note)
			1NC	HW1L-A2②③④01③② (Note)
			1NO-1NC	HW1L-A2②③④11③②
			2NO	HW1L-A2②③④20③②
			2NC	HW1L-A2②③④02③②
			2NO-2NC	HW1L-A2②③④22③②

Note: Only full voltage types are available.

Designation Code

Specify a designation code in place of ②, ③, or ④ in the Part No.

② Lens/Illumination Color Code			③ Operating Voltage Code		Input Type	⑥ Terminal Style Code
Without Lamp	LED	Incandescent	LED	Incandescent		
A: amber G: green R: red S: blue W: white Y: yellow	A: amber G: green PW: pure white R: red S: blue W: white Y: yellow	A: amber G: green R: red S: blue W: white	Q2: 6V AC/DC	Q5: 6V AC/DC	Full Voltage	F: Finger-safe (IP20) blank: Spring-up screw Only spring-up screw terminals are available on DC-DC converter types.
			Q3: 12V AC/DC	Q6: 12V AC/DC		
			Q4: 24V AC/DC	Q7: 24V AC/DC		
			H2: 100/110V AC	H5: 100/110V AC	Transformer	
			H22: 115/120V AC	H25: 115/120V AC		
			M2: 200/220V AC	M5: 200/220V AC		
			M42: 230/240V AC	M45: 230/240V AC		
			S2: 380V AC	S5: 380V AC		
			T2: 400/440V AC	T5: 400/440V AC		
			T82: 480V AC	T85: 480V AC		
D2: 110V DC	—	DC-DC Converter*				

• Use a pure white LED lamp for yellow illumination.

• Other contact arrangements and gold-plated silver contacts available. See page 219.

*DC-DC converter types are not approved by UL, CSA, and TÜV, and not CE compliant (operating voltage 90 to 140V DC)

HW Series Illuminated Pushbuttons ø22

Round Extended with Full Shroud Illuminated Pushbuttons

Package Quantity: 1

Shape	Operation	Lamp	Contact	Part No.
Round Extended with Full Shroud HW1L-MF2 HW1L-AF2 	Momentary	Without Lamp	1NO	HW1L-MF2⑥10Q0②
			1NC	HW1L-MF2⑥01Q0②
			1NO-1NC	HW1L-MF2⑥11Q0②
			2NO	HW1L-MF2⑥20Q0②
			2NC	HW1L-MF2⑥02Q0②
			2NO-2NC	HW1L-MF2⑥22Q0②
		LED / Incandescent	1NO	HW1L-MF2⑥10③② (Note)
			1NC	HW1L-MF2⑥01③② (Note)
			1NO-1NC	HW1L-MF2⑥11③②
			2NO	HW1L-MF2⑥20③②
			2NC	HW1L-MF2⑥02③②
			2NO-2NC	HW1L-MF2⑥22③②
	Maintained	Without Lamp	1NO	HW1L-AF2⑥10Q0②
			1NC	HW1L-AF2⑥01Q0②
			1NO-1NC	HW1L-AF2⑥11Q0②
			2NO	HW1L-AF2⑥20Q0②
			2NC	HW1L-AF2⑥02Q0②
			2NO-2NC	HW1L-AF2⑥22Q0②
		LED / Incandescent	1NO	HW1L-AF2⑥10③② (Note)
			1NC	HW1L-AF2⑥01③② (Note)
			1NO-1NC	HW1L-AF2⑥11③②
			2NO	HW1L-AF2⑥20③②
			2NC	HW1L-AF2⑥02③②
			2NO-2NC	HW1L-AF2⑥22③②

Note: Only full voltage types are available.

Designation Code

Specify a designation code in place of ②, ③, or ⑥ in the Part No.

② Lens/Illumination Color Code			③ Operating Voltage Code		Input Type	⑥ Terminal Style Code
Without Lamp	LED	Incandescent	LED	Incandescent		
A: amber G: green R: red S: blue W: white Y: yellow	A: amber G: green PW: pure white R: red S: blue W: white Y: yellow	A: amber G: green R: red S: blue W: white	Q2: 6V AC/DC	Q5: 6V AC/DC	Full Voltage	F: Finger-safe (IP20) blank: Spring-up screw Only spring-up screw terminals are available on DC-DC converter types.
			Q3: 12V AC/DC	Q6: 12V AC/DC		
			Q4: 24V AC/DC	Q7: 24V AC/DC		
			H2: 100/110V AC	H5: 100/110V AC	Transformer	
			H22: 115/120V AC	H25: 115/120V AC		
			M2: 200/220V AC	M5: 200/220V AC		
			M42: 230/240V AC	M45: 230/240V AC		
			S2: 380V AC	S5: 380V AC		
			T2: 400/440V AC	T5: 400/440V AC		
			T82: 480V AC	T85: 480V AC		
D2: 110V DC	—	DC-DC Converter*				

• Use a pure white LED lamp for yellow illumination.

• Other contact arrangements and gold-plated silver contacts available. See page 219.

*DC-DC converter types are not approved by UL, CSA, and TÜV, and not CE compliant (operating voltage 90 to 140V DC)

Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces

Sensors

Control
StationsExplosion
Protection

References

ø22 HW series Illuminated Pushbuttons

Square Flush Illuminated Pushbuttons

Package Quantity: 1

Shape	Operation	Lamp	Contact	Part No.
Square Flush HW2L-M1 HW2L-A1 	Momentary	Without Lamp	1NO	HW2L-M1⑥10Q0②
			1NC	HW2L-M1⑥01Q0②
			1NO-1NC	HW2L-M1⑥11Q0②
			2NO	HW2L-M1⑥20Q0②
			2NC	HW2L-M1⑥02Q0②
			2NO-2NC	HW2L-M1⑥22Q0②
		LED / Incandescent	1NO	HW2L-M1⑥10③② (Note)
			1NC	HW2L-M1⑥01③② (Note)
			1NO-1NC	HW2L-M1⑥11③②
			2NO	HW2L-M1⑥20③②
			2NC	HW2L-M1⑥02③②
			2NO-2NC	HW2L-M1⑥22③②
	Maintained	Without Lamp	1NO	HW2L-A1⑥10Q0②
			1NC	HW2L-A1⑥01Q0②
			1NO-1NC	HW2L-A1⑥11Q0②
			2NO	HW2L-A1⑥20Q0②
			2NC	HW2L-A1⑥02Q0②
			2NO-2NC	HW2L-A1⑥22Q0②
		LED / Incandescent	1NO	HW2L-A1⑥10③② (Note)
			1NC	HW2L-A1⑥01③② (Note)
			1NO-1NC	HW2L-A1⑥11③②
			2NO	HW2L-A1⑥20③②
			2NC	HW2L-A1⑥02③②
			2NO-2NC	HW2L-A1⑥22③②

Note: Only full voltage types are available.

Designation Code

Specify a designation code in place of ②, ③, or ⑥ in the Part No.

② Lens/Illumination Color Code			③ Operating Voltage Code		Input Type	⑥ Terminal Style Code
Without Lamp	LED	Incandescent	LED	Incandescent		
A: amber G: green R: red S: blue W: white Y: yellow	A: amber G: green PW: pure white R: red S: blue S: blue W: white Y: yellow	A: amber G: green R: red S: blue W: white	Q2: 6V AC/DC	Q5: 6V AC/DC	Full Voltage	F: Finger-safe (IP20) blank: Spring-up screw Only spring-up screw terminals are available on DC-DC converter types.
			Q3: 12V AC/DC	Q6: 12V AC/DC		
			Q4: 24V AC/DC	Q7: 24V AC/DC		
			H2: 100/110V AC	H5: 100/110V AC	Transformer	
			H22: 115/120V AC	H25: 115/120V AC		
			M2: 200/220V AC	M5: 200/220V AC		
			M42: 230/240V AC	M45: 230/240V AC		
			S2: 380V AC	S5: 380V AC		
			T2: 400/440V AC	T5: 400/440V AC		
			T82: 480V AC	T85: 480V AC		
D2: 110V DC	—	DC-DC Converter*				

• Use a pure white LED lamp for yellow illumination.

• Other contact arrangements and gold-plated silver contacts available. See page 219.

*DC-DC converter types are not approved by UL, CSA, and TÜV, and not CE compliant (operating voltage 90 to 140V DC)

HW Series Illuminated Pushbuttons ø22

Round Flush with Square Bezel Illuminated Pushbuttons

Package Quantity: 1

Shape	Operation	Lamp	Contact	Part No.
Round Flush with Square Bezel HW3L-M1 HW3L-A1 	Momentary	Without Lamp	1NO	HW3L-M1⑥10Q0②
			1NC	HW3L-M1⑥01Q0②
			1NO-1NC	HW3L-M1⑥11Q0②
			2NO	HW3L-M1⑥20Q0②
			2NC	HW3L-M1⑥02Q0②
			2NO-2NC	HW3L-M1⑥22Q0②
		LED / Incandescent	1NO	HW3L-M1⑥10③② (Note)
			1NC	HW3L-M1⑥01③② (Note)
			1NO-1NC	HW3L-M1⑥11③②
			2NO	HW3L-M1⑥20③②
			2NC	HW3L-M1⑥02③②
			2NO-2NC	HW3L-M1⑥22③②
	Maintained	Without Lamp	1NO	HW3L-A1⑥10Q0②
			1NC	HW3L-A1⑥01Q0②
			1NO-1NC	HW3L-A1⑥11Q0②
			2NO	HW3L-A1⑥20Q0②
			2NC	HW3L-A1⑥02Q0②
			2NO-2NC	HW3L-A1⑥22Q0②
		LED / Incandescent	1NO	HW3L-A1⑥10③② (Note)
			1NC	HW3L-A1⑥01③② (Note)
			1NO-1NC	HW3L-A1⑥11③②
			2NO	HW3L-A1⑥20③②
			2NC	HW3L-A1⑥02③②
			2NO-2NC	HW3L-A1⑥22③②

Note: Only full voltage types are available.

Designation Code

Specify a designation code in place of ②, ③, or ⑥ in the Part No.

② Lens/Illumination Color Code			③ Operating Voltage Code		Input Type	⑥ Terminal Style Code
Without Lamp	LED	Incandescent	LED	Incandescent		
A: amber G: green R: red S: blue W: white Y: yellow	A: amber G: green PW: pure white R: red S: blue W: white Y: yellow	A: amber G: green R: red S: blue W: white	Q2: 6V AC/DC	Q5: 6V AC/DC	Full Voltage	F: Finger-safe (IP20) blank: Spring-up screw Only spring-up screw terminals are available on DC-DC converter types.
			Q3: 12V AC/DC	Q6: 12V AC/DC		
			Q4: 24V AC/DC	Q7: 24V AC/DC		
			H2: 100/110V AC	H5: 100/110V AC	Transformer	
			H22: 115/120V AC	H25: 115/120V AC		
			M2: 200/220V AC	M5: 200/220V AC		
			M42: 230/240V AC	M45: 230/240V AC		
			S2: 380V AC	S5: 380V AC		
			T2: 400/440V AC	T5: 400/440V AC		
			T82: 480V AC	T85: 480V AC		
D2: 110V DC	—	DC-DC Converter*				

• Use a pure white LED lamp for yellow illumination.

• Other contact arrangements and gold-plated silver contacts available. See page 219.

*DC-DC converter types are not approved by UL, CSA, and TÜV, and not CE compliant (operating voltage 90 to 140V DC)

Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces

Sensors

Control
StationsExplosion
Protection

References

ø22 HW series Illuminated Pushbuttons

Mushroom (ø29mm) Illuminated Pushbuttons

Package Quantity: 1

Shape	Operation	Lamp	Contact	Part No.
ø29mm Mushroom HW1L-M3 HW1L-A3 	Momentary	Without Lamp	1NO	HW1L-M3⑥10Q0②
			1NC	HW1L-M3⑥01Q0②
			1NO-1NC	HW1L-M3⑥11Q0②
			2NO	HW1L-M3⑥20Q0②
			2NC	HW1L-M3⑥02Q0②
			2NO-2NC	HW1L-M3⑥22Q0②
		LED / Incandescent	1NO	HW1L-M3⑥10③② (Note)
			1NC	HW1L-M3⑥01③② (Note)
			1NO-1NC	HW1L-M3⑥11③②
			2NO	HW1L-M3⑥20③②
			2NC	HW1L-M3⑥02③②
			2NO-2NC	HW1L-M3⑥22③②
	Maintained	Without Lamp	1NO	HW1L-A3⑥10Q0②
			1NC	HW1L-A3⑥01Q0②
			1NO-1NC	HW1L-A3⑥11Q0②
			2NO	HW1L-A3⑥20Q0②
			2NC	HW1L-A3⑥02Q0②
			2NO-2NC	HW1L-A3⑥22Q0②
		LED / Incandescent	1NO	HW1L-A3⑥10③② (Note)
			1NC	HW1L-A3⑥01③② (Note)
			1NO-1NC	HW1L-A3⑥11③②
			2NO	HW1L-A3⑥20③②
			2NC	HW1L-A3⑥02③②
			2NO-2NC	HW1L-A3⑥22③②

Note: Only full voltage types are available.

Designation Code

Specify a designation code in place of ②, ③, or ⑥ in the Part No.

② Lens/Illumination Color Code			③ Operating Voltage Code		Input Type	⑥ Terminal Style Code
Without Lamp	LED	Incandescent	LED	Incandescent		
A: amber G: green R: red S: blue W: white Y: yellow	A: amber G: green PW: pure white R: red S: blue S: blue W: white Y: yellow	A: amber G: green R: red S: blue W: white	Q2: 6V AC/DC	Q5: 6V AC/DC	Full Voltage	F: Finger-safe (IP20) blank: Spring-up screw Only spring-up screw terminals are available on DC-DC converter types.
			Q3: 12V AC/DC	Q6: 12V AC/DC		
			Q4: 24V AC/DC	Q7: 24V AC/DC		
			H2: 100/110V AC	H5: 100/110V AC	Transformer	
			H22: 115/120V AC	H25: 115/120V AC		
			M2: 200/220V AC	M5: 200/220V AC		
			M42: 230/240V AC	M45: 230/240V AC		
			S2: 380V AC	S5: 380V AC		
			T2: 400/440V AC	T5: 400/440V AC		
			T82: 480V AC	T85: 480V AC		
			D2: 110V DC	—		

• Use a pure white LED lamp for yellow illumination.

• Other contact arrangements and gold-plated silver contacts available. See page 219.

*DC-DC converter types are not approved by UL, CSA, and TÜV, and not CE compliant (operating voltage 90 to 140V DC)

HW Series Illuminated Pushbuttons ø22

Mushroom (ø29mm) with Square Bezel Illuminated Pushbuttons

Package Quantity: 1

Shape	Operation	Lamp	Contact	Part No.
ø29mm Mushroom with Square Bezel HW3L-M3 HW3L-A3 	Momentary	Without Lamp	1NO	HW3L-M3⑥10Q0②
			1NC	HW3L-M3⑥01Q0②
			1NO-1NC	HW3L-M3⑥11Q0②
			2NO	HW3L-M3⑥20Q0②
			2NC	HW3L-M3⑥02Q0②
			2NO-2NC	HW3L-M3⑥22Q0②
		LED / Incandescent	1NO	HW3L-M3⑥10③② (Note)
			1NC	HW3L-M3⑥01③② (Note)
			1NO-1NC	HW3L-M3⑥11③②
			2NO	HW3L-M3⑥20③②
			2NC	HW3L-M3⑥02③②
			2NO-2NC	HW3L-M3⑥22③②
	Maintained	Without Lamp	1NO	HW3L-A3⑥10Q0②
			1NC	HW3L-A3⑥01Q0②
			1NO-1NC	HW3L-A3⑥11Q0②
			2NO	HW3L-A3⑥20Q0②
			2NC	HW3L-A3⑥02Q0②
			2NO-2NC	HW3L-A3⑥22Q0②
		LED / Incandescent	1NO	HW3L-A3⑥10③② (Note)
			1NC	HW3L-A3⑥01③② (Note)
			1NO-1NC	HW3L-A3⑥11③②
			2NO	HW3L-A3⑥20③②
			2NC	HW3L-A3⑥02③②
			2NO-2NC	HW3L-A3⑥22③②



Note: Only full voltage types are available.

Designation Code

Specify a designation code in place of ②, ③, or ⑥ in the Part No.

② Lens/Illumination Color Code			③ Operating Voltage Code		Input Type	⑥ Terminal Style Code
Without Lamp	LED	Incandescent	LED	Incandescent		
A: amber G: green R: red S: blue W: white Y: yellow	A: amber G: green PW: pure white R: red S: blue W: white Y: yellow	A: amber G: green R: red S: blue W: white	Q2: 6V AC/DC	Q5: 6V AC/DC	Full Voltage	F: Finger-safe (IP20) blank: Spring-up screw Only spring-up screw terminals are available on DC-DC converter types.
			Q3: 12V AC/DC	Q6: 12V AC/DC		
			Q4: 24V AC/DC	Q7: 24V AC/DC		
			H2: 100/110V AC	H5: 100/110V AC	Transformer	
			H22: 115/120V AC	H25: 115/120V AC		
			M2: 200/220V AC	M5: 200/220V AC		
			M42: 230/240V AC	M45: 230/240V AC		
			S2: 380V AC	S5: 380V AC		
			T2: 400/440V AC	T5: 400/440V AC		
			T82: 480V AC	T85: 480V AC		
D2: 110V DC	—	DC-DC Converter*				

• Use a pure white LED lamp for yellow illumination.

• Other contact arrangements and gold-plated silver contacts available. See page 219.

*DC-DC converter types are not approved by UL, CSA, and TÜV, and not CE compliant (operating voltage 90 to 140V DC)

Flush Silhouette

Switches & Pilot Lights

Display Lights

LED Illumination Units

Display Units

Safety Products

Terminal Blocks

Comm. Terminals

AS-Interface

Relays & Timers

Sockets

Circuit Protectors

Power Supplies

PLCs & SmartRelay

Operator Interfaces

Sensors

Control Stations

Explosion Protection

References

ø22 HW series Illuminated Pushbuttons

Mushroom (ø40mm) Illuminated Pushbuttons

Package Quantity: 1

Shape	Operation	Lamp	Contact	Part No.
ø40mm Mushroom HW1L-M4 HW1L-A4 	Momentary	Without Lamp	1NO	HW1L-M4⑥10Q0②
			1NC	HW1L-M4⑥01Q0②
			1NO-1NC	HW1L-M4⑥11Q0②
			2NO	HW1L-M4⑥20Q0②
			2NC	HW1L-M4⑥02Q0②
			2NO-2NC	HW1L-M4⑥22Q0②
		LED / Incandescent	1NO	HW1L-M4⑥10③② (Note)
			1NC	HW1L-M4⑥01③② (Note)
			1NO-1NC	HW1L-M4⑥11③②
			2NO	HW1L-M4⑥20③②
	Maintained	Without Lamp	2NC	HW1L-M4⑥02③②
			2NO-2NC	HW1L-M4⑥22③②
			1NO	HW1L-A4⑥10Q0②
			1NC	HW1L-A4⑥01Q0②
			1NO-1NC	HW1L-A4⑥11Q0②
			2NO	HW1L-A4⑥20Q0②
			2NC	HW1L-A4⑥02Q0②
			2NO-2NC	HW1L-A4⑥22Q0②
		LED / Incandescent	1NO	HW1L-A4⑥10③② (Note)
			1NC	HW1L-A4⑥01③② (Note)
			1NO-1NC	HW1L-A4⑥11③②
			2NO	HW1L-A4⑥20③②
			2NC	HW1L-A4⑥02③②
			2NO-2NC	HW1L-A4⑥22③②

Note: Only full voltage types are available.

Designation Code

Specify a designation code in place of ②, ③, or ⑥ in the Part No.

② Lens/Illumination Color Code			③ Operating Voltage Code		Input Type	⑥ Terminal Style Code
Without Lamp	LED	Incandescent	LED	Incandescent		
A: amber G: green R: red S: blue W: white Y: yellow	A: amber G: green PW: pure white R: red S: blue W: white Y: yellow	A: amber G: green R: red S: blue W: white	Q2: 6V AC/DC	Q5: 6V AC/DC	Full Voltage	F: Finger-safe (IP20) blank: Spring-up screw Only spring-up screw terminals are available on DC-DC converter types.
			Q3: 12V AC/DC	Q6: 12V AC/DC		
			Q4: 24V AC/DC	Q7: 24V AC/DC		
			H2: 100/110V AC	H5: 100/110V AC	Transformer	
			H22: 115/120V AC	H25: 115/120V AC		
			M2: 200/220V AC	M5: 200/220V AC		
			M42: 230/240V AC	M45: 230/240V AC		
			S2: 380V AC	S5: 380V AC		
			T2: 400/440V AC	T5: 400/440V AC		
			T82: 480V AC	T85: 480V AC		
D2: 110V DC	—	DC-DC Converter*				

• Use a pure white LED lamp for yellow illumination.


• Other contact arrangements and gold-plated silver contacts available. See page 219.

*DC-DC converter types are not approved by UL, CSA, and TÜV, and not CE compliant (operating voltage 90 to 140V DC)


HW Series Illuminated Pushbuttons ø22

Dimensions

Full Voltage

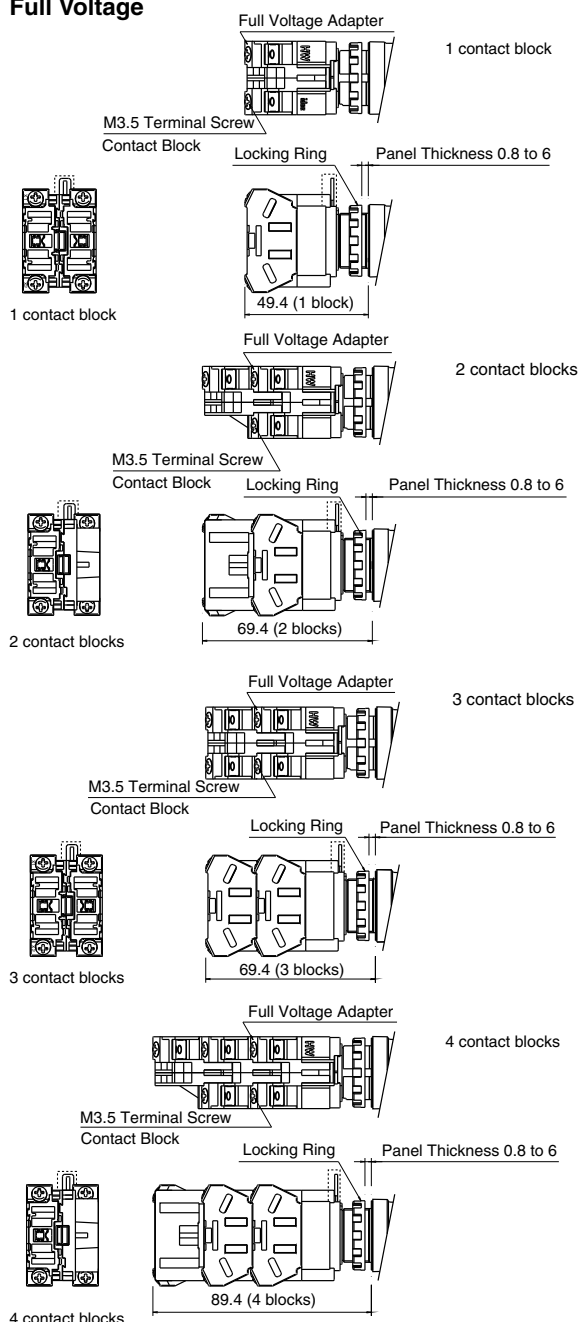


Transformer (240V AC maximum)

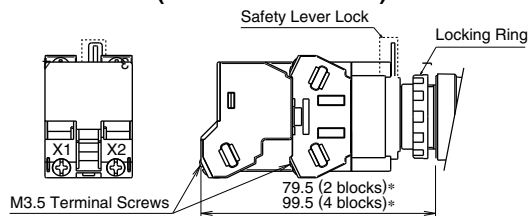


Transformer (380V AC minimum)

DC-DC Converter

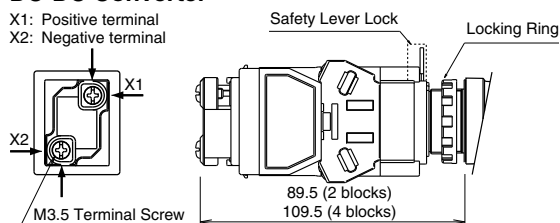


Operator

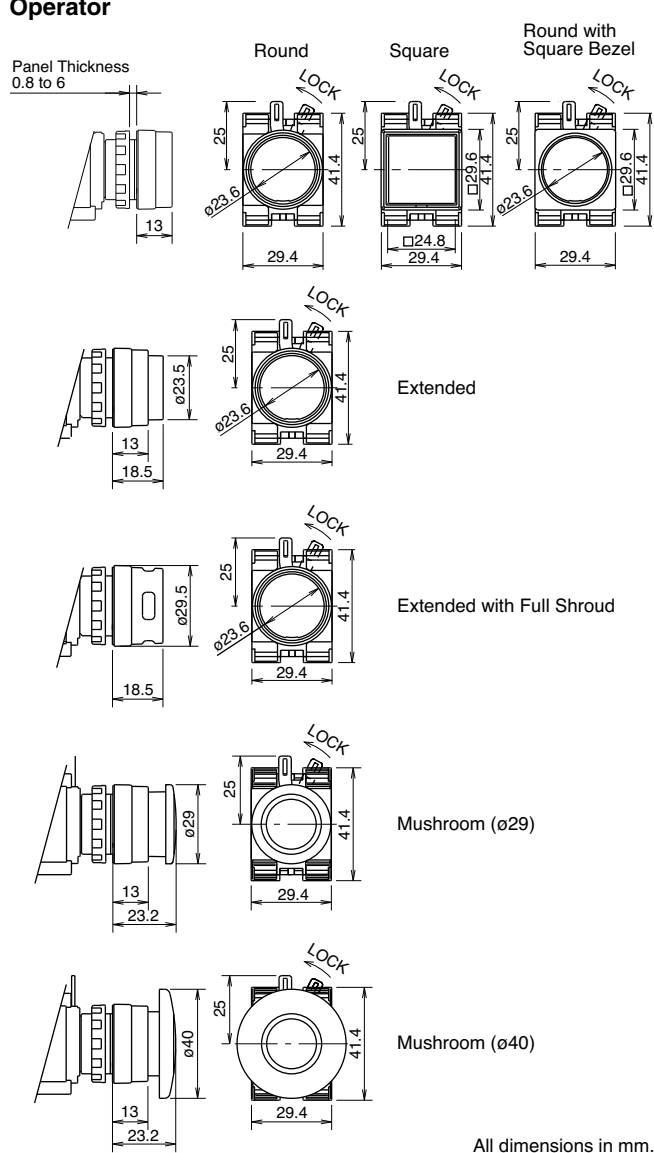

Terminal Wiring

Arrows indicate access directions for wiring.

Spring-up screw terminal

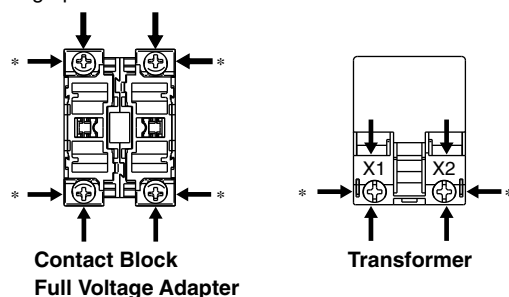

*Spring-up screw terminals only

The above figures illustrate spring-up screw contact blocks.

The depth of each finger-safe (IP20) contact block is 0.9 mm longer than that of a spring-up screw contact block.

*The depths of finger-safe (IP20) contact blocks are as follows:

Transformer Type (240V AC maximum): 89.5 (2 blocks)
109.5 (4 blocks)

Flush
Silhouette

Switches &
Pilot Lights

Display
Lights

LED
Illumination
Units

Display
Units

Safety
Products

Terminal
Blocks

Comm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
Protectors

Power
Supplies

PLCs &
SmartRelay

Operator
Interfaces

Sensors

Control
Stations

Explosion
Protection

References

ø22 HW series Dual Pushbuttons

Dual Pushbuttons

Without Pilot Light

Package Quantity: 1

Operation	Button Style	Contact Arrangement		Part No.	④ Button Color Code	⑤ Legend Code
		Top Button	Bottom Button			
Momentary	Flush (top) Flush (bottom)  	1NO	1NC	HW7D-B11®1001④⑤	GR: Green (top) Red (bottom) WB: White (top) Black (bottom)	Blank: Without legend 1: I/ON (top) O/OFF (bottom)
		1NO	1NO	HW7D-B11®1010④⑤		
		1NO-1NC	1NO-1NC	HW7D-B11®1111④⑤		
		2NO	2NC	HW7D-B11®2002④⑤		
		2NO	2NO	HW7D-B11®2020④⑤		
	Flush (top) Extended (bottom)  	1NO	1NC	HW7D-B12®1001④⑤		
		1NO	1NO	HW7D-B12®1010④⑤		
		1NO-1NC	1NO-1NC	HW7D-B12®1111④⑤		
		2NO	2NC	HW7D-B12®2002④⑤		
		2NO	2NO	HW7D-B12®2020④⑤		
Interlock	Flush (top) Flush (bottom)  	1NO	1NC	HW7D-B21®1001④⑤		
		1NO	1NO	HW7D-B21®1010④⑤		
		1NO-1NC	1NO-1NC	HW7D-B21®1111④⑤		
		2NO	2NC	HW7D-B21®2002④⑤		
		2NO	2NO	HW7D-B21®2020④⑤		
	Flush (top) Extended (bottom)  	1NO	1NC	HW7D-B22®1001④⑤		
		1NO	1NO	HW7D-B22®1010④⑤		
		1NO-1NC	1NO-1NC	HW7D-B22®1111④⑤		
		2NO	2NC	HW7D-B22®2002④⑤		
		2NO	2NO	HW7D-B22®2020④⑤		

• Specify a terminal style code in place of ® in the Part No. F: Finger-safe (IP20), blank: Spring-up screw

Momentary: Two independent momentary switches are contained in one unit.

The contact operates when the button is pressed. When the button is released, the contact goes back to the original position.

Interlock: Momentary operation. When one of the buttons are pressed, the other button cannot be operated.

Do not operate top and bottom buttons at the same time. Operating the buttons at the same time may lead to malfunctions.

Other contact arrangements and gold-plated silver contacts are also available. See page 220.

HW Series Dual Pushbuttons ø22

Dual Pushbuttons

With Pilot Light

Package Quantity: 1

Operation	Lamp	Contact Arrangement		Part No.	④ Button Color Code	⑤ Legend Code
		Top Button	Bottom Button			
Momentary	Without Lamp	1NO	1NC	HW7D-L1①⑥1001Q0W④⑤	GR: Green (top) Red (bottom) WB: White (top) Black (bottom)	Blank: Without legend 1: I/ON (top) O/OFF (bottom)
		1NO	1NO	HW7D-L1①⑥1010Q0W④⑤		
		1NO-1NC	1NO-1NC	HW7D-L1①⑥1111Q0W④⑤		
		2NO	2NC	HW7D-L1①⑥2002Q0W④⑤		
		2NO	2NO	HW7D-L1①⑥2020Q0W④⑤		
	LED	1NO	1NC	HW7D-L1①⑥1001③②④⑤		
		1NO	1NO	HW7D-L1①⑥1010③②④⑤		
		1NO-1NC	1NO-1NC	HW7D-L1①⑥1111③②④⑤		
		2NO	2NC	HW7D-L1①⑥2002③②④⑤		
		2NO	2NO	HW7D-L1①⑥2020③②④⑤		
	Incandescent	1NO	1NC	HW7D-L1①⑥1001③W④⑤		
		1NO	1NO	HW7D-L1①⑥1010③W④⑤		
		1NO-1NC	1NO-1NC	HW7D-L1①⑥1111③W④⑤		
		2NO	2NC	HW7D-L1①⑥2002③W④⑤		
Interlock	Without Lamp	2NO	2NO	HW7D-L1①⑥2020③W④⑤		
		1NO	1NC	HW7D-L2①⑥1001Q0W④⑤		
		1NO	1NO	HW7D-L2①⑥1010Q0W④⑤		
		1NO-1NC	1NO-1NC	HW7D-L2①⑥1111Q0W④⑤		
	LED	2NO	2NC	HW7D-L2①⑥2002Q0W④⑤		
		2NO	2NO	HW7D-L2①⑥2020Q0W④⑤		
		1NO	1NC	HW7D-L2①⑥1001③②④⑤		
		1NO	1NO	HW7D-L2①⑥1010③②④⑤		
		1NO-1NC	1NO-1NC	HW7D-L2①⑥1111③②④⑤		
		2NO	2NC	HW7D-L2①⑥2002③②④⑤		
		2NO	2NO	HW7D-L2①⑥2020③②④⑤		
	Incandescent	1NO	1NC	HW7D-L2①⑥1001③W④⑤		
		1NO	1NO	HW7D-L2①⑥1010③W④⑤		
		1NO-1NC	1NO-1NC	HW7D-L2①⑥1111③W④⑤		
		2NO	2NC	HW7D-L2①⑥2002③W④⑤		
		2NO	2NO	HW7D-L2①⑥2020③W④⑤		

Designation Codes

Specify designation codes ① to ③ in the Part No.

Specify designation codes ① to ③ in the Part No.

① Button Style Code	③ Operating Voltage Code		Input Type	② LED Color Code
	LED	Incandescent		
 1: Flush (top) Flush (bottom) 2: Flush (top) Extended (bottom) 	Q2: 6V AC/DC	Q5: 6V AC/DC	Full Voltage	A: amber G: green PW: pure white R: red S: blue W: white White lens only.
	Q3: 12V AC/DC	Q6: 12V AC/DC		
	Q4: 24V AC/DC	Q7: 24V AC/DC		
	H2: 100/110V AC	H5: 100/110V AC	Transformer	
	H22: 115/120V AC	H25: 115/120V AC		
	M2: 200/220V AC	M5: 200/220V AC		
	M42: 230/240V AC	M45: 230/240V AC		
	S2: 380V AC	S5: 380V AC		
	T2: 400/440V AC	T5: 400/440V AC		
	T82: 480V AC	T85: 480V AC		
	D2: 110V DC	—	DC-DC Converter*	

• White lamp and white lens only for incandescent illumination.

• Other contact arrangements and gold-plated silver contacts available. See page 220.

Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces

Sensors


Control
StationsExplosion
Protection

References


ø22 HW Series Dual Pushbuttons

Dimensions

Without Pilot Light

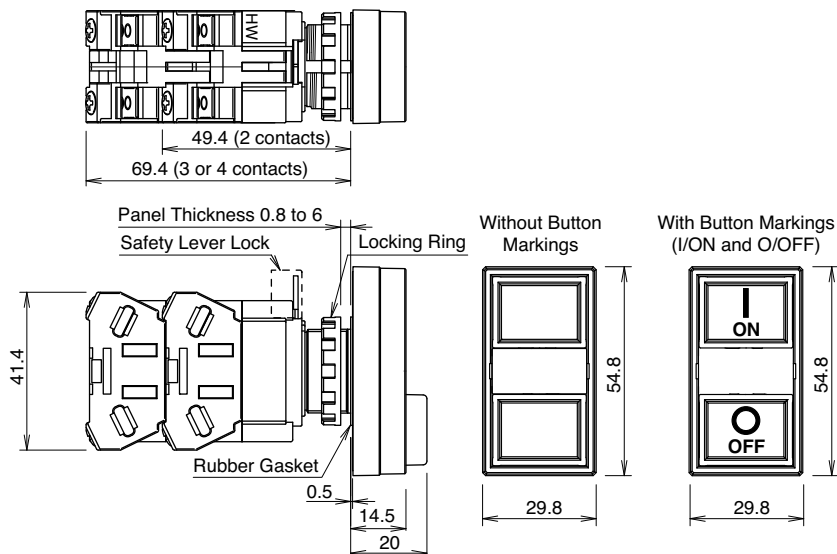


With Pilot Light
Full Voltage

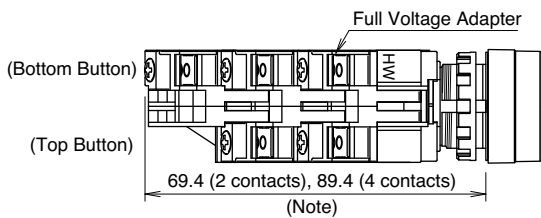


Note: The depth of 3-contact type depends on the combination of contact blocks at top and bottom pushbuttons

Top Button	1 contact block	2 contact blocks
Bottom Button	2 contact blocks	1 contact block
Depth	89.4 mm	69.4 mm

Transformer (240V AC maximum)

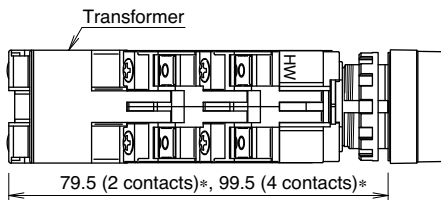

Transformer (380V AC minimum)
DC-DC Converter

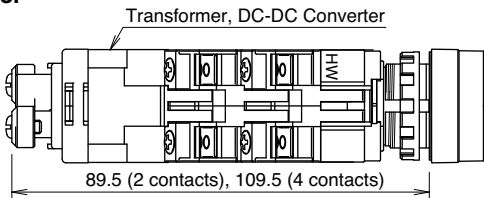

All dimensions in mm.

The above figures illustrate spring-up screw contact blocks.
The depth of each finger-safe (IP20) contact block is 0.9 mm longer than that of a spring-up screw contact block.
*The depths of finger-safe (IP20) types are as follows:
Transformer Type (240V AC maximum): 89.5 (2 blocks)
109.5 (4 blocks)


HW Series Dual Pushbuttons ø22

Contact Arrangement Chart


Contact Arrangement			Contact Block		Top Button		Bottom Button	
Top Button	Bottom Button	Contact Code	Mounting Position	Contact	Normal	Push	Normal	Push
1NO	1NO	1010	1	NO		●		
			2	NO				●
1NO	1NC	1001	1	NO		●		
			2	NC			●	
1NC	1NO	0110	1	NC	●			
			2	NO				●
1NC	1NC	0101	1	NC	●			
			2	NC			●	
1NO	2NO	1020	1	NO		●		
			2	NO				●
			3	Dummy				
			4	NO				●
1NO	1NO-1NC	1011	1	NO		●		
			2	NO				●
			3	Dummy				
			4	NC			●	
1NO	2NC	1002	1	NO		●		
			2	NC			●	
			3	Dummy				
			4	NC			●	
1NC	2NO	0120	1	NC	●			
			2	NO				●
			3	Dummy				
			4	NO				●
1NC	1NO-1NC	0111	1	NC	●			
			2	NO				●
			3	Dummy				
			4	NC			●	
1NC	2NC	0102	1	NC	●			
			2	NC			●	
			3	Dummy				
			4	NC			●	
2NO	1NO	2010	1	NO		●		
			2	NO				●
			3	NO		●		
			4	Dummy				
2NO	1NC	2001	1	NO		●		
			2	NC			●	
			3	NO		●		
			4	Dummy				
1NO-1NC	1NO	1110	1	NO		●		
			2	NO				●
			3	NC	●			
			4	Dummy				
1NO-1NC	1NC	1101	1	NO		●		
			2	NC			●	
			3	NC	●			
			4	Dummy				

- Transformer and DC-DC converter types can have two or four contact blocks only.
- Contact blocks 1 and 3 are actuated by the top button. Contact blocks 2 and 4 are actuated by the bottom button.

Contact Block Mounting Position and Contact Arrangement Chart



Without Pilot Light
With Pilot Light
(transformer)



With Pilot Light
(full voltage)

Contact Block		Top Button		Bottom Button	
		Normal	Push	Normal	Push
1	NO		●		
2	NO				●
3	NC	●			
4	NC			●	

Part No. Development
HW7D - B 12 11 11 GR

└─ Contact code (1NO-1NC) of bottom button
└─ Contact code (1NO-1NC) of top button

Flush
Silhouette

Switches &
Pilot Lights

Display
Lights

LED
Illumination
Units

Display
Units

Safety
Products

Terminal
Blocks

Comm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
Protectors

Power
Supplies

PLCs &
SmartRelay

Operator
Interfaces

Sensors

Control
Stations

Explosion
Protection

References

ø22 HW series Dual Pushbuttons

Contact Arrangement Chart

Contact Arrangement			Contact Block		Top Button		Bottom Button	
Top Button	Bottom Button	Contact Code	Mounting Position	Contact	Normal	Push	Normal	Push
2NC	1NO	0210	1	NC	●			
			2	NO				●
			3	NC	●			
			4	Dummy				
2NC	1NC	0201	1	NC	●			
			2	NC			●	
			3	NC	●			
			4	Dummy				
2NO	2NO	2020	1	NO		●		
			2	NO				●
			3	NO		●		
			4	NO				●
2NO	1NO-1NC	2011	1	NO		●		
			2	NO				●
			3	NO		●		
			4	NC			●	
2NO	2NC	2002	1	NO		●		
			2	NC			●	
			3	NO		●		
			4	NC			●	
1NO-1NC	2NO	1120	1	NO		●		
			2	NO				●
			3	NC	●			
			4	NO				●
1NO-1NC	1NO-1NC	1111	1	NO		●		
			2	NO				●
			3	NC	●			
			4	NC			●	
1NO-1NC	2NC	1102	1	NO		●		
			2	NC			●	
			3	NC	●			
			4	NC			●	
2NC	2NO	0220	1	NC	●			
			2	NO				●
			3	NC	●			
			4	NO				●
2NC	1NO-1NC	0211	1	NC	●			
			2	NO				●
			3	NC	●			
			4	NC			●	
2NC	2NC	0202	1	NC	●			
			2	NC			●	
			3	NC	●			
			4	NC			●	

HW Series Selector Switches ø22

Selector Switches

Package Quantity: 1

No. of Positions	HW1S											Dimensions on page 248.			
	   														
90° 2-position / 60° 2-position	Contact Code	Contact Block		Operator Position			Maintained (90°)	Spring Return from Right (60°)	—		—				
		Mounting Position	Contact	1	2										
	10 (1NO)	1	NO		●		HW1S-2T®10	HW1S-21T®10	—		—				
		2	Dummy												
	11 (1NO-1NC)	1	NO		●		HW1S-2T®11	HW1S-21T®11							
		2	NC	●											
	20 (2NO)	1	NO		●		HW1S-2T®20	HW1S-21T®20							
		2	NO		●										
	22 (2NO-2NC)	1	NO		●		HW1S-2T®22	HW1S-21T®22							
		2	NC	●											
3		NO		●											
4		NC	●												
45° 3-position	Contact Code	Contact Block		Operator Position			Maintained	Spring Return from Right	Spring Return from Left	Spring Return Two-way					
		Mounting Position	Contact	1	0	2									
	20 (2NO)	1	NO	●			HW1S-3T®20	HW1S-31T®20	HW1S-32T®20	HW1S-33T®20					
		2	NO			●									
	02 (2NC)	1	NC			●	HW1S-3T®02	HW1S-31T®02	HW1S-32T®02	HW1S-33T®02					
		2	NC	●											
	22N1 (2NO-2NC)	1	NO	●			HW1S-3T®22N1	HW1S-31T®22N1	HW1S-32T®22N1	HW1S-33T®22N1					
		2	NO			●									
		3	NC			●									
		4	NC	●											
	22N9 (2NO-2NC) ★★	1	NC			●	HW1S-3ST®22N9	—	—	—					
		2	NC	●											
		3	NO			●									
		4	NO	●											
	40 (4NO)	1	NO	●			HW1S-3T®40	HW1S-31T®40	HW1S-32T®40	HW1S-33T®40					
		2	NO			●									
		3	NO	●											
		4	NO			●									
	40N2 (4NO) ★★	1	NO	●			HW1S-3ST®40N2	—	—	—					
		2	NO			●									
		3	NO	●											
		4	NO			●									
	04 (4NC)	1	NC			●	HW1S-3T®04	HW1S-31T®04	HW1S-32T®04	HW1S-33T®04					
		2	NC	●											
		3	NC			●									
		4	NC	●											
	21N1 (2NO-1NC) ★★	1	NO	●			HW1S-3JT®21N1	—	—	—					
		2	NO			●									
		3	NC			●									
		4	Dummy												
30° 5-position / 45° 4-position	Contact Code	Contact Block		Operator Position					Maintained	Maintained	Contact Block Mounting Position				
		Mounting Position	Contact	1	2	3	4	5							
	13N6 (1NO-3NC) ★★	1	NC		●	●	●		HW1S-4T®13N6	—					
		2	NC		●										
		3	NC			●									
		4	NO				●								
	22N3 (2NO-2NC) ★★	1	NO	●					HW1S-4T®22N3	—					
		2	NC		●										
		3	NC			●									
		4	NO				●								
	12 (1NO-2NC) ★★	1	NO	●					HW1S-4T®12	—					
		2	NC		●										
		3	NC			●									
		4	Dummy												
22N3 (2NO-2NC) ★★	1	NO	●					—	HW1S-5T®22N3						
	2	NC		●											
	3	NC				●									
	4	NO					●								





- Specify a terminal style code in place of ® in the Part No. F: Finger-safe (IP20), blank: Spring-up screw
- On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the rated current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- For models with ★, contacts may overlap when the operator position is changed.
- Selector switches with one or three contact blocks contain a dummy block. Knob operator: White indicator on black body
- Other contact arrangements are also available. See pages 249 to 253.

ø22 HW series Key Selector Switches

Key Selector Switches (Pin Tumbler Key)


Package Quantity: 1

Shape	No. of Positions	Contact Code	Contact Block		Operator Position		Cam Code	Maintained	Operator Position		Cam Code	Maintained
			Mounting Position	Contact	1	2		1 2	2 1	2 1		
	90° 2-position	1NC (01)	1	NC	●		—	HW1K-2PA®01		●	J	HW1K-2JPA®01
			2	—	Dummy				Dummy			
		1NO-1NC (11)	1	NO		●	—	HW1K-2PA®11	●		J	HW1K-2JPA®11
			2	NC	●					●		
		2NC (02)	1	NC	●		—	HW1K-2PA®02		●	J	HW1K-2JPA®02
			2	NC	●					●		
		2NO-1NC (21)	1	NO		●	—	HW1K-2PA®21	●		J	HW1K-2JPA®21
			2	NO		●			●			
			3	NC	●					●		
			4	—	Dummy				Dummy			
		1NO-2NC (12)	1	NO		●	—	HW1K-2PA®12	●		J	HW1K-2JPA®12
			2	NC	●					●		
			3	NC	●					●		
			4	—	Dummy				Dummy			
		3NC (03)	1	NC	●		—	HW1K-2PA®03		●	J	HW1K-2JPA®03
			2	NC	●					●		
			3	NC	●					●		
			4	—	Dummy				Dummy			
		2NO-2NC (22)	1	NO		●	—	HW1K-2PA®22	●		J	HW1K-2JPA®22
			2	NC	●					●		
			3	NO		●			●			
			4	NC	●					●		
		4NC (04)	1	NC	●		—	HW1K-2PA®04		●	J	HW1K-2JPA®04
			2	NC	●					●		
			3	NC	●					●		
			4	NC	●					●		



- Specify a terminal style code in place of ® in the Part No.
F: Finger-safe (IP20), blank: Spring-up screw.
- For contact block mounting position, see the figure on the right.
- Each key selector switch is supplied with two keys.
- 15 types of key numbers are available in addition to standard (500) key.
- Spring-return type is also available.
- Key retained position can be selected. See table below for key retained positions.
- See page 248 for dimensions.

Contact Block Mounting Position



Ordering Information

Example: HW1K-2JPA01-501

Not specified: 500 (default key)
501-515: The key number is engraved on the key cylinder. (default key is not engraved with a number)

Cam code: Blank or J

Operator position code:
2: 2-position, maintained
21: 2-position, spring return from right

Key removal/retained positions
A: Removable in all positions
B: Removable in the left only
C: Removable in the right only

Maintained (90° 2-position)		Spring Return (60° 2-position)
		
Cam code: blank	Cam code: J	Cam code: blank

- For more contact arrangement, see pages 249 to 253.

Key Retained Position		
A (removable in all positions) 	B (removable in left only) 	C (removable in right only) 
Cam code: blank		
Key Removal Position		
A (removable in all positions) 	B (removable in left only) 	C (removable in right only) 
Cam code: J		

●●: Key retained position
Note: The key cannot be removed in a spring return position.

HW Series Key Selector Switches ø22

Key Selector Switches (Pin Tumbler Key)

Package Quantity: 1

Shape	No. of Positions	Contact Code	Contact Block		Operator Position			Cam Code	Maintained
			No.	Contact	1	0	2		102
	45° 3-posi- tion	2NC (02)	1	NC				—	HW1K-3PA⑥02
			2	NC					
		2NO-2NC (22N1)	1	NO	●			—	HW1K-3PA⑥22N1
			2	NO			●		
			3	NC					
			4	NC					
		4NC (04)	1	NC				—	HW1K-3PA⑥04
			2	NC					
			3	NC					
			4	NC					
		2NO-1NC (21N1) ☆☆	1	NO	●			J	HW1K-3JPA⑥21N1
			2	NO			●		
			3	NC		●			
			4	—	Dummy				
		2NO-2NC (22N9) ☆☆	1	NC			●	S	HW1K-3SPA⑥22N9
			2	NC	●				
			3	NO					
			4	NO			●		
		4NC (04) ★	1	NC			●	S	HW1K-3SPA⑥04
			2	NC	●				
3	NC				●				
4	NC		●						



- Specify a terminal style code in place of ® in the Part No.
F: Finger-safe (IP20), blank: Spring-up screw
- On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the rated current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- For models with ☆, contacts may overlap when the operator position is changed.
- For contact block mounting position, see the figure on the right.
- Each key selector switch is supplied with two keys.
- 15 types of key numbers are available in addition to standard (500) key.
- Spring-return type is also available.
- Key retained position can be selected. See table below for key retained positions.
- See page 248 for dimensions.

Contact Block Mounting Position



Ordering Information

Example: **HW1K-3SPA04-501**

Not specified: 500 (default key)

501-515: The key number is engraved on the key cylinder. (default key is not engraved with a number)

Cam code: Blank, J, or S

Operator position code:

3: 3-position, maintained

31: 3-position, spring return from right

32: 3-position, spring return from left

33: 3-position, spring return two way

Key removal/retained positions

A: Removable in all positions

B: Removable in the left and center

C: Removable in the right and center

D: Removable in center only

E: Removable in right and left

G: Removable in left only

H: Removable in right only

Note: The key cannot be removed in a spring return position.

Maintained (45° 3-position)	Spring Return (45° 3-position)		
Maintained 1 0 2	Spring Return from Right 1 0 2 (Spring Return from Right)	Spring Return from Left 1 0 2 (Spring Return from Left)	Spring Return Two-way 1 0 2 (Spring Return Two-way)
Cam code: blank, J, or S	Cam code: blank		

Key Retained Position (45° 3-position)			
A (removable in all positions) 1 0 2	B (removable in left and center) 1 0 2	C (removable in right and center) 1 0 2	D (removable in center only) 1 0 2
E (removable in right and left only) 1 0 2	G (removable in left only) 1 0 2	H (removable in right only) 1 0 2	

①②: Key retained position

Note: The key cannot be removed in a spring return position.

- For more contact arrangement, see pages 249 to 253.

ø22 HW series Key Selector Switches

Key Selector Switches (Disc Tumbler Key)

Package Quantity: 1

No. of Positions	Disc Tumbler Key HW1K											
	 											
	Dimensions on page 248.											
Contact Code	Contact Block		Mounting Position		Cam Code	Maintained (90°)	Spring Return from Right (60°)	Mounting Position		Cam Code	Maintained (90°)	
	Mounting Position	Contact	1	2		1 2	1 2	2 1	2 1			
90° 2-position / 60° 2-position	1NO (10)	1	NO		●	—	HW1K-2A®10	HW1K-21B®10	●		J	HW1K-2JA®10
		2	—	Dummy					Dummy			
	1NC (01)	1	NC	●		—	HW1K-2A®01	HW1K-21B®01		●	J	HW1K-2JA®01
		2	—	Dummy					Dummy			
	1NO-1NC (11)	1	NO		●	—	HW1K-2A®11	HW1K-21B®11	●		J	HW1K-2JA®11
		2	NC	●						●		
	2NO (20)	1	NO		●	—	HW1K-2A®20	HW1K-21B®20	●		J	HW1K-2JA®20
		2	NO		●				●			
	2NC (02)	1	NC	●		—	HW1K-2A®02	HW1K-21B®02		●	J	HW1K-2JA®02
		2	NC	●						●		
	2NO-1NC (21)	1	NO		●	—	HW1K-2A®21	HW1K-21B®21	●		J	HW1K-2JA®21
		2	NO		●				●			
		3	NC	●						●		
		4	—	Dummy					Dummy			
	1NO-2NC (12)	1	NO		●	—	HW1K-2A®12	HW1K-21B®12	●		J	HW1K-2JA®12
		2	NC	●						●		
		3	NC	●						●		
		4	—	Dummy					Dummy			
	3NC (03)	1	NC	●		—	HW1K-2A®03	HW1K-21B®03		●	J	HW1K-2JA®03
		2	NC	●						●		
		3	NC	●						●		
		4	—	Dummy					Dummy			
	2NO-2NC (22)	1	NO		●	—	HW1K-2A®22	HW1K-21B®22	●		J	HW1K-2JA®22
		2	NC	●						●		
		3	NO		●				●			
		4	NC	●						●		
	4NC (04)	1	NC	●		—	HW1K-2A®04	HW1K-21B®04		●	J	HW1K-2JA®04
2		NC	●						●			
3		NC	●						●			
4		NC	●						●			

- Specify a terminal style code in place of ® in the Part No.
- F: Finger-safe (IP20), blank: Spring-up screw
- Each key selector switch is supplied with two keys.
- 3 types of key numbers are available in addition to standard key.
- Key retained position can be selected. See table below for key retained positions.

Ordering Information

Example: HW1K-2JA01-1H

Not specified 0H: The key number is engraved on the key cylinder. (default key is not engraved with a number)

1H

2H

3H

Cam code: Blank or J

Operator position code:

2: 2-position, maintained

21: 2-position, spring return from right

Maintained (90° 2-position)		Spring Return (60° 2-position)
1 2	2 1	1 2
Cam code: blank	Cam code: J	Spring Return from Right Cam code: blank

- For more contact arrangement, see pages 249 to 253.

Contact Block Mounting Position



- Key removal/retained positions
- A: Removable in all positions
 - B: Removable in the left only
 - C: Removable in the right only

Key Retained Position		
A (removable in all positions) 1 2	B (removable in left only) 1 2	C (removable in right only) 1 2
Cam code: blank		

Key Removal Position		
A (removable in all positions) 2 1	B (removable in left only) 2 1	C (removable in right only) 2 1
Cam code: J		

①②: Key retained position

Note: The key cannot be removed in a spring return position.

HW Series Key Selector Switches ø22

Key Selector Switches (Disc Tumbler Key)

Package Quantity: 1

Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces

Sensors

Control
StationsExplosion
Protection

References

No. of Positions	Disc Tumbler Key HW1K						Dimensions on page 248.							
	Contact Code	Contact Block					Mounting Position		Cam Code	Maintained	Spring return from right	Spring Return from Left	Spring Return Two-way	
		Mounting Position					Contact	1		0	2			
45° 3-position	2NO (20)	1	NO	●			—	HW1K-3AⒺ20	HW1K-31BⒺ20	HW1K-32CⒺ20	HW1K-33DⒺ20			
		2	NO			●	—	HW1K-3AⒺ02	HW1K-31BⒺ02	HW1K-32CⒺ02	HW1K-33DⒺ02			
	2NC (02)	1	NC				—	HW1K-3AⒺ02	HW1K-31BⒺ02	HW1K-32CⒺ02	HW1K-33DⒺ02			
		2	NC	■										
	2NO-2NC (22N1)	1	NO	●			—	HW1K-3AⒺ22N1	HW1K-31BⒺ22N1	HW1K-32CⒺ22N1	HW1K-33DⒺ22N1			
		2	NO			●								
		3	NC		■									
		4	NC	■										
	2NO-2NC (22N9)	1	NC			●	S	HW1K-3SAⒺ22N9	—	—	—			
		2	NC	●										
		3	NO	■										
	★☆☆	4	NO			●								
	4NO (40)	1	NO	●			—	HW1K-3AⒺ40	HW1K-31BⒺ40	HW1K-32CⒺ40	HW1K-33DⒺ40			
		2	NO			●								
		3	NO	●										
		4	NO			●								
	4NO (40N2)	1	NO	●			S	HW1K-3SAⒺ40N2	—	—	—			
		2	NO		■									
		3	NO	●										
	★☆☆	4	NO			●								
	4NO (04)	1	NC		■		—	HW1K-3AⒺ04	HW1K-31BⒺ04	HW1K-32CⒺ04	HW1K-33DⒺ04			
		2	NC	■										
		3	NC		■									
		4	NC	■										
	4NC (04)	1	NC			●	S	HW1K-3SAⒺ04	—	—	—			
		2	NC	●										
		3	NC			●								
	★	4	NC	●										
	2NO-2NC (21N1)	1	NO	●			J	HW1K-3JAⒺ21N1	—	—	—			
		2	NO			●								
	3	NC		●										
★☆☆	4	—		Dummy										

- Specify a terminal style code in place of ® in the Part No. F: Finger-safe (IP20), blank: Spring-up screw
- On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the rated current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- For models with ☆, contacts may overlap when the operator position is changed.
- 3 types of key numbers are available in addition to standard key.
- Key retained position can be selected. See table below for key retained positions.

Ordering Information

Example: HW1K-3SA04-1H

Not specified 0H: The key number is engraved on the key cylinder. (default key is not engraved with a number)

1H
2H
3H

Cam code: Blank or J

Operator position code:
3: 3-position, maintained
31: 3-position, spring return from right
32: 3-position, spring return from left
33: 3-position, spring return two way

Key removal/retained positions

- A: Removable in all positions
- B: Removable in the left and center
- C: Removable in the right and center
- D: Removable in center only
- E: Removable in right and left
- G: Removable in left only
- H: Removable in right only

Note: The key cannot be removed in a spring return position.

Contact Block Mounting Position



Maintained (45° 3-position)	Spring Return (45° 3-position)		
Maintained 1 0 2	Spring Return from Right 1 0 2 (Spring Return from Right)	Spring Return from Left 1 0 2 (Spring Return from Left)	Spring Return Two-way 1 0 2 (Spring Return Two-way)
Cam code: blank, J, or S	Cam code: blank		

Key Retained Position (45° 3-position)			
A (removable in all positions) 1 0 2	B (removable in left and center) 1 0 2	C (removable in right and center) 1 0 2	D (removable in center only) 1 0 2
E (removable in right and left only) 1 0 2	G (removable in left only) 1 0 2	H (removable in right only) 1 0 2	

000: Key retained position

Note: The key cannot be removed in a spring return position.

For more contact arrangement, see pages 249 to 253.

HW Series Illuminated Selector Switches ø22

Illuminated Selector Switches (45° 3-position)

Package Quantity: 1

Contact Code	Contact Block		Operator Position			Lamp	Maintained	Spring Return from Right	Spring Return from Left	Spring Return Two-way
	Mounting Position	Contact	1	0	2					
20 (2NO)	1	NO	●			Without Lamp	HW1F-3⑥20Q0②	HW1F-31⑥20Q0②	HW1F-32⑥20Q0②	HW1F-33⑥20Q0②
	2	NO			●	LED / Incandescent	HW1F-3⑥20③②	HW1F-31⑥20③②	HW1F-32⑥20③②	HW1F-33⑥20③②
02 (2NC)	1	NC		■		Without Lamp	HW1F-3⑥02Q0②	HW1F-31⑥02Q0②	HW1F-32⑥02Q0②	HW1F-33⑥02Q0②
	2	NC		■		LED / Incandescent	HW1F-3⑥02③②	HW1F-31⑥02③②	HW1F-32⑥02③②	HW1F-33⑥02③②
22N1 (2NO-2NC)	1	NO	●			Without Lamp	HW1F-3⑥22N1Q0②	HW1F-31⑥22N1Q0②	HW1F-32⑥22N1Q0②	HW1F-33⑥22N1Q0②
	2	NO			●	LED / Incandescent	HW1F-3⑥22N1③②	HW1F-31⑥22N1③②	HW1F-32⑥22N1③②	HW1F-33⑥22N1③②
	3	NC		■						
	4	NC		■						
40 (4NO)	1	NO	●			Without Lamp	HW1F-3⑥40Q0②	HW1F-31⑥40Q0②	HW1F-32⑥40Q0②	HW1F-33⑥40Q0②
	2	NO			●	LED / Incandescent	HW1F-3⑥40③②	HW1F-31⑥40③②	HW1F-32⑥40③②	HW1F-33⑥40③②
	3	NO	●							
	4	NO			●					
04 (4NC)	1	NC		■		Without Lamp	HW1F-3⑥04Q0②	HW1F-31⑥04Q0②	HW1F-32⑥04Q0②	HW1F-33⑥04Q0②
	2	NC		■		LED / Incandescent	HW1F-3⑥04③②	HW1F-31⑥04③②	HW1F-32⑥04③②	HW1F-33⑥04③②
	3	NC		■						
	4	NC		■						

Designation Code

Specify a designation code in place of ②, ③, or ⑥ in the Part No.

② Lens/Illumination Color Code		③ Operating Voltage Code		Input Type	⑥ Terminal Style Code
Without Lamp / LED	Incandescent	LED	Incandescent		
A: amber G: green PW: pure white R: red S: blue W: white Y: yellow	A: amber G: green R: red S: blue W: white	Q2 : 6V AC/DC	Q5 : 6V AC/DC	Full Voltage	F: Finger-safe (IP20) blank: Spring-up screw
		Q3 : 12V AC/DC	Q6 : 12V AC/DC		
		Q4 : 24V AC/DC	Q7 : 24V AC/DC		
		H2 : 100/110V AC	H5 : 100/110V AC	Transformer	Only spring-up screw terminals are available on DC-DC converter types.
		H22 : 115/120V AC	H25 : 115/120V AC		
		M2 : 200/220V AC	M5 : 200/220V AC		
		M42 : 230/240V AC	M45 : 230/240V AC		
		S2 : 380V AC	S5 : 380V AC		
		T2 : 400/440V AC	T5 : 400/440V AC		
		T82 : 480V AC	T85 : 480V AC		

• Use a pure white LED lamp for yellow illumination.

• Other contact arrangements and gold-plated silver contacts available. See page 221.

*DC-DC converter types are not approved by UL, CSA, and TÜV, and not CE compliant (operating voltage 90 to 140V DC)


Lever Operator

Lever operators available.

To order lever operators, specify "L" in the Part No. as shown below.

 Example: HW1F-211Q7② → HW1F-2L11Q7②
 (knob operator) (lever operator)


Contact Block Mounting Position

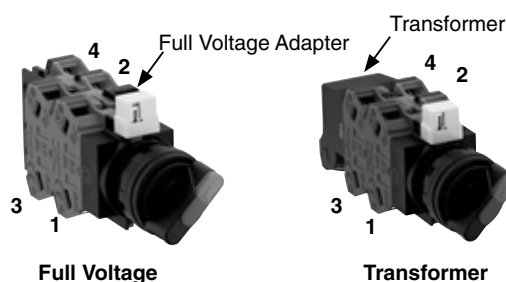


ø22 HW Series Selector Switches

Dimensions


Selector Switch (Knob Operator)

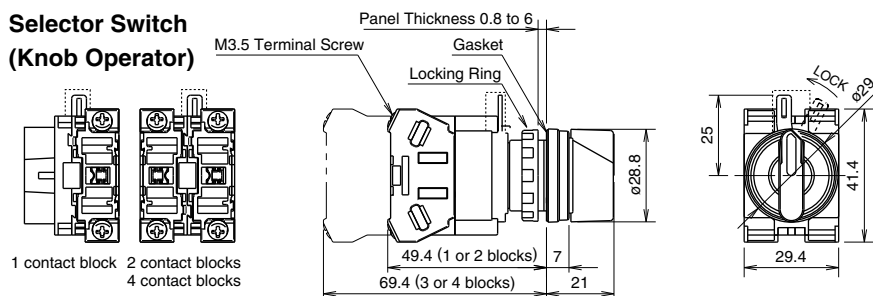

Key Selector Switch (disc tumbler key)

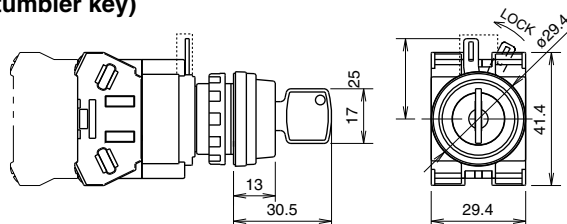


Key Selector Switch (pin tumbler key)

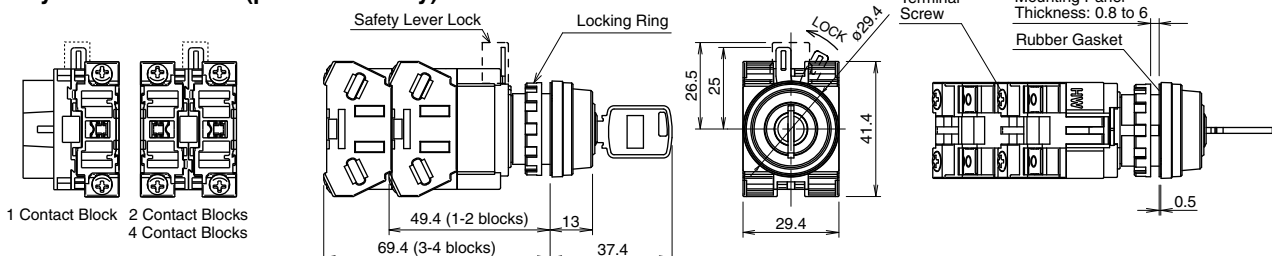


Illuminated Selector Switch (Full Voltage)


M3.5 Terminal Screw (Knob Operator)

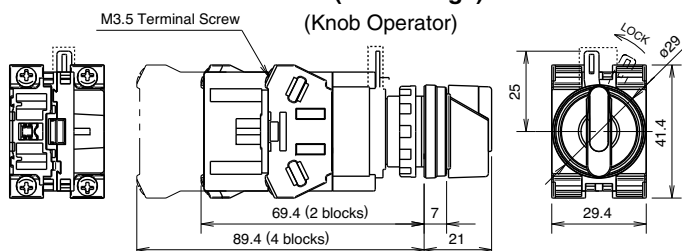

M3.5
Terminal Screw (Lever Operator)

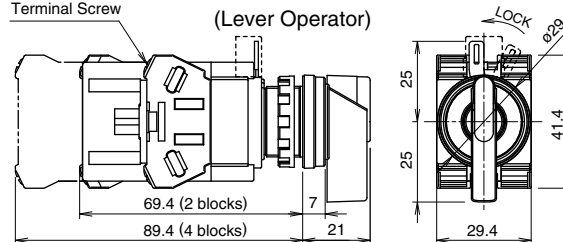

Illuminated Selector Switch (Transformer 240V AC maximum)

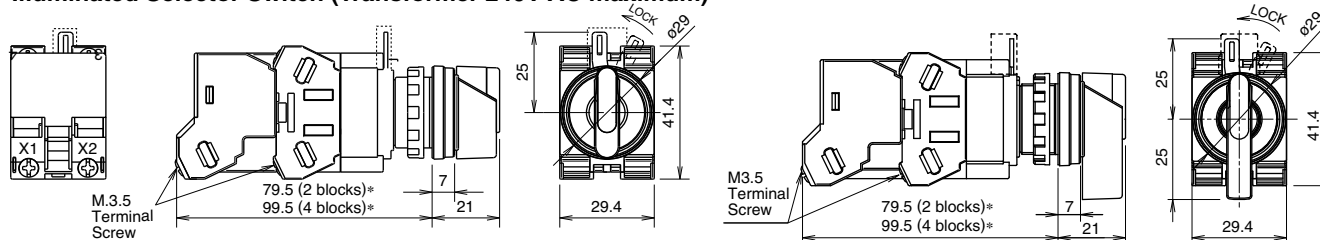

The above figures illustrate spring-up screw contact blocks.

The depth of each finger-safe (IP20) contact block is 0.9 mm longer than that of a spring-up screw contact block.

*The depth of finger-safe (IP20) contact blocks are as follows:

Transformer : 89.5 (2 blocks)
109.5 (4 blocks)


For dimensions of transformer types (380V AC minimum), see page 235.

All dimensions in mm.


Terminal Wiring

Arrows indicate access directions for wiring.

Spring-up screw terminal



Contact Block Full Voltage Adapter



Transformer

*Spring-up screw terminals only.

HW series Selector Switch Contact Arrangement Charts ø22

90° 2-position (Maintained) / 60° 2-position (Spring Return)

Contact Code	Contact Block		Operator Position		Operator Availability						Cam Code	Remarks
												
	Mounting Position	Contact	1	2	Knob	Key	Illuminated	Knob	Key	Illuminated		
10 (1NO)	1	NO		●	x	x	x	x	x	x	—	Standard
	2	Dummy										
01 (1NC)	1	NC	●		x	x	x	x	—	x	—	
	2	Dummy										
11 (1NO-1NC)	1	NO		●	x	x	x	x	x	x	—	Standard
	2	NC	●									
11N1 (2NO-2NC)	1	NC	●		x	x	x	x	—	x	—	
	2	NO		●								
20 (2NO)	1	NO		●	x	x	x	x	x	x	—	Standard
	2	NO		●								
02 (2NC)	1	NC	●		x	x	x	x	—	x	—	
	2	NC	●									
22 (2NO-2NC)	1	NO		●	x	x	x	x	—	x	—	Standard
	2	NC	●									
	3	NO		●								
	4	NC	●									
22N2 (2NO-2NC)	1	NC	●		x	x	x	x	—	x	—	
	2	NO		●								
	3	NC	●									
	4	NO		●								
22N1 (2NO-2NC)	1	NO		●	x	x	x	x	—	x	—	
	2	NO		●								
	3	NC	●									
	4	NC	●									
22N4 (2NO-2NC)	1	NC	●		x	x	x	x	—	x	—	
	2	NO		●								
	3	NO		●								
	4	NC	●									
31N1 (3NO-1NC)	1	NC	●		x	x	x	x	—	x	—	
	2	NO		●								
	3	NO		●								
	4	NO		●								
40 (4NO)	1	NO		●	x	x	x	x	—	x	—	
	2	NO		●								
	3	NO		●								
	4	NO		●								
7S ★ (1NO-1NC)	1	NO		●	x	x	x	x	—	x	—	
	2	NC	●									
8S ★ (2NO-2NC)	1	NO		●	x	x	x	x	—	x	—	
	2	NC	●									
	3	NO		●								
	4	NC	●									
22N7 ★ (2NO-2NC)	1	NC	●		x	x	x	x	—	x	—	
	2	NO		●								
	3	NC	●									
	4	NO		●								
03 (3NO)	1	NC	●		x	x	x	x	x	x	—	
	2	NC	●									
	3	NC	●									
	4	Dummy										
21 (2NO-2NC)	1	NO		●	x	x	x	x	x	x	—	
	2	NC	●									
	3	NO		●								
	4	Dummy										
12 (1NO-2NC)	1	NO		●	x	x	x	x	x	x	—	
	2	NC	●									
	3	NC	●									
	4	Dummy										

- On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the rated current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.

Remarks: When ordering the contact arrangement indicated with "Standard" in the table above, specify the Part No. shown in the standard Part No. on preceding pages. For other contact arrangements, see Part No. Development on page 253.

Flush Silhouette

Switches & Pilot Lights

Display Lights

LED Illumination Units

Display Units

Safety Products

Terminal Blocks

Comm. Terminals

AS-Interface

Relays & Timers

Sockets

Circuit Protectors

Power Supplies

PLCs & SmartRelay

Operator Interfaces

Sensors

Control Stations

Explosion Protection

References

ø22 HW series Selector Switch Contact Arrangement Charts

90° 2-position (Cam Reversed)

Contact Code	Contact Block		Operator Position		Operator Availability			Cam Code	Remarks
									
	Mounting Position	Contact	2	1	Knob	Key	Illuminated		
10 (1NO)	1	NO	●		○	○	○	J	Standard
	2	Dummy							
01 (1NO)	1	NC		●	○	○	○	J	
	2	Dummy							
11 (1NO-1NC)	1	NO	●		○	○	○	J	Standard
	2	NC		●					
11N1 (1NO-1NC)	1	NC		●	○	○	○	J	0
	2	NO	●						
20 (2NO)	1	NO	●		○	○	○	J	Standard
	2	NO	●						
02 (2NC)	1	NC		●	○	○	○	J	0
	2	NC		●					
22 (2NO-2NC)	1	NO	●		○	○	○	J	Standard
	2	NC		●					
	3	NO	●						
	4	NC		●					
22N2 (2NO-2NC)	1	NC		●	○	○	○	J	
	2	NO	●						
	3	NC		●					
	4	NO	●						
22N1 (2NO-2NC)	1	NO	●		○	○	○	J	
	2	NO	●						
	3	NC		●					
	4	NC		●					
22N4 (2NO-2NC)	1	NC		●	○	○	○	J	
	2	NO	●						
	3	NO	●						
	4	NC		●					
31N1 (3NO-1NC)	1	NC		●	○	○	○	J	
	2	NO	●						
	3	NO	●						
	4	NO	●						
40 (4NO)	1	NO	●		○	○	○	J	
	2	NO	●						
	3	NO	●						
	4	NO	●						
7S ★ (1NO-1NC)	1	NO			○	○	○	J	
	2	NC							
8S ★ (2NO-2NC)	1	NO			○	○	○	J	
	2	NC							
	3	NO							
	4	NC							
22N7 ★ (2NO-2NC)	1	NC			○	○	○	J	
	2	NO							
	3	NC							
	4	NO							
03 (3NC)	1	NC		●	○	○	○	J	
	2	NC		●					
	3	NC		●					
	4	Dummy							
21 (2NO-1NC)	1	NO	●		○	○	○	J	
	2	NC		●					
	3	NO	●						
	4	Dummy							
12 (1NO-2NC)	1	NO	●		○	○	○	J	
	2	NC		●					
	3	NC		●					
	4	Dummy							

• On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the rated current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.

Remarks: When ordering the contact arrangement indicated with "Standard" in the table above, specify the Part No. shown in the standard Part No. on preceding pages. For other contact arrangements, see Part No. Development on page 253.

HW Series Selector Switch Contact Arrangement Charts ø22

45° 3-position

Contact Code	Contact Block		Operator Position			Operator Availability												Cam Code	Remarks	
																				
	1	0				2	Knob	Key	Illuminated	Knob	Key	Illuminated	Knob	Key	Illuminated	Knob	Key			Illuminated
11 (1NO-1NC)	1	NO				x	x	x	x	x	x	x	x	x	x	x	x	—		
	2	NC																		
11N1 (1NO-1NC)	1	NC				x	x	x	x	x	x	x	x	x	x	x	x	—		
	2	NO																		
7S ★☆ (1NO-1NC)	1	$\overline{\text{NO}}$				x	x	x	—	—	—	—	—	—	—	—	—	J		
	2	$\overline{\text{NC}}$																		
11N1 ★☆☆ (1NO-1NC)	1	NC				x	x	x	—	—	—	—	—	—	—	—	—	J		
	2	NO																		
20 (2NO)	1	NO				x	x	x	x	x	x	x	x	x	x	x	x	—	Standard	
	2	NO																		
1S (2NO)	1	$\overline{\text{NO}}$				x	x	x	—	—	—	—	—	—	—	—	—	J		
	2	NO																		
2S ★ (2NO)	1	NO				x	x	x	—	—	—	—	—	—	—	—	—	J		
	2	NC																		
02 (2NC)	3	NC				x	x	x	x	x	x	x	x	x	x	x	x	—	Standard	
	4	NC																		
22N1 (2NO-2NC)	1	NO				x	x	x	x	x	x	x	x	x	x	x	x	—	Standard	
	2	NO																		
	3	NC																		
	4	NC																		
22N2 (2NO-2NC)	1	NC				x	x	x	x	x	x	x	x	x	x	x	x	—		
	2	NO																		
	3	NC																		
	4	NO																		
8S ★☆ (2NO-2NC)	1	$\overline{\text{NO}}$				x	x	x	—	—	—	—	—	—	—	—	—	J		
	2	$\overline{\text{NC}}$																		
	3	$\overline{\text{NO}}$																		
	4	$\overline{\text{NC}}$																		
22N8 ★☆☆ (2NO-2NC)	1	$\overline{\text{NO}}$				x	x	x	—	—	—	—	—	—	—	—	—	J		
	2	NC																		
	3	NC																		
	4	NO																		
22N2 ★☆☆ (2NO-2NC)	1	NC				x	x	x	—	—	—	—	—	—	—	—	—	J		
	2	NO																		
	3	NC																		
	4	NO																		
31 (3NO-1NC)	1	NO				x	x	x	x	x	x	x	x	x	x	x	x	—		
	2	NC																		
	3	NO																		
	4	NO																		
31N1 (3NO-1NC)	1	NC				x	x	x	x	x	x	x	x	x	x	x	x	—		
	2	NO																		
	3	NO																		
	4	NO																		
13 (1NO-3NC)	1	NO				x	x	x	x	x	x	x	x	x	x	x	x	—		
	2	NC																		
	3	NC																		
	4	NC																		
13N3 ★☆☆ (1NO-3NC)	1	NC				x	x	x	—	—	—	—	—	—	—	—	—	J		
	2	NO																		
	3	NC																		
	4	NC																		

• On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the rated current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.

• For models with ☆, contacts may overlap when the operator position is changed.

Remarks: When ordering the contact arrangement indicated with "Standard" in the table above, specify the Part No. shown in the standard Part No. on preceding pages. For other contact arrangements, see Part No. Development on page 253.

Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces

Sensors

Control
StationsExplosion
Protection

References

ø22 HW series Selector Switch Contact Arrangement Charts

45° 3-position

Contact Code	Contact Block		Operator Position			Operator Availability												Cam Code	Remarks
																			
	Mounting Position	Contact	1	0	2	Knob	Key	Illuminated	Knob	Key	Illuminated	Knob	Key	Illuminated	Knob	Key	Illuminated		
40 (4NO)	1	NO	●															—	Standard
	2	NO			●														
	3	NO	●			×	×	×	×	×	×	×	×	×	×	×	×		
	4	NO			●														
40N1 ★ (4NO)	1	NO	●		●													J	
	2	NO			●														
	3	NO	●		●	×	×	×	—	—	—	—	—	—	—	—	—		
	4	NO			●														
04 (4NC)	1	NC		■														—	Standard
	2	NC	■																
	3	NC		■		×	×	×	×	×	×	×	×	×	×	×	×		
	4	NC	■																
04N2 ★ (4NC)	1	NC		●														J	
	2	NC	■			×	×	×	—	—	—	—	—	—	—	—	—		
	3	NC		●															
	4	NC	■																
22 ★☆ (2NO-2NC)	1	NO	●															J	
	2	NC		●		×	×	×	—	—	—	—	—	—	—	—	—		
	3	NO	●																
	4	NC		●															
21N1 ★☆ (2NO-1NC)	1	NO	●															S	Standard
	2	NO			●	×	×	×	—	—	—	—	—	—	—	—	—		
	3	NC		●															
	4	Dummy																	
40N2 ★☆ (4NO)	1	NO	●		■													S	Standard
	2	NO		■		×	×	×	—	—	—	—	—	—	—	—	—		
	3	NO	●																
	4	NO			●														
22N9 ★☆ (2NO-2NC)	1	NC			●													J	Standard
	2	NC	●			×	×	×	—	—	—	—	—	—	—	—	—		
	3	NO	■																
	4	NO			●														
31N4 ★☆ (3NO-1NC)	1	NO	●															J	
	2	NC	■			×	×	×	—	—	—	—	—	—	—	—	—		
	3	NO	●		●														
	4	NO			●														
13N1 ★☆ (1NO-3NC)	1	NO	●															J	
	2	NC	■			×	×	×	—	—	—	—	—	—	—	—	—		
	3	NC		●															
	4	NC	■																
22N5 ★☆ (2NO-2NC)	1	NC		■														J	
	2	NO			●	×	×	×	—	—	—	—	—	—	—	—	—		
	3	NC		●															
	4	NO			●														
31N2 ★☆ (3NO-1NC)	1	NO	●															J	
	2	NO			●	×	×	×	—	—	—	—	—	—	—	—	—		
	3	NC		●															
	4	NO			●														
13N2 ★☆ (1NO-3NC)	1	NC		■														J	
	2	NC	■			×	×	×	—	—	—	—	—	—	—	—	—		
	3	NC		●															
	4	NO			●														

• On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the rated current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.

• For models with ☆, contacts may overlap when the operator position is changed.

Remarks: When ordering the contact arrangement indicated with "Standard" in the table above, specify the Part No. shown in the standard Part No. on preceding pages. For other contact arrangements, see Part No. Development on page 253.

HW Series Selector Switch Contact Arrangement Charts ø22

45° 4-position

Contact Code	Contact Block		Operator Position				Operator Availability	Cam Code	Remarks
	Mounting Position	Contact	1	2	3	4	Knob		
12 ★☆ (1NO-2NC)	1	NO	●				×	—	Standard
	2	NC		●					
	3	NC			●				
	4	Dummy							
04N3 ★☆ (4NC)	1	NC					×	—	
	2	NC		●					
	3	NC			●				
	4	NC				●			
13N6 ★☆ (1NO-3NC)	1	NC					×	—	Standard
	2	NC		●					
	3	NC			●				
	4	NO				●			
13N5 ★☆ (1NO-3NC)	1	NO	●				×	—	
	2	NC		●					
	3	NC			●				
	4	NC				●			
22N3 ★☆ (2NO-2NC)	1	NO	●				×	—	Standard
	2	NC		●					
	3	NC			●				
	4	NO				●			

30° 5-position


Contact Code	Contact Block		Operator Position					Operator Availability	Cam Code	Remarks
	Mounting Position	Contact	1	2	3	4	5	Knob		
22N3 ★☆ (2NO-2NC)	1	NO	●					×	—	Standard
	2	NC		●						
	3	NC				●				
	4	NO					●			

- On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the rated current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- For models with ☆, contacts may overlap when the operator position is changed.

Contact Block Mounting Position and Contact Arrangement Chart



Non-illuminated Selector
Illuminated Selector
(Transformer)



Illuminated Selector
(Full Voltage)



Illuminated Selector
(Transformer)

Part No. Development

When cam code is not required

HW1S - 2 T F 11

— Contact code (1NO-1NC)
— "T" for knob operator
— 2-position

When cam code is required

HW1K - 3 J A F 22N2

— Contact code (2NO-2NC)
— Key removal option code
— Cam code (J, S, or none)
— 3-position

Flush Silhouette
Switches & Pilot Lights
Display Lights
LED Illumination Units
Display Units
Safety Products
Terminal Blocks
Comm. Terminals
AS-Interface
Relays & Timers
Sockets
Circuit Protectors
Power Supplies
PLCs & SmartRelay
Operator Interfaces
Sensors
Control Stations
Explosion Protection
References

ø22 HW series Pushbutton Selectors


Pushbutton Selectors

Package Quantity: 1

Shape	Circuit Category	Contact Code	Contact Block						Part No.	① Button Color Code
			Mounting Position	Contact	Normal	Depressed	Normal	Depressed		
    	A	11 (1NO-1NC)	1	NO		●		●	HW1R-2A⑥11①	Specify a button color code in place of ① in the Part No. B: black G: green R: red S: blue W: white Y: yellow
			2	NC	●					
		20 (2NO)	1	NO		●		●	HW1R-2A⑥20①	
			2	NO		●	■			
		22 (2NO-2NC)	1	NO		●		●	HW1R-2A⑥22①	
			2	NC	●					
			3	NO		●		●		
			4	NC	●					
	D	20 (2NO)	1	NO		●		●	HW1R-2D⑥20①	
			2	NO						
		22N1 (2NO-2NC)	1	NO		●		●	HW1R-2D⑥22N1①	
			2	NO			■			
			3	NC	●		■			
			4	NC	■		●			
	E	22N1 ★ (2NO-2NC)	1	NO		●			HW1R-2E⑥22N1①	
			2	NO				●		
			3	NC			■	■		
			4	NC	■					
	F	22N1 ★ (2NO-2NC)	1	NO				●	HW1R-2F⑥22N1①	
			2	NO		●				
			3	NC			●			
			4	NC	●					
	N	22N2 ★ (2NO-2NC)	1	NC			●		HW1R-2N⑥22N2①	
			2	NO		●		●		
3			NC			●				
4			NO		●		●			
T	22N1 ★ (2NO-2NC)	1	NO		●	●	Blocked	HW1R-2T⑥22N1①		
		2	NO		●	●				
		3	NC	●						
		4	NC	●						

- On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the rated current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- Specify a terminal style code in place of ⑥ in the Part No. F: Finger-safe (IP20), blank: Spring-up screw
- When operating the pushbutton selector, do not turn the operator ring or the lock lever while the button is depressed. Otherwise the push-button selector may be damaged.
- Other contact arrangements are also available upon request.


Dimensions

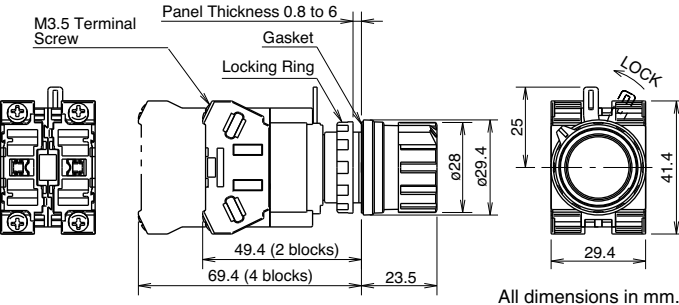

The above figure illustrates spring-up screw contact blocks.

The depth of each finger-safe (IP20) contact block is 0.9 mm longer than that of a spring-up screw contact block.

Contact Block Mounting Position and Contact Arrangement Chart

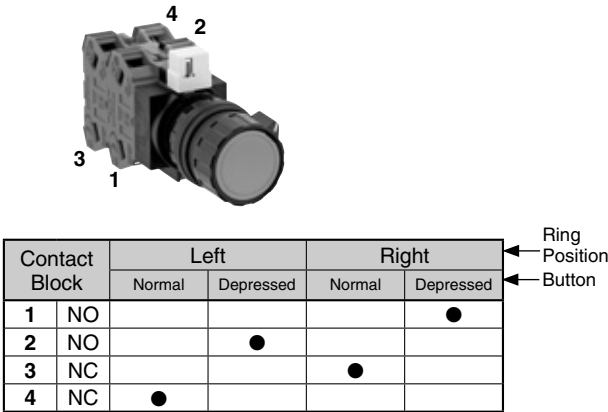

HW Series Mono-Lever Switches ø22

Mono-Lever Switches

Package Quantity: 1

Shape	Positions	Part No.
HW1M Standard Lever  	2-position	HW1M-1010-⑥20
		HW1M-2020-⑥20
		HW1M-0101-⑥20
		HW1M-0202-⑥20
		HW1M-0101-⑥40
	4-position	HW1M-0202-⑥40
		HW1M-1111-⑥22N9
HW1M-L Interlocking Lever  	2-position	HW1M-2222-⑥22N9
		HW1M-L1010-⑥20
		HW1M-L2020-⑥20
		HW1M-L0101-⑥20
		HW1M-L0202-⑥20
	4-position	HW1M-L0101-⑥40
		HW1M-L0202-⑥40
	4-position	HW1M-L1111-⑥22N9
		HW1M-L2222-⑥22N9

- On all mono-lever switches, the rated current (load switching current) is reduced to a half of the rated current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- Specify a terminal style code in place of ⑥ in the Part No. F: Finger-safe (IP20), blank: Spring-up screw

Contact Arrangement Chart

2-position (Right/Left)

Contact Code	Contact Block		Lever Operator Position		
	Mounting Position	Contact	Left	Center	Right
20	1	NO	●		
	2	NO			●
40	1	NO	●		
	2	NO			●
	3	NO	●		
	4	NO			●

2-position (Up/Down)

Contact Code	Contact Block		Lever Operator Position		
	Mounting Position	Contact	Down	Center	Up
20	1	NO	●		
	2	NO			●
40	1	NO	●		
	2	NO			●
	3	NO	●		
	4	NO			●


4-position

Contact Code	Contact Block		Lever Operator Position				
	Mounting Position	Contact	Down	Left	Center	Up	Right
22N9	1	NC	●				
	2	NC					●
	3	NO	●				
	4	NO					●

Ordering Information


HW1M-L	Up R Dn L 1 1 1 1	F	22N9
Model HW1M: Standard HW1M-L: Interlocking	Lever Operation Mode Order of Entry Up → Right → Down → Left 1: Maintained 2: Spring returned 0: Blocked	Terminal Style Code F: Finger-safe (IP20) blank: Spring-up screw	Contact Code Select a required contact operation at each lever operator position from the contact arrangement charts above and specify the Contact Code.

Dimensions

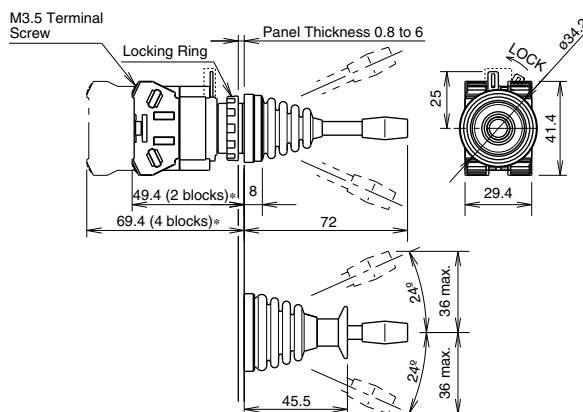

All dimensions in mm.

Contact Block Mounting Position and Lever Operator Position

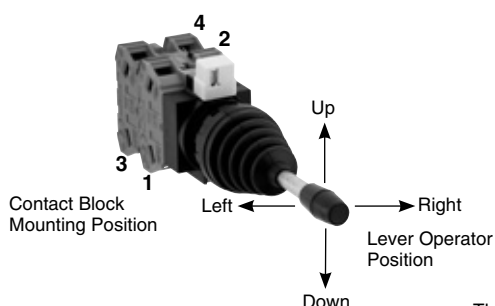

The above figure illustrates spring-up screw contact blocks.

The depth of each finger-safe (IP20) contact block is 0.9 mm longer than that of a spring-up screw contact block.

ø22 HW series Accessories and Replacement Parts

Accessories

Nameplates

HWAM, HWAQ, HWAS, and HWAV

Description	Legend	Material	Part No.	Ordering No.	Package Quantity	Dimensions (mm)
HWAM	Order marking plate separately.	Plastic (black) 1.5 mm thick	HWAM	HWAM	1	
				HWAMPN10	10	
HWAQ	Order marking plate separately.	Plastic (black) 1.5 mm thick	HWAQ	HWAQ	1	
				HWAQPN10	10	
HWAS	Blank	Plastic (black) 1.5 mm thick	HWAS-0	HWAS-0	1	
				HWAS-0PN10	10	

Making Plate


Description	Material	Part No.	Ordering No.	Package Quantity	Dimensions (mm)
HWNP	Aluminum (black) 1.0 mm thick	HWNP-*	HWNP*	1	White legend on black background.
			HWNP-*PN10	10	

• Specify a legend code in place of * in the Ordering No.


Legends

Code	Legend
0	(blank)
1	ON
2	OFF
3	START
4	STOP
31	OFF-ON
33	HAND-AUTO
53	HAND-OFF-AUTO

- Installing the marking plate on a nameplate










- To remove the marking plate, insert the flat screwdriver between the marking plate and nameplate.

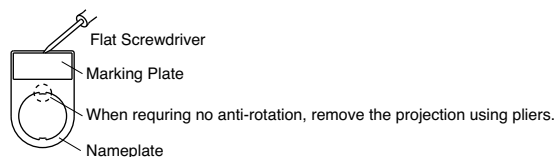

Note: When using an nameplate, the mounting panel thickness is decreased by 1.5 mm.

HW Series Accessories and Replacement Parts ø22

Accessories

Shape	Material	Part No.	Ordering No.	Package Quantity	Dimensions (mm)
	Metal (weight: approx. 150g)	MW9Z-T1	MW9Z-T1	1	Used to tighten the locking ring when installing the HW switch onto a panel. 
	Rubber	OR-55	OR-55	1	Used to install and remove the LED/incandescent lamps. 
	Metal/ Rubber	TW-KC1	TW-KC1	1	Used to remove the contact block and transformer, and also to install/remove the pilot light and illuminated pushbutton lens. 
	Plastic	HW9Z-RL	HW9Z-RLPN10	10	Used to prevent the operator from turning. Generally used when using no nameplates on selector switches and pushbutton selectors. 
	Rubber (black)	OB-31	OB-31PN05	5	Used to plug the unused ø22.2mm mounting holes. 
	Diecast Metal (locking ring: polyamide plastic)	LW9Z-BM	LW9Z-BM	1	- Used to plug the unused ø22.2mm mounting holes. - Tighten the locking ring to a torque of 1.2 N·m. IP66 - Mounting panel thickness: 0.8 to 6 mm 
	Plastic (polyamide)	LW9Z-BP1	LW9Z-BP1	1	- Used to plug the unused ø22.2mm mounting holes. - Tighten the locking ring to a torque of 2.0 N·m. IP65 - Mounting panel thickness: 0.8 to 6 mm
	Plastic (polyamide)	HW-VG1	HW-VG1PN10	10	Used to prevent contact between adjacent lead wires when units are mounted closely. Barriers should always be used in close mounting. 

Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces





Sensors

Control
StationsExplosion
Protection

References




ø22 HW series Accessories and Replacement Parts

Accessories

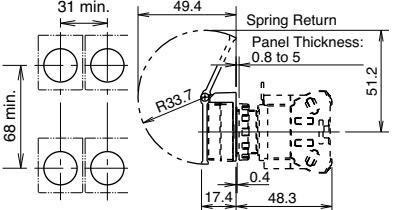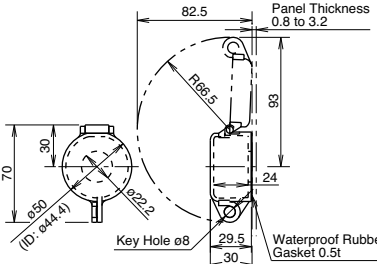Shape		Material	Part No.	Ordering No.	Package Quantity	Dimensions (mm)
	Spring Return	Plastic	HW9Z-K1	HW9Z-K1	1	- Used to prevent inadvertent operation for flush pushbuttons and illuminated pushbuttons. - IP65 - Maintained type stops at 90° and 180°. 
	Maintained		HW9Z-K11	HW9Z-K11	1	
	For flush pushbuttons	Rubber (EPDM)	OC-31	OC-31	1	- Used to cover and protect pushbuttons where units are subject to watersplash. Not suitable for outdoor use or where the units are subject to oil splash. - Cannot be used with nameplates HWAM, HWAQ, HWAS, or HWAV. 
	For extended pushbuttons		OC-32	OC-32	1	
		Polyarylate (gasket: nitril rubber)	HW9Z-KL1	HW9Z-KL1	1	Used to protect pushbuttons, illuminated pushbuttons, selector switches, and key selector switches. 
		Clear Silicon Rubber	HW9Z-D7D	HW9Z-D7D	1	Degree of protection: IP65 
		Rubber	HW9Z-A25	HW9Z-A25PN05	5	- Used to install the HW/TW units into ø25 mm mounting holes. - IP65 - Cannot be used with anti-rotation ring and nameplate. - Mounting panel thickness: 1.2 to 6.0 mm
		Gasket: nylon Washer: metal (brass)	HW9Z-A30	HW9Z-A30PN02	2	- Used to install the HW units into ø30 mm mounting holes (except for HW1E, HW1B-M5/V5, and HW7D). - IP65 - Cannot be used with anti-rotation ring, nameplate, full-shroud illuminated pushbuttons, pushbutton selectors, and mono-lever switches. - Mounting panel thickness: 1.6 to 4.0 mm
		Gasket: rubber Washer: metal	HW9Z-A30E	HW9Z-A30EPN02	2	Used to install HW1B-M5/HW1P-5Q units into ø30 mm mounting holes.

HW Series Accessories and Replacement Parts ø22

Maintenance Parts

Shape	Specification		Part No.	Ordering No.	Package Quantity	Remarks
Contact Block Spring-up screw 	NO contact		HW-G10	HW-G10	1	
	1NC contact		HW-G01	HW-G01	1	
	EM (early make) contact		HW-G10R	HW-G10R	1	
	LB (late break) contact		HW-G01R	HW-G01R	1	
Contact Block Finger-safe (IP20) 	1NO contact		HW-F10	HW-F10	1	
	1NC contact		HW-F01	HW-F01	1	
	EM (early make) contact		HW-F10R	HW-F10R	1	
	LB (late break) contact		HW-F01R	HW-F01R	1	
Dummy Block 	Nylon		TW-DB	TW-DBPN10	10	
Full Voltage Adapter  (Photo: Spring-up screw)	Spring-up screw		HW-GA1	HW-GA1PN02	2	
	Finger-safe (IP20)		HW-DA1FB	HW-DA1FB	1	
Transformer  (Photo: Spring-up screw)	100/110V AC	Spring-up screw	HW-T16	HW-T16	1	• For illuminated pushbuttons and illuminated selector switches.
		Finger-safe (IP20)	TW-F16B	TW-F16B	1	
	115/120V AC	Spring-up screw	HW-T126	HW-T126	1	
		Finger-safe (IP20)	TW-F126B	TW-F126B	1	
	200/220V AC	Spring-up screw	HW-T26	HW-T26	1	
		Finger-safe (IP20)	TW-F26B	TW-F26B	1	
	230/240V AC	Spring-up screw	HW-T246	HW-T246	1	
		Finger-safe (IP20)	TW-F246B	TW-F246B	1	
	380V AC	Spring-up screw	—	—	—	
		Finger-safe (IP20)	TW-F386B	TW-F386B	1	
	400/440V AC	Spring-up screw	HW-L46	HW-L46	1	
		Finger-safe (IP20)	TW-F46B	TW-F46B	1	
480V AC	Spring-up screw	HW-L486	HW-L486	1		
	Finger-safe (IP20)	TW-F486B	TW-F486B	1		
DC-DC Converter 	110V DC	Spring-up screw	HW-L16D	HW-L16D	1	
Button 	Round flush with round or square bezel	Polyacetal	HW1A-B1①	HW1A-B1①PN05	5	• Specify a button color code in place of ①. B (black) G (green) R (red) S (blue) W (white) Y (yellow)
	Round extended with round or square bezel		HW1A-B2①	HW1A-B2①PN05	5	
	Square flush		HW2A-B1①	HW2A-B1①PN05	5	
	Square extended		HW2A-B2①	HW2A-B2①PN05	5	
	ø29mm mushroom		HW1A-B3①	HW1A-B3①PN02	2	
	ø40mm mushroom		HW1A-B4①	HW1A-B4①PN02	2	

Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces


Sensors

Control
StationsExplosion
Protection

References

ø22 HW series Accessories and Replacement Parts

Maintenance Parts


Shape		Specification	Part No.	Ordering No.	Package Quantity	Color Code
Lens (for pilot lights and illuminated pushbuttons) 	Round flush	Polyarylate	HW9Z-L11②	HW9Z-L11②PN05	5	A (amber), C (clear), G (green), R (red), S (blue), Y (yellow) Use a clear lens for pure white and white illumination.
	Square flush		HW9Z-L21②	HW9Z-L21②PN05	5	
	Round extended		HW9Z-L12②	HW9Z-L12②PN05	5	
Lens (for illuminated pushbuttons) 	ø29mm mushroom	AS, Marking type	ALW31L-②	ALW31L-②PN02	2	C (clear), G (green), R (red), S (blue)
	ø40mm mushroom		ALW31LD-②	ALW31LD-②PN02	2	A (amber), Y (yellow)
			ALW41L-②	ALW41L-②	1	C (clear), G (green), R (red), S (blue)
			ALW41LD-②	ALW41LD-②	1	A (amber), Y (yellow)
Dome Lens for Pilot Light 		AS resin	HW1A-P2②	HW1A-P2②PN05	5	A (amber), G (green), R (red), S (blue), W (white), and Y (yellow)
Jumbo Dome Lens 		Polycarbonate	HW1A-P5②	HW1A-P5②	1	A: amber, G: green, R: red, S: blue, W: white, Y: yellow
Marking Plate 	Round flush	Acrylic	HW9Z-P11	HW9Z-P11PN05	5	• White
	Round extended		HW9Z-P12	HW9Z-P12PN05	5	
	Square flush		HW9Z-P21	HW9Z-P21PN05	5	
	ø29/40mm mushroom		ALW3B	ALW3BPN05	5	
Operator Knob for Illuminated Selector Switch 		AS Resin	HW9Z-FDY②	HW9Z-FDY②	1	A (amber), G (green), R (red), S (blue), W (white), Y (yellow) Use a white (W) knob/lever for pure white illumination.
Operator Lever for Illuminated Selector Switch 			HW9Z-FDL②	HW9Z-FDL②	1	
Spare Key (Disc Tumbler Key) 		Metal (nickel-plated brass)	HW9Z-SK-231	HW9Z-SK-231PN02	2	
Spare Key (Pin Tumbler Key) 		Metal (nickel-plated brass)	LW9Z-SK-500	LW9Z-SK-500PN02	2	Standard key number
			LW9Z-SK-□	LW9Z-SK-□PN02		Key number 501 to 515
Locking Ring 		Plastic	HW9Z-LN	HW9Z-LNPN05	5	• Black
Cap for Mono-Lever Switch 	Standard	Rubber	HW9Z-CPM	HW9Z-CPM	1	
Boot for Mono-Lever Switch 			HW9Z-BLM	HW9Z-BLM	1	
Diffusing Lens 		Polycarbonate	HW9Z-PP5C	HW9Z-PP5C	1	Diffusing lens is used for LED type jumbo dome pilot lights only.
Safety Lever Lock 		Plastic	HW9Z-LS	HW9Z-LSPN10	10	• Yellow
Gasket 		Rubber	HW9Z-WM	HW9Z-WMP10	10	

Note: Specify a button color code or lens color code in place of ① or ② in the Ordering No.


HW Series Accessories and Replacement Parts ø22

Maintenance Parts


LED Lamps (LSTD) [except for HW Jumbo Dome pilot lights]

Dimensions	Operating Voltage	Current Draw		Part No.	Ordering No.	Illumination Color Code	Package Quantity	Base
		AC	DC					
 	6V AC/DC $\pm 5\%$	8 mA	7 mA (A, R, W.) 5.5 mA (G, PW, S)	LSTD-6②	LSTD-6②	Specify a color code in place of ② in the Ordering No. A: amber G: green PW: pure white R: red S: blue W: white Use a pure white (PW) LED lamp with yellow (Y) lens.	1	BA9S/13
					LSTD-6②PN10		10	
	12V AC/DC $\pm 10\%$	11 mA	10 mA	LSTD-1②	LSTD-1②		1	
					LSTD-1②PN10		10	
	24V AC/DC $\pm 10\%$	11 mA	10 mA	LSTD-2②	LSTD-2②		1	
					LSTD-2②PN10		10	


LED Lamps (LSTDB) [used for HW Jumbo Dome pilot lights only]

Operating Voltage	Current Draw		Part No.	Illumination Color Code	Package Quantity	Dimensions
	AC	DC				
24V AC/DC $\pm 10\%$				Specify a color code in place of ② in the Ordering No. A: amber G: green PW: pure white R: red S: blue W: white Use a pure white (PW) LED lamp with yellow (Y) lens.	1	 

Incandescent Lamps (LS) [except for HW Jumbo Dome pilot lights]

Rated Operating Voltage	Lamp Ratings	Part No. (Ordering No.)	Package Quantity	Dimensions
6V AC/DC	1W (6.3V)	LS-6	1	
12V AC/DC	1W (18V)	LS-8		
18V AC/DC	1W (24V)	LS-2		
24V AC/DC	1W (30V)	LS-3		

Incandescent Lamps (LSB) [used for HW Jumbo Dome pilot lights only]

Rated Operating Voltage	Lamp Ratings	Part No.	Ordering No.	Package Quantity	Dimensions
24V AC/DC	28V, 0.17A	LSB-2	LSB-2PN02	2	

Flush Silhouette

Switches & Pilot Lights

Display Lights

LED Illumination Units

Display Units

Safety Products

Terminal Blocks

Comm. Terminals

AS-Interface

Relays & Timers

Sockets

Circuit Protectors

Power Supplies

PLCs & SmartRelay

Operator Interfaces

Sensors


Control Stations

Explosion Protection

References

ø22 HW series Accessories and Replacement Parts


Transformer

Shape	Primary Voltage	Secondary Voltage	Part No.	Applicable Load
	100/110V AC	5.5V AC, 1W	TWR516	LSTD-6 LED lamp (6V AC/DC) or LS-6 incandescent lamp (6V AC/DC, 1W)
	115/120V AC		TWR5126	
	200/220V AC		TWR526	
	230/240V AC		TWR5246	
	380V AC		TWR5386	
	400/440V AC		TWR546	
	480V AC		TWR5486	

Specifications

Operating Voltage	100/110V AC, 115/120V AC, 200/220V AC, 230/240V AC, 380V AC, 400/440V AC, 480V AC (50/60Hz)
Current Draw	2.4 VA
Rated Insulation Voltage	600V
Insulation Resistance	100 MΩ minimum (500V DC megger)
Operating Temperature	-30 to +60°C (no freezing)
Storage Temperature	-40 to +80°C (no freezing)
Operating Humidity	35 to 85% RH (no condensation)
Vibration Resistance	Damage Limits: 30 Hz, amplitude 1.5 mm Operating extremes: 5 to 55 Hz, amplitude 0.5 mm
Shock Resistance	Damage limits: 1,000 m/s ² Operating Extremes: 100 m/s ²
Dielectric Strength	2,500V AC, 1 minute
Terminal Screw	M3.5
Applicable Wire	2 mm ² maximum, 2 wires maximum
Weight (approx.)	87g

Dimensions

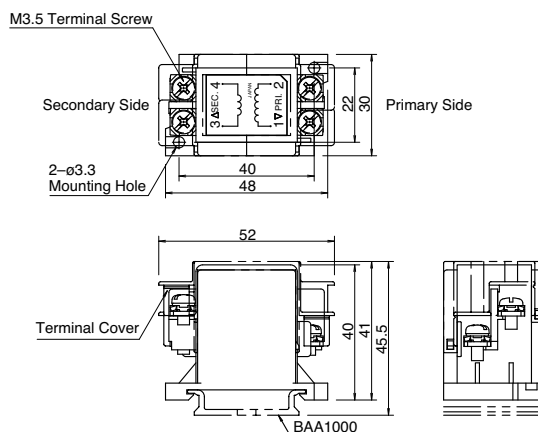


Accessories

DIN Rail

Part No.	Ordering No.	Length	Weight (approx.)	Material	Package Quantity
BAA1000	BAA1000PN10	1000 mm	200g	Aluminum	10
BAP1000	BAP1000PN10	1000 mm	320g	Steel	10

End Clip

Part No.	Ordering No.	Applicable DIN Rail	Weight (approx.)	Material	Package Quantity	Dimensions
BNL6	BNL6PN10	BAA1000 BAP1000	15g	Steel (Zinc-plated)	10	

• Use plastic end clip BC9Z-E/NS35N when using 400/440V AC primary voltage transformers.

Safety Precautions

- Turn off the power to the HW series control units before installation, removal, wiring, maintenance, and inspection of the HW series control units. Failure to turn power off may cause electrical shocks or fire hazard.
- To avoid a burn on your hand, use the lamp holder tool when replacing lamps.
- For wiring, use wires of a proper size to meet the voltage and current requirements. Tighten the M3.5 terminal screws to a tightening torque of 1.0 to 1.3 N.m. Failure to tighten terminal screws may cause overheating and fire.

Instructions

Panel Mounting


Remove the contact block from the operator (for transformer type pilot lights, remove the transformer from the illumination unit). Remove the locking ring from the operator. Insert the operator into the panel cut-out from the front, tighten the locking ring from the back, then install the contact block to the operator.

Removing and Installing the Contact Block

1. To remove the operator from the contact block, turn the locking lever in the direction of the arrow shown below. Then the operator can be pulled out.
2. To reinstall, place the TOP markings on the operator and the contact block mounting adapter in the same direction, and insert the operator into the contact block mounting adapter. Then turn the locking lever in the opposite direction.




3. When the spacing is narrower than the recommended value, with the lever unlocked, mount the safety lever lock and insert the contact unit to the operator. Then, lock the lever and strongly push in the safety lever lock to install.
4. To remove the safety lever lock, insert a flat screwdriver into the safety lever lock and push upwards.

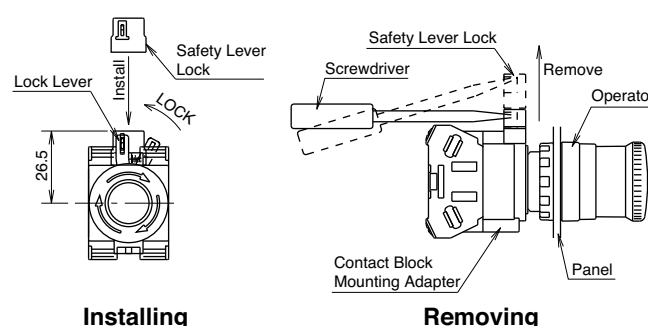

When removing safety lever, make sure that the screwdriver does not touch the contact block.


Ring Adapter

HW9Z-A25

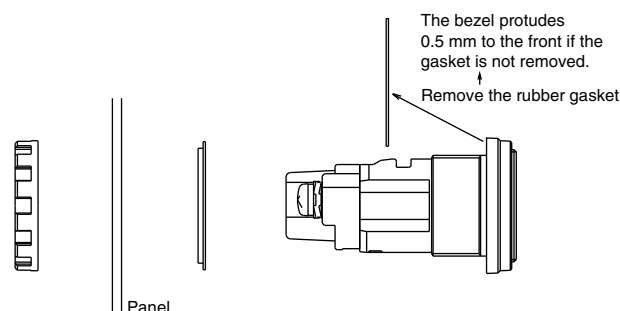


Dimensions

Panel cut-out

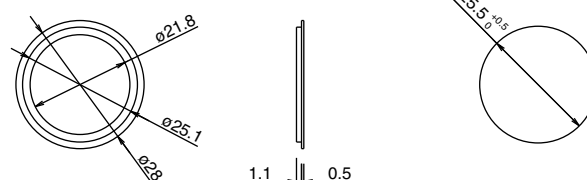

Removing and Installing the Transformer Unit on Pilot Lights

1. Insert a flat screwdriver (5mm wide at the maximum) into the latch hole on the transformer unit as shown in the photo below, and disengage the latch. Then pull out the illumination unit.
2. To reinstall, place the TOP marking on the illumination unit and the latch in the same direction, and push the illumination unit into the transformer unit.



Notes for Panel Mounting

1. When mounting the operator onto a panel, use the optional locking ring wrench (MW9Z-T1) to tighten the locking ring. Tightening torque must not exceed 2.0 N.m. Do not use pliers. Excessive tightening will damage the locking ring.
2. For the contact blocks and transformers housing LED and incandescent lamps, make sure not to press the lamps too hard, otherwise the lamp socket may be impaired.

Notes for Illuminated Pushbuttons

The full shroud cannot be removed from the extended full shroud type.

Safety Lever Lock

IEC strongly recommends using the safety lever lock (HW9Z-LS, yellow) to prevent heavy vibration or maintenance personnel from unlocking contacts.

1. HW series can be mounted vertically with a minimum spacing of 50 mm (70 mm for mono-lever switches) but spacing should be determined to ensure easy operation.
2. Mount the control unit onto the panel, lock the lever, and strongly push in the safety lever lock to install.

Flush
Silhouette

Switches &
Pilot Lights

Display
Lights

LED
Illumination
Units

Display
Units

Safety
Products

Terminal
Blocks

Comm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
Protectors

Power
Supplies

PLCs &
SmartRelay

Operator
Interfaces

Sensors


Control
Stations

Explosion
Protection


References

Instructions


HW9Z-A30

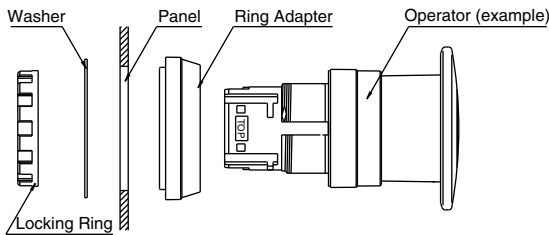

Dimensions

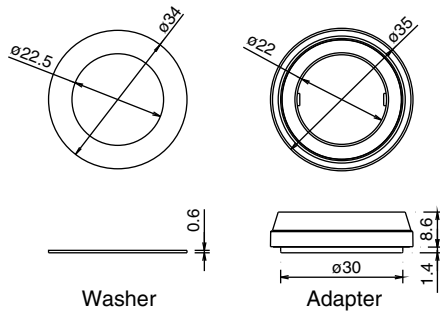

Panel-Cut




Replacement of Lens and Marking Plate

Removing


1. Remove the lens unit (color lens, marking plate, and lens holder) by inserting a screwdriver into the recess of the lens through the bezel.

[Removing the Lens Unit]

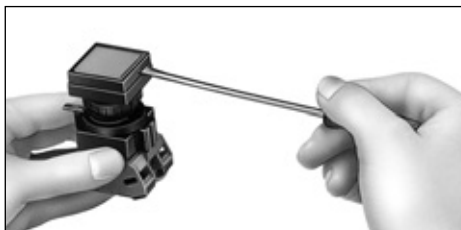

2. Remove the marking plate by pushing the lens from the rear to disengage the latches between the lens and the lens holder, using the screwdriver as shown below.


[Removing the Lens]

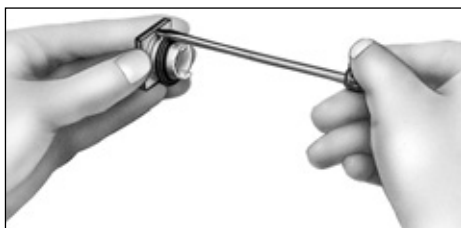

Note: The translucent filter in the lens holder cannot be removed because this filter is sealed to make the unit waterproof and oiltight.


Installing

[For Round Lens]



1. Place the marking plate on the lens holder with the anti-rotation projection engaged and press the lens onto the lens holder to engage the latches.
2. Place the marking plate in the correct orientation.

[For Square Lens]



1. Place the marking plate on the lens holder and press the lens onto the lens holder to engage the latches.
2. Place the marking plate in the correct orientation.

Marking


For HW series illuminated pushbuttons and pilot lights, legends and symbols can be engraved on the built-in marking plates, or printed film can be inserted under the lens for labeling purposes. Films are not supplied with illuminated pushbuttons, and may be provided by the user.

Marking Plates and Marking Film Size

Lens Style	Round Lens	Square Lens
Built-in Marking Plate	• Engraving must be made on the engraving area within 0.5mm deep. • The marking plate is made of white acrylic resin.	
Applicable Marking Film	• Mylar for printing labels is not supplied and must be provided and printed by the user. • Two 0.1mm-thick films or one 0.2mm-thick film can be installed in the lens. • Recommended marking film: Mylar	

Insertion Order of Marking Plate and Film


[Round Lens]

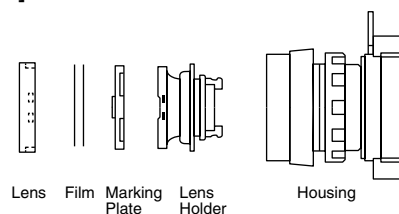

Note: Films are not supplied.

Instructions

[Square Lens]

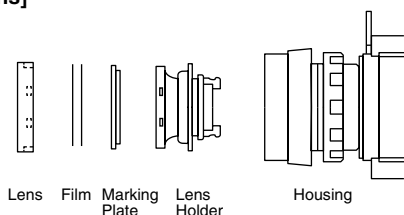


Note: Films are not supplied.

Replacement of Lens for Dual Pushbuttons

Removing

Remove the lens by inserting a screwdriver into the recess of the lens through the bezel.

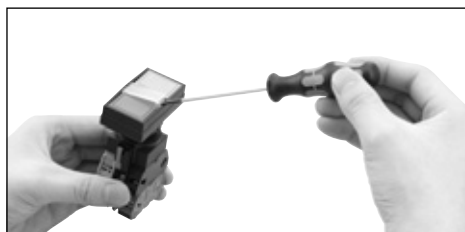

Installing

Install the lens in the recess between the buttons by pressing against the bezel.


Replacement of Lamps

Lamps can be replaced by using the lamp holder tool (OR-55) from the front of the panel, or by removing the contact block from the operator unit.

Removing the Lamps from the Front of the Panel


[How to Remove]

1. To remove, slip the lamp holder tool onto the lamp head lightly. Then push slightly, and turn the lamp holder tool counterclockwise.




[How to Install]

1. To install, insert the lamp head into the lamp holder tool, and hold the lamp as shown in the figure below.




2. Place the pins on the lamp base to the grooves in the lamp socket. Insert the lamp and turn it clockwise.




Nameplate

When anti-rotation is not required, remove the projection from the nameplate using pliers.




Close Mounting

When mounting the units closely in a horizontal row on 30 mm centers, use optional barriers to prevent interconnection between adjoining terminals. The barriers can be attached simply by pressing them onto the sides of contact blocks.

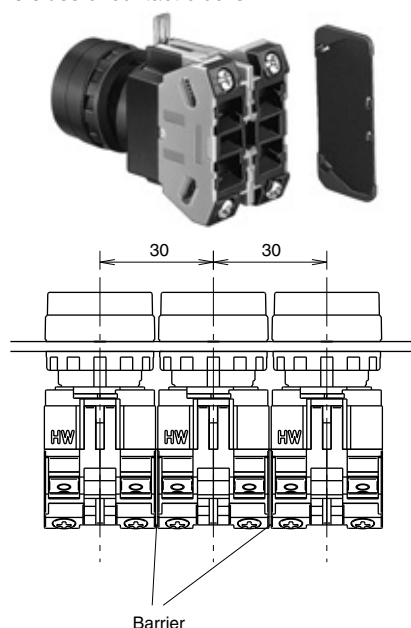

When mounting transformer type illuminated units closely in a horizontal row on 30 mm centers, insert solid wires or stranded wires into inside of the terminal screw on the transformer (see figure below) to prevent short circuit between adjoining terminals.

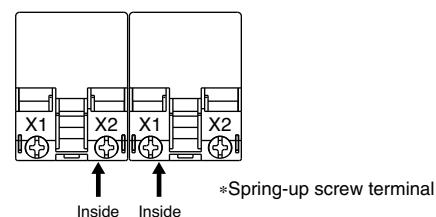

When using transformer type pilot lights closely mounted in horizontal and vertical rows on 30 mm centers, keep the ambient temperature below 40°C.

Tightening Torque for Terminal Screws

Tighten the M3.5 terminal screws to a torque of 1.0 to 1.3 N·m.

Installation of LED Illuminated Units

1. When using full voltage type LED illuminated units, provide protection against electrical noise, if necessary.
2. Notes for Pure White LED Lamps
 - Do not use the pure white LED outdoors, otherwise it will lead to the degradation of brightness and color. Do not remove or apply shock to the cap on the pure white LED lamp, otherwise it may break or damage the cap.
 - Use a white lens. The illumination color will be dull if a different color lens is used.

Flush
Silhouette

Switches &
Pilot Lights

Display
Lights

LED
Illumination
Units

Display
Units

Safety
Products

Terminal
Blocks

Comm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
Protectors

Power
Supplies

PLCs &
SmartRelay

Operator
Interfaces

Sensors

Control
Stations

Explosion
Protection

References


Instructions

Applicable Wiring




The applicable wire size is 2mm² maximum. (Solid wire ø1.6 mm max.) One or two wires can be connected.

Applicable Crimping Terminal (for spring-up screw terminal)

Crimping terminal for Ⓐ




Crimping terminal for Ⓑ



*Spring-up screw terminal


Be sure to use an insulation tube or cover on the crimping part of the crimping terminal to prevent electrical shocks.

Solid Wire




Anti-rotation Ring and Panel Cut-out

Align the TOP marking on the operator and the ▲ mark on the anti-rotation ring with the recess in the mounting panel.

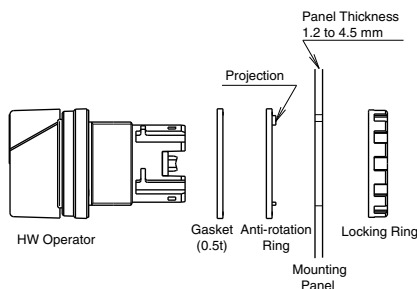

Panel Cut-out

(Complies with IEC60947-5-1)



Selector Switch

Be sure to turn the knob or key securely to each operator position.


Key Selector Switch

Notes for using a different key

When a different number key is inserted into the key hole, it will not normally operate. However, if the key is forced to turn or is not inserted properly, it may be turned.

Dual Pushbutton Switches

The pushbuttons cannot be removed or replaced.
Do not attempt to remove using a flat screwdriver or pincers, otherwise the pushbuttons may be damaged.



Installing the Rubber Boot for Dual Push-buttons

When using the HW7D pushbuttons in places where the pushbuttons are subject to water splash or an excessive amount of dust, make sure to use the HW9Z-D7D rubber boot (IP65) which is ordered separately.

Notes for Installing the Rubber Boot

Remove the gasket from the operator, and install the rubber boot on the operator. Pull out the seals of the rubber boot and place them around the operator sleeve as shown. Make sure that the seals are not twisted or tucked inside and that the gasket does not remain, otherwise the normal waterproof and dustproof characteristics are not ensured.

- ① Remove the gasket.
- ② Install the rubber boot on the pushbuttons.
- ③ Rubber boot is installed.

