



BN-W / BNH-W Series Terminal Blocks

UL recognized, CSA certified, and TÜV compliant.

Touch-down terminals reduce wiring time.

- Molded from UL94V-0 material with excellent flame and shock resistance.
- Terminal blocks can be mounted on a 35-mm-wide DIN rail and 30-mm-wide IEC type C rail.

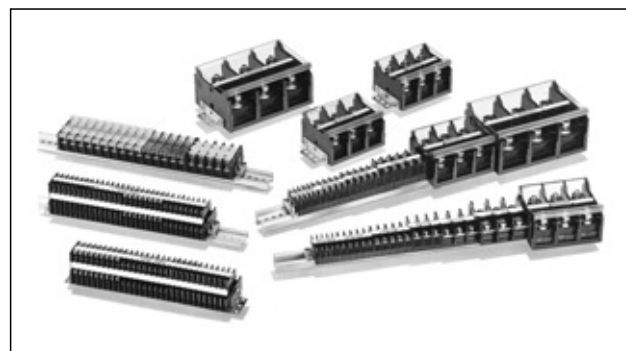


- 9.5-mm-wide marking strips can be used on all models. 17-mm-wide sliding type marking strips also available. (BN10W to BN30W)
- Terminal blocks of different shapes and capacities can be installed without using an end plate. (BN□10W to BN□150W)
- Screw and stud terminals available for large capacity terminal blocks.
- Additional mounting and removal of terminals is easy. (BN□10W to BN□150W)
- Complies with JIS C 2811.
- UL recognized, CSA certified, and EN compliant (TÜV approved). (Except common terminal)
- UL recognized for field wiring (FW2).

Applicable Standards	Mark	Certification Organization/ File No.
UL1059		UL recognized File No. E78117
CSA C 22.2 No.158		CSA File No. LR64803
EN60947-7-1		TÜV Rheinland License No. Standard: R9551701 Large Capacity: J9551516 J9650886 (BN500□, BN600□ only) Double-Deck: R9650688

Material

Parts Name	Material
Housing	Modified PPE
Bus Bars	Brass (Nickel-plated)
Terminal Screw	Steel (Zinc chrome-plated)
Spring	Stainless steel (touch-down type only)



Touch-down terminal blocks reduce wiring time. (BNH-W/BNDH-W Series)

1. Insert the Crimping Terminal
2. Push the Screw Down
3. Tighten the Screw



Terminal screw is always in the open position. No need to loosen the screw.



Push the screw down to temporarily hold the wire in place.



The screws can be tightened easily with a pneumatic screwdriver.

General Ratings

Dielectric Strength	2500V AC, 1 minute
Insulation Resistance	100 MΩ minimum
Operating Temperature	-25 to +55°C (no freezing)
Storage Temperature	-25 to +70°C (no freezing)
Operating Humidity	45 to 85% RH (no condensation)

Ratings/Terminal Screw Tightening Torque

Style	Part No.		UL/CSA Ratings		EN Ratings (*1)		JIS Ratings		Terminal Screw	Tightening Torque (N·m)
	Self-Lifting	Touch-Down	Voltage/Current	Wire Size (AWG)	Voltage/Current	Wire Size [mm²/(AWG)]	Voltage/Current	Wire Size (mm²)		
Standard	BN10W ★	BNH10W ★	600V/15A	22-16	660V/16A	1.25/(22-16)	600V/16A	1.25	M3	0.6 to 1.0
	BN15MW ★	BNH15MW ★	600V/15A	22-14	660V/22A	2/(22-14)	600V/16A	1.25 (2) *2	M3	0.6 to 1.0
	BN15LW ★	BNH15LW ★	600V/20A	22-14	660V/22A	2/(22-14)	600V/21A	2	M3.5	1.0 to 1.3
	BN15MWT ★	BNH15MWT ★	600V/15A	22-14	660V/22A	2/(22-14)	600V/21A	2	M3.5	1.0 to 1.3
	BN15LWT ★	BNH15LWT ★	600V/30A	22-14	660V/22A	3.5/(22-14)	600V/30A	3.5	M4	1.4 to 2.0
	BN30W ★	BNH30W ★	600V/35A	18-10	660V/38A	5.5/(18-10)	600V/40A	5.5	M4	1.4 to 2.0
	BN40W	BNH40W	600V/40A	16-8	660V/50A	8/(16-8)	600V/50A	8	M5	2.6 to 3.7
	BN50W	BNH50W	600V/50A	16-6	660V/67A	14/(16-6)	600V/70A	14	M5	2.6 to 3.7
	BN75W ★		600V/80A	16-4	660V/94A	22/(8-4)	600V/94A	22	M6	3.9 to 5.4
	BN100W		600V/100A	16-2	660V/132A	38/(2)	600V/132A	38	M8	10 to 13.5
Large Capacity	BN150W		600V/150A	16-1/0	660V/175A	60/(1/0)	600V/175A	60	M8	10 to 13.5
	BN150NW		600V/150A	16-1/0	660V/175A	60/(1/0)	600V/175A	60	M8	10 to 13.5
	BN200BW□, BN200NW□		600V/200A	4/0	660V/240A	100/(4/0)	600V/240A	100	M10	21 to 28
	BN300BW□, BN300NW□		600V/310A	300MCM	660V/310A	150/(300MCM)	600V/310A	150	M10	21 to 28
	BN400BW□, BN400NW□		600V/350A	400MCM	660V/370A	200/(400MCM)	600V/370A	200	M12	38 to 49
	BN500BW□, BN500NW□		600V/500A	500MCM	660V/430A	240/(500MCM)	600V/430A	250	M16	83 to 116
	BN600NW□		600V/600A	600MCM	660V/520A	300/(600MCM)	600V/520A	325	M16	83 to 116
	With Disconnecting Switch	BNT20	—	—	—	—	600V/20A	5.5	M4	1.4 to 2.0
With Fuse	BNF10S	—	—	—	—	—	600V/10A	5.5	M4	1.4 to 2.0
	BNF10N	—	—	—	—	—	600V/10A	5.5	M4	1.4 to 2.0
Double-Deck	BND15W	BNDH15W	600V/10A	22-14	660V/22A	2/(22-14)	600V/16A	1.25 (2) *2	M3	0.6 to 1.0
	BND15LW	BNDH15LW	600V/15A	22-14	660V/22A	2/(22-14)	600V/21A	2	M3.5	1.0 to 1.3
	BND15WT	BNDH15WT	600V/15A	22-14	660V/22A	2/(22-14)	600V/21A	2	M3.5	1.0 to 1.3
Common Terminal	BN15MC□	—	—	—	—	—	600V/16A Common Current	1.25 (2) *2	M3	0.6 to 1.0

*1: Ratings approved by TÜV based on EN60947-7-1.

*2: The rated applicable wire size is 1.25 mm², but 2 mm² wires can also be connected. The wire size in () does not comply with JIS standards.

*3: Part No. with ★ is UL recognized for field wiring (FW2).

Flush Silhouette

Switches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets

Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces

Sensors

Control
StationsExplosion
Protection

References

BN-W / BNH-W Series Terminal Blocks

Terminal Blocks

Terminal Style			Part No.	Ordering No.	Applicable Wire (mm²)	Terminal Screw	Width (mm)	Package Quantity	Page		
Standard											
Self-Lifting	1-pole	16A	BN10W	BN10WPN50	1.25	M3	7	50	1064		
			BN15MW	BN15MWPN50	1.25 (2) (Note)	M3	8	50			
		21A	BN15LW	BN15LWPN50	2	M3.5	10.5	50	1065		
			BN15MWT	BN15MWTPN50	2	M3.5	8	50			
		30A	BN15LWT	BN15LWTPN50	3.5	M4	10.5	50			
				40A	BN30W	BN30WPN50	5.5	M4	12	50	1066
				50A	BN40W	BN40WPN20	8	M5	14	20	
70A	BN50W			BN50WPN20	14	M5	15.5	20			
Touch-Down	1-pole	16A	BNH10W	BNH10WPN50	1.25	M3	7	50	1064		
			BNH15MW	BNH15MWPN50	1.25 (2) (Note)	M3	8	50			
		21A	BNH15LW	BNH15LWPN50	2	M3.5	10.5	50	1065		
			BNH15MWT	BNH15MWTPN50	2	M3.5	8	50			
		30A	BNH15LWT	BNH15LWTPN50	3.5	M4	10.5	50			
				40A	BNH30W	BNH30WPN50	5.5	M4	12	50	1066
				50A	BNH40W	BNH40WPN20	8	M5	14	20	
				70A	BNH50W	BNH50WPN20	14	M5	15.5	20	
Large Capacity (Rail Mount)											
Screw	1-pole	94A	BN75W	BN75WPN10	22	M6	20	10	1067		
		132A	BN100W	BN100WPN05	38	M8	26	5			
		175A	BN150W	BN150WPN05	60	M8	26	5	1068		
			BN150NW	BN150NWPN05	60	M8	26	5			
	2-pole	240A	BN200BW2	BN200BW2	100	M10	37	1	1069		
	3-pole		BN200BW3	BN200BW3							
	4-pole		BN200BW4	BN200BW4							
	2-pole	310A	BN300BW2	BN300BW2	150	M10	44	1	1070		
	3-pole		BN300BW3	BN300BW3							
	4-pole		BN300BW4	BN300BW4							
	2-pole	370A	BN400BW2	BN400BW2	200	M12	57	1	1071		
	3-pole		BN400BW3	BN400BW3							
4-pole	BN400BW4		BN400BW4								
Stud	2-pole	240A	BN200NW2	BN200NW2	100	M10	37	1	1069		
	3-pole		BN200NW3	BN200NW3							
	4-pole		BN200NW4	BN200NW4							
	2-pole	310A	BN300NW2	BN300NW2	150	M10	44	1	1070		
	3-pole		BN300NW3	BN300NW3							
	4-pole		BN300NW4	BN300NW4							
	2-pole	370A	BN400NW2	BN400NW2	200	M12	57	1	1071		
	3-pole		BN400NW3	BN400NW3							
4-pole	BN400NW4		BN400NW4								
Large Capacity (Surface Mount)											
Screw	2-pole	240A	BN200BW2K	BN200BW2K	100	M10	37	1	1069		
	3-pole		BN200BW3K	BN200BW3K							
	4-pole		BN200BW4K	BN200BW4K							
	2-pole	310A	BN300BW2K	BN300BW2K	150	M10	44	1	1070		
	3-pole		BN300BW3K	BN300BW3K							
	4-pole		BN300BW4K	BN300BW4K							
	2-pole	370A	BN400BW2K	BN400BW2K	200	M12	57	1	1071		
	3-pole		BN400BW3K	BN400BW3K							
	4-pole		BN400BW4K	BN400BW4K							
	2-pole	430A	BN500BW2K	BN500BW2K	250	M16	57	1	1072		
3-pole	BN500BW3K		BN500BW3K								
4-pole	BN500BW4K		BN500BW4K								
Stud	2-pole	240A	BN200NW2K	BN200NW2K	100	M10	37	1	1069		
	3-pole		BN200NW3K	BN200NW3K							
	4-pole		BN200NW4K	BN200NW4K							
	2-pole	310A	BN300NW2K	BN300NW2K	150	M10	44	1	1070		
	3-pole		BN300NW3K	BN300NW3K							
	4-pole		BN300NW4K	BN300NW4K							
	2-pole	370A	BN400NW2K	BN400NW2K	200	M12	57	1	1071		
	3-pole		BN400NW3K	BN400NW3K							
	4-pole		BN400NW4K	BN400NW4K							
	2-pole	430A	BN500NW2K	BN500NW2K	250	M16	57	1	1072		
	3-pole		BN500NW3K	BN500NW3K							
	4-pole		BN500NW4K	BN500NW4K							
	2-pole	520A	BN600NW2K	BN600NW2K	325	M16	57	1			
	3-pole		BN600NW3K	BN600NW3K							
4-pole	BN600NW4K		BN600NW4K								

* The rated applicable wire size is 1.25 mm², but 2 mm² wires can also be connected.
The wire size in () does not comply with JIS standards.

BN-W / BNH-W Series Terminal Blocks

Terminal Blocks

Terminal Style			Part No.	Ordering No.	Applicable Wire (mm²)	Terminal Screw	Width (mm)	Package Quantity	Page
With Disconnecting Switch, Fuse									
Disconnecting Switch	20A	1-pole	BNT20	BNT20PN20	5.5	M4	15	20	1073
With Fuse	10A	1-pole	BNF10S-□	BNF10S-□APN20	5.5	M4	15	20	
			BNF10N-□	BNF10N-□APN20					
Double-Deck Terminal Block									
Self-Lifting	16A	1-pole	BND15W	BND15WPN25	1.25 (2)*	M3	8	25	1074
Touch-Down			BNDH15W	BNDH15WPN25					
Self-Lifting	21A	1-pole	BND15LW	BND15LWPN25	2	M3.5	8	25	
Touch-Down			BNDH15LW	BNDH15LWPN25					
Self-Lifting	21A	1-pole	BND15WT	BND15WTPN25	2	M3.5	12	25	
Touch-Down			BNDH15WT	BNDH15WTPN25					
Common Terminal									
Self-Lifting Type 16A (Common Current)		4-pole	BN15MC4	BN15MC4PN10	1.25 (2)*	M3	8	10	1075
		8-pole	BN15MC8	BN15MC8PN10					
		10-pole	BN15MC10	BN15MC10PN10					

* The wire size in () does not comply with JIS standards.
The rated applicable wire size is 1.25 mm², but 2 mm² wires can also be connected.
Specify the fuse rating in place of □. 1A: 1, 3A: 3, 5A: 5.

Accessories

When ordering accessories, check if the accessories are necessary by referring to the table.

X: Necessary
O: Optional

Accessories

When ordering accessories, check if the accessories are necessary by referring to the table.

X: Necessary

O: Optional

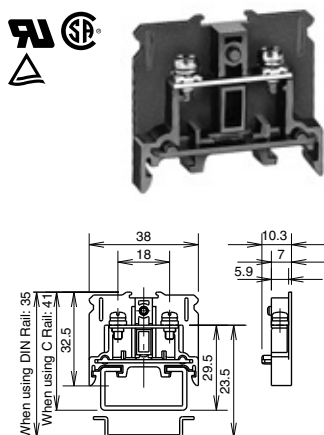
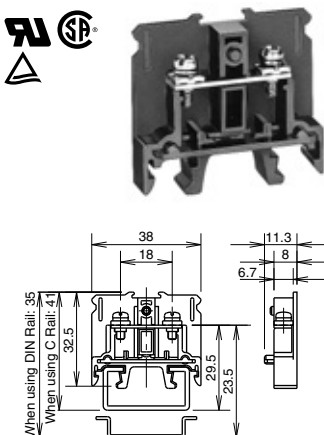
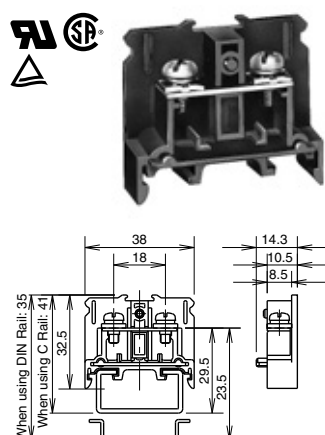
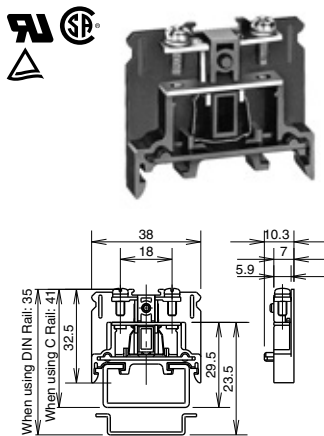
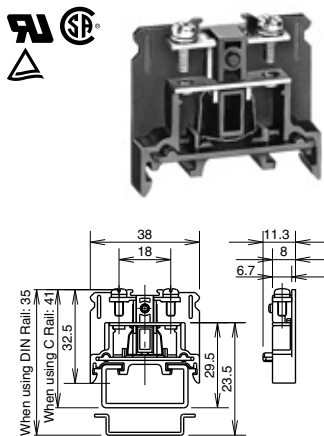
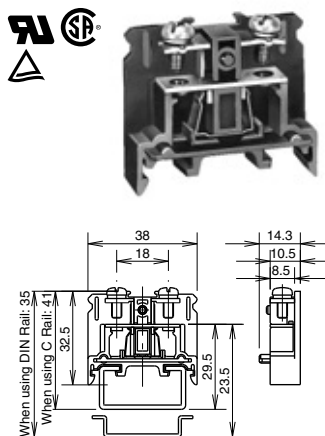



Terminal			Part No.	Accessories (X: Necessary)												
				End Plate	Rail	End Clip	Rail Mounting Clip	Dust Cover	Marking Strip	Marking Strip Fastener	Sliding Marking Strip	Jumper	Removal Tool	Surface Mount Clip	Connecting Rod	Connecting Nut
Standard	16A to 40A Self-Lifting Touch-Down	BN10W, BN15MW, BN15LW, BN15MWT, BN15LWT, BN30W		X	X	X	O	O	O	O	O	O	O	—	—	—
		BNH10W, BNH15MW, BNH15LW, BNH15MWT, BNH15LWT, BNH30W		X	X	X	O	O	O	O	—	O	O	—	—	—
	50A to 70A Self-Lifting Touch-Down	BN40W, BN50W, BNH40W, BNH50W		X	X	X	O	O	O	O	—	O	—	—	—	—
Large Capacity	Rail Mount 1-Pole 94A to 175A	BN75W, BN100W, BN150W, BN150NW		X	X	X	O	O	O	O	—	—	—	—	—	—
	Rail Mount 240A to 370A	BN200BW□, BN300BW□, BN400BW□ BN200NW□, BN300NW□, BN400NW□		—	X	X	—	Supplied	Supplied	—	—	—	—	—	—	—
	Surface Mount 240A to 520A	BN200BW□K, BN300BW□K, BN400BW□K BN200NW□K, BN300NW□K, BN400NW□K BN500BW□K, BN500NW□K, BN600NW□K		—	—	—	—			Supplied	Supplied	—	—	—	—	—
With Disconnecting Switch			BNT20	X	X	X	O	O	O	O	—	—	—	—	—	—
With Fuse			BNF10S, BNF10N	X	X	X	O	—	O	O	—	—	—	—	—	—
Double-Deck			BND15W, BND15LW, BNDH15W, BNDH15LW, BND15WT, BNDH15WT	X	X*1	X*1	O	O	O	O	—	X	—	X*2	X	X
Common Terminal			BN15MC□	—	X	X	—	O	O	O	O	—	—	—	—	—
*1: Accessory not necessary for surface mounting. *2: Accessory not necessary for rail mounting. Specify the number of poles in place of □.				1076		1077		1078		1079		1080				
Page																

*1: Accessory not necessary for surface mounting.

*2: Accessory not necessary for rail mounting.

Specify the number of poles in place of □.

BN-W / BNH-W Series Terminal Blocks

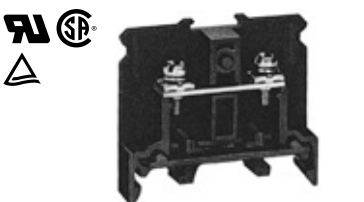
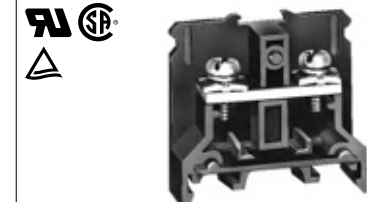



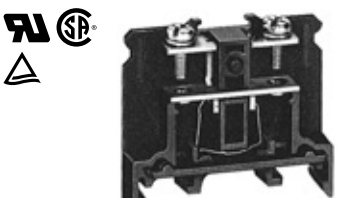
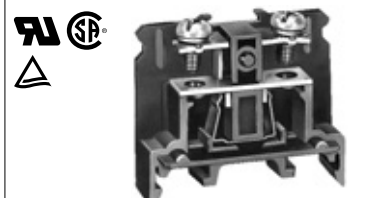
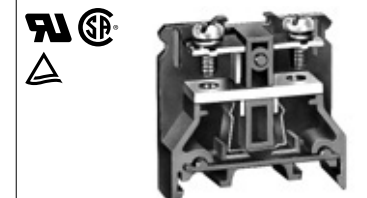






Standard	Self-Lifting Terminal	Part No.	BN10W	16A	M3	BN15MW	16A	M3	BN15LW	21A	M3.5	
		Dimensions										
		Ordering No.	BN10WPN50			BN15MWPN50			BN15LWPN50			
		Package Quantity	50			50			50			
		Weight (Approx.)	6.5g			7.3g			10g			
	Touch-Down Terminal	Part No.	BNH10W	16A	M3	BNH15MW	16A	M3	BNH15LW	21A	M3.5	
		Dimensions										
		Ordering No.	BNH10WPN50			BNH15MWPN50			BNH15LWPN50			
		Package Quantity	50			50			50			
		Weight (Approx.)	7.5g			8.2g			11.2g			
Standards			UL/CSA	EN	JIS	UL/CSA	EN	JIS	UL/CSA	EN	JIS	
Specification / Ratings	Insulation Voltage		600V	660V	600V	600V	660V	600V	600V	660V	600V	
	Wire Size *1		22-16 AWG	1.25 mm ² (22-16 AWG)	1.25 mm ²	22-14 AWG	2 mm ² (22-14 AWG)	1.25 mm ² (2mm ² max)	22-14 AWG	2 mm ² (22-14 AWG)	2 mm ²	
	Rated Current *2		15A	16A	16A	15A	22A	16A	20A	22A	21A	
	Terminal screw		M3			M3			M3.5			
	Crimping Terminal		1.25-3			1.25-3 (2-3)			2-3.5			
	Max. No. of Crimping Terminals		2			2			2			
Tightening Torque		0.6 to 1.0 N·m			0.6 to 1.0 N·m			1.0 to 1.3 N·m				
Crimping Terminal Dimensions (mm) *3												
Accessories	End Plate		BNE15W (see page 1076)									
	Dust Cover		BNC230 (see page 1077)									
	Marking Strip		PVC 1m/BNM7, Fiber glass 1m/BNM9, PVC 25m/BNM725 (see page 1078)									
	Marking Strip Fastner		BNM3 (see page 1078)									
	DIN Rail/End Clip		Aluminum: BAA1000, Steel: BAP1000 (see page 1076)/BNL6 (see page 1077)									
	C Rail/End Clip		Aluminum: BNCA1000, Steel: BNCP1000 (see page 1076)/BNL7 (see page 1077)									
DIN + C Rail/End Clip		Aluminum: BNJA1000 (see page 1076)/BNL6, BNL7 (see page 1077)										

*1: The wire size in () does not comply with JIS standards.

*2: The rated current differs according to operating conditions. See "Selecting Terminal Blocks by Current According to JIS Standards" on page 1057.

*3: Use a CSA certified crimping terminal when using the terminal block as a CSA certified product.

BN-W / BNH-W Series Terminal Blocks

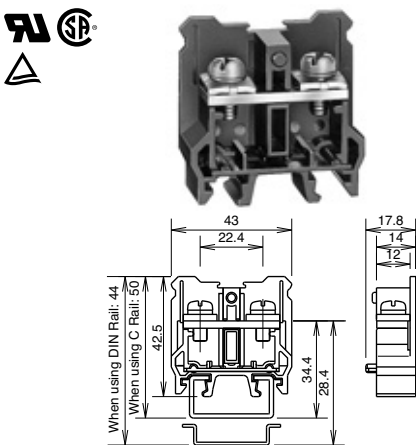
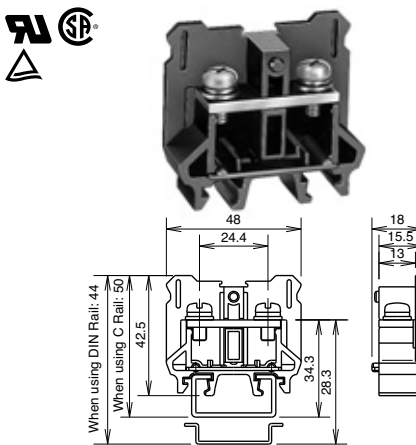
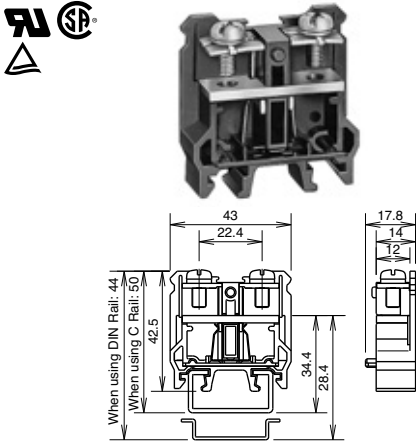
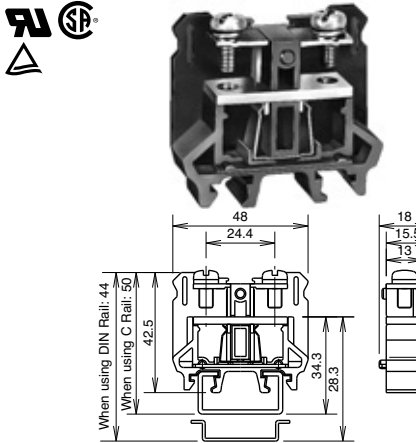


BN15MWT			21A	M3.5	BN15LWT			30A	M4	BN30W			40A	M4	Flush Silhouette
									Switches & Pilot Lights						
									Display Lights						
BN15MWTPN50			BN15LWTPN50			BN30WPN50			LED Illumination Units						
50			50			50			Display Units						
7g			10g			15.6g			Safety Products						
BNH15MWT			21A	M3.5	BNH15LWT			30A	M4	BNH30W			40A	M4	Terminal Blocks
									Comm. Terminals						
									AS-Interface						
BNH15MWTPN50			BNH15LWTPN50			BNH30WPN50			Relays & Timers						
50			50			50			Sockets						
8g			11g			16.8g			Circuit Protectors						
UL/CSA	EN	JIS	UL/CSA	EN	JIS	UL/CSA	EN	JIS	Power Supplies						
600V	660V	600V	600V	660V	600V	600V	660V	600V	PLCs & SmartRelay						
22-14 AWG	2 mm ² (22-14 AWG)	2 mm ²	22-14 AWG	3.5 mm ² (22-14 AWG)	3.5 mm ²	18-10 AWG	5.5 mm ² (18-10 AWG)	5.5 mm ²	Operator Interfaces						
15A	22A	21A	30A	22A	30A	35A	38A	40A	Sensors						
M3.5			M4			M4			Control Stations						
1.25-3.5 to 2-3.5			1.25-4 to 3.5-4			1.25-4 to 5.5-4			Explosion Protection						
2			2			2			References						
1.0 to 1.3 N·m			1.4 to 2.0 N·m			1.4 to 2.0 N·m									
															
BNE15W (see page 1076)						BNE30W (see page 1076)									
BNC230 (see page 1077)						BNC230 (see page 1077)									
PVC 1m/BNM7, Fiber glass 1m/BNM9, PVC 25m/725 (see page 1078)															
BNM3 (see page 1078)															
Aluminum: BAA1000, Steel: BAP1000 (see page 1076) /BNL6 (see page 1077)															
Aluminum: BNCA1000, Steel: BNCP1000 (see page 1076)/BNL7 (see page 1077)															
Aluminum: BNJA1000 (see page 1076)/BNL6 (see page 1077)						Aluminum: BNJA1000 (see page 1076)/BNL6, BNL7 (see page 1077)									

*1: The wire size in () does not comply with JIS standards.

*2: The rated current differs according to operating conditions. See "Selecting Terminal Blocks by Current According to JIS Standards" on page 1057.

*3: Use a CSA certified crimping terminal when using the terminal block as a CSA certified product.

BN-W / BNH-W Series Terminal Blocks

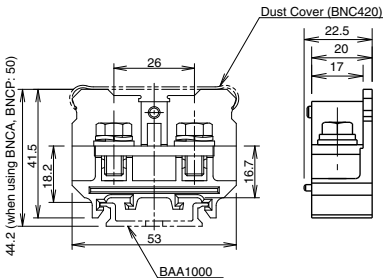

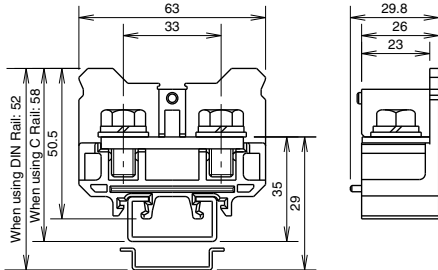

Standard	Self-Lifting Terminal	Part No.	BN40W50AM5			BN50W70AM5		
		Dimensions						
		Ordering No.	BN40WPN20			BN50WPN20		
		Package Quantity	20			20		
		Weight (Approx.)	25g			25.4g		
	Touch-Down Terminal	Part No.	BNH40W50AM5			BNH50W70AM5		
		Dimensions						
		Ordering No.	BNH40WPN20			BNH50WPN20		
		Package Quantity	20			20		
		Weight (Approx.)	25g			29g		
Standards		UL/CSA	EN	JIS	UL/CSA	EN	JIS	
Specification / Ratings	Insulation Voltage	600V	660V	600V	600V	660V	600V	
	Wire Size *1	16-8 AWG	8 mm ² (16-8 AWG)	8 mm ²	16-6 AWG	14 mm ² (16-6 AWG)	14 mm ²	
	Rated Current *2	40A	50A	50A	50A	67A	70A	
	Terminal screw	M5			M5			
	Crimping Terminal	1.25-5 to 8-5			1.25-5 to 14-5			
	Max. No. of Crimping Terminals	2			2			
Tightening Torque		2.6 to 3.7 N·m			2.6 to 3.7 N·m			
Crimping Terminal Dimensions (mm) *3								
Accessories	End Plate	BNE40W (see page 1076)			BNE50W (see page 1076)			
	Dust cover	BNC330 (see page 1077)			BNC320 (see page 1077)			
	Marking Strip	PVC 1m/BNM7, Fiber glass 1m/BNM9, PVC 25m/725 (see page 1078)						
	Marking Strip Fastner	BNM3 (see page 1078)						
	DIN Rail/End Clip	Aluminum: BAA1000, Steel: BAP1000 (see page 1076)/ BNL6 (see page 1077)			Aluminum: BAA1000, Steel: BAP1000 (see page 1076)/ BNL8 (see page 1077)			
	C Rail/End Clip	Aluminum: BNCA1000, Steel: BNCP1000 (see page 1076)/ BNL7 (see page 1077)			Aluminum: BNCA1000, Steel: BNCP1000 (see page 1076)/ BNL8 (see page 1077)			
DIN + C Rail/End Clip		Aluminum: BNJA1000 (see page 1076)/ BNL6, BNL7 (see page 1077)			Aluminum: BNJA1000 (see page 1076) /BNL8 (see page 1077)			



*1: The wire size in () does not comply with JIS standards.

*2: The rated current differs according to operating conditions. See "Selecting Terminal Blocks by Current According to JIS Standards" on page 1057.

*3: Use a CSA certified crimping terminal when using the terminal block as a CSA certified product.

BN-W / BNH-W Series Terminal Blocks

Large Capacity Screw Terminal	Part No.	BN75W94AM6			BN100W132AM8		
	Dimensions						
	Ordering No.	BN75WPN10			BN100WPN05		
	Package Quantity	10			5		
	Weight (Approx.)	45g			86g		

Standards		UL/CSA	EN	JIS	UL/CSA	EN	JIS
Specification / Ratings	Insulation Voltage	600V	660V	600V	600V	660V	600V
	Wire Size	16-4 AWG	22 mm ² (8-4 AWG)	22 mm ²	16-2 AWG	38 mm ² (2AWG)	38 mm ²
	Rated Current *1	80A	94A	94A	100A	132A	132A
	Terminal screw *2	M6			M8		
	Crimping Terminal	2-6 to 22-6			2-8 to 38-8		
	Max. No. of Crimping Terminals	2			2		
Socket Wrench		12.7 mm square drive hexagonal socket 10			12.7 mm square drive hexagonal socket 13		
Tightening Torque		3.9 to 5.4 N・m			10 to 13.5 N・m		
Crimping Terminal Dimensions (mm) *3							
Accessories	End Plate	BNE75W (see page 1076)			BNE100W (see page 1076)		
	Dust Cover	BNC420 (see page 1077)			BNC520 (see page 1077)		
	Marking Strip	PVC 1m/BNM7, Fiber glass 1m/BNM9, PVC 25m/BNM725 (see page 1078)					
	Marking Strip Fastner	BNM3 (see page 1078)					
	DIN Rail/End Clip	Aluminum: BAA1000, Steel: BAP1000 (see page 1076)/BNL8 (see page 1077)					
	Type C Rail/End Clip	Aluminum: BNCA1000, Steel: BNCP1000 (see page 1076)/BNL8 (see page 1077)					
DIN+Type C Rail/End Clip		Aluminum: BNJA1000 (see page 1076)/BNL8 (see page 1077)					

*1: The rated current differs according to operating conditions. See "Selecting Terminal Blocks by Current According to JIS Standards" on page 1057.

*2: The grooves on the head of the hex bolt are for temporary tightening. For proper tightening, use an applicable socket wrench and tighten within the range of the recommended tightening torque.

*3: Use a CSA certified crimping terminal when using the terminal block as a CSA certified product.

Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets

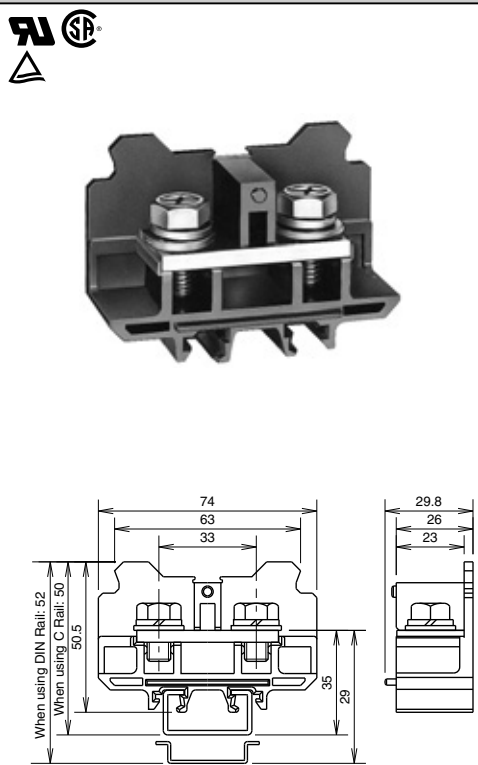
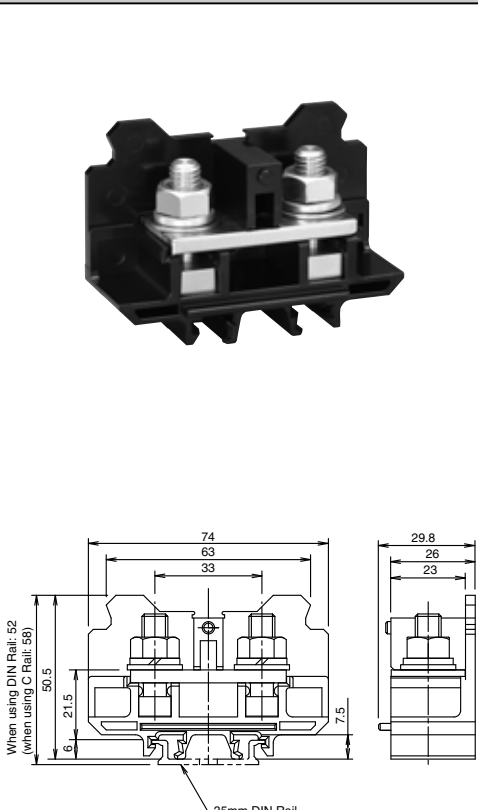

Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces

Sensors

Control
StationsExplosion
Protection

References

BN-W / BNH-W Series Terminal Blocks

Large Capacity Screw Terminal	Part No.	BN150W 175A M8			BN150NW 175A M8		
	Dimensions						
	Ordering No.	BN150WPN05			BN150NWP05		
	Packaging Quantity	5			5		
	Weight (Approx.)	88g			95g		
Standards	UL/CSA	EN	JIS	—	—	JIS	
Specification / Ratings	Insulation Voltage	600V	660V	660V	—	—	600V
	Wire Size	16-1/0 AWG	60 mm ² (1/0 AWG)	60 mm ²	—	—	60 mm ²
	Rated Current *1	150A	175A	175A	—	—	175A
	Terminal screw *2	M8			M8		
	Crimping Terminal	2-8 to 60-8			2-8 to 60-8		
	Max. No. of Crimping Terminals	2			2		
	Socket Wrench	12.7 mm square drive hexagonal socket 13 (*2)			12.7 mm square drive hexagonal socket 13 (*2)		
Tightening Torque	10 to 13.5 N·m			10 to 13.5 N·m			
Crimping Terminal Dimensions (mm) *3							
Accessories	End Plate	BNE150W (see page 1076)					
	Dust Cover	BNC520 (see page 1077)					
	Marking Strip	PVC 1m/BNM7, Fiber glass 1m/BNM9 PVC 25m/BNM725 (see page 1078)		PVC 1m/BNM7, Fiber glass 1m/BNM9 PVC 25m/BNM725 (see page 1078)			
	Marking Strip Fastner	BNM3 (see page 1078)					
	DIN Rail/End Clip	Aluminum BAA1000, Steel: BAP1000 (see page 1076)/ BNL8 (see page 1077)					
	Type C Rail/End Clip	Aluminum: BNCA1000, Steel: BNCP1000 (see page 1076)/ BNL8 (see page 1077)					
DIN+Type C Rail/End Clip	Aluminum: BNJA1000 (see page 1076)/BNL8 (see page 1077)						

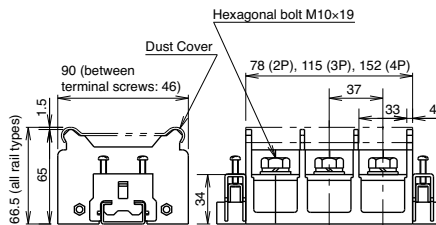

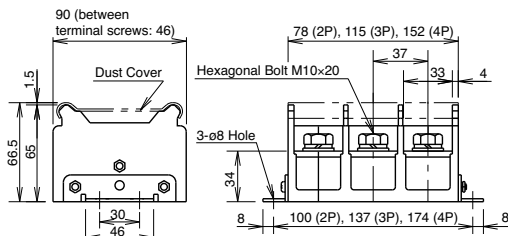
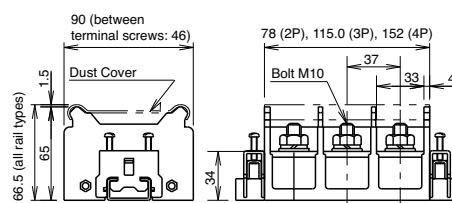

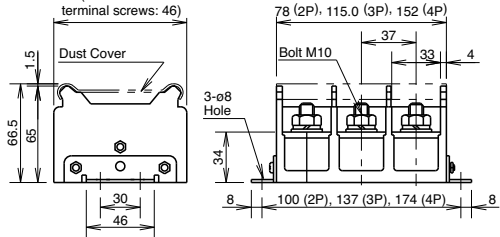

*1: The rated current differs according to operating conditions. See "Selecting Terminal Blocks by Current According to JIS Standards" on page 1057.

*2: The grooves on the head of the hex bolt are for temporary tightening. For proper tightening, use an applicable socket wrench and tighten within the range of the recommended tightening torque.

*3: Use a CSA certified crimping terminal when using the terminal block as a CSA certified product.

*4: Applicable wrench or screwdriver can be used for tightening screws.

BN-W / BNH-W Series Terminal Blocks

Large Capacity	Screw Terminal	Part No.	BN200BW□ 240A M10			BN200BW□K 240A M10 Surface Mount			
		Dimensions	 			  			
		Package Quantity	1			1			
		Weight (Approx.)	2P: 430g, 3P: 650g, 4P: 870g			2P: 490g, 3P: 710g, 4P: 930g			
	Stud Terminal	Part No.	BN200NW□ 240A M10			BN200NW□K 240A M10 Surface Mount			
		Dimensions	 			  			
		Package Quantity	1			1			
		Weight (Approx.)	2P: 500g, 3P: 720g, 4P: 940g			2P: 560g, 3P: 780g, 4P: 1000g			
	Specification / Ratings	Standards		UL/CSA	EN	JIS	UL/CSA	EN	JIS
		Insulation Voltage		600V	660V	600V	600V	660V	600V
Wire Size		4/0 AWG	100 mm ² (4/0 AWG)	100 mm ²	4/0 AWG	100 mm ² (4/0 AWG)	100 mm ²		
Rated Current *1		200A	240A	240A	200A	240A	240A		
Terminal Screw *2		M10			M10				
Crimping Terminal		5.5-10 to 100-10			5.5-10 to 100-10				
Max. No. of Crimping Terminals		2			2				
Socket Wrench		12.7 mm square drive hexagonal socket 17 (*2)			12.7 mm square drive hexagonal socket 17 (*2)				
Tightening Torque		21 to 28 N·m			21 to 28 N·m				
Crimping Terminal Dimensions (mm) *3									
Accessories (Supplied)		End Plate, Dust Cover (see page 1076, 1077), Marking Strip (see page 1078) are supplied. (Note) Marking Strip Fastener (BNM3) is not necessary.							
Accessories	DIN Rail		Aluminum: BAA1000, Steel: BAP1000 (see page 1076)			—			
	C Rail		Aluminum: BNCA1000, Steel: BNCP1000 (see page 1076)			—			
	DIN+C Rail		Aluminum: BNJA1000 (see page 1076)			—			
	End Clip		BNL8 (see page 1077)			—			

*1: The rated current differs according to operating conditions. See "Selecting Terminal Blocks by Current According to JIS Standards" on page 1057.

*2: The grooves on the head of the hex bolt are for temporary tightening. For proper tightening, use an applicable socket wrench and tighten within the range of the recommended tightening torque.

*3: Use a CSA certified crimping terminal when using the terminal block as a CSA certified product.

Specify the number of poles in place of □. 2-pole: 2, 3-pole: 3, 4-pole: 4.

Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets

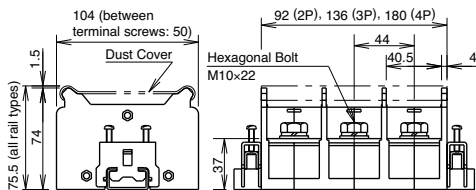
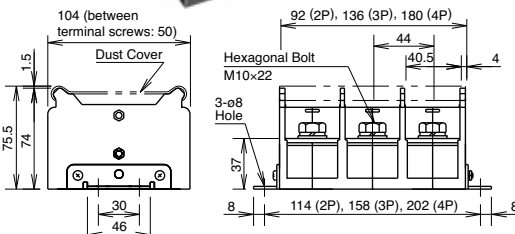
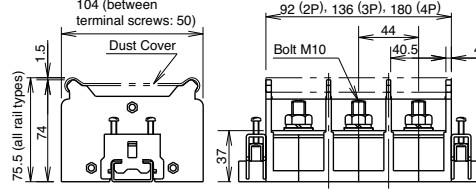
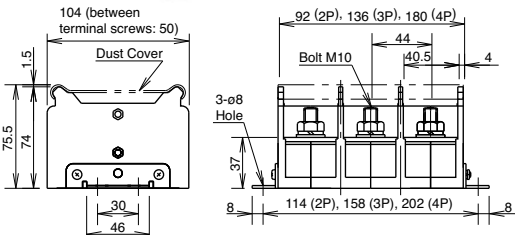

Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces

Sensors

Control
StationsExplosion
Protection

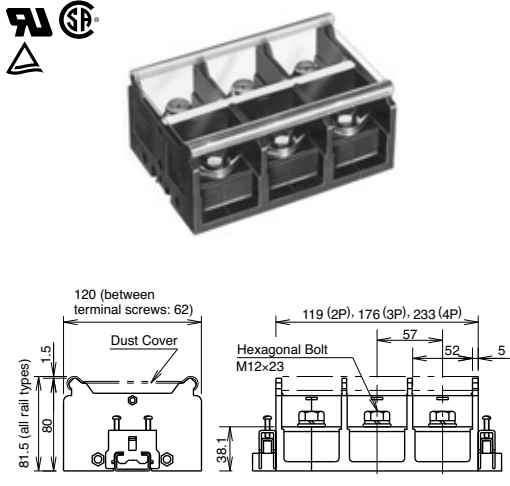
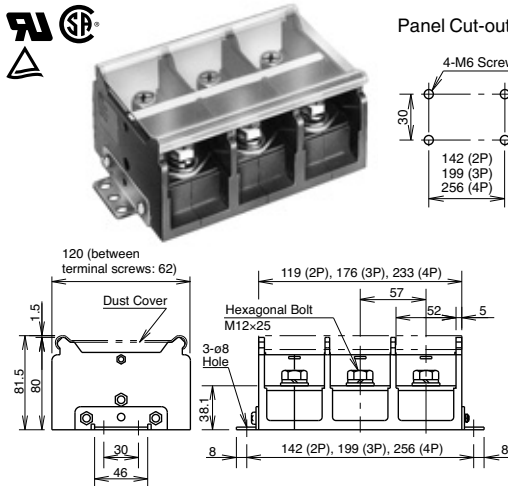
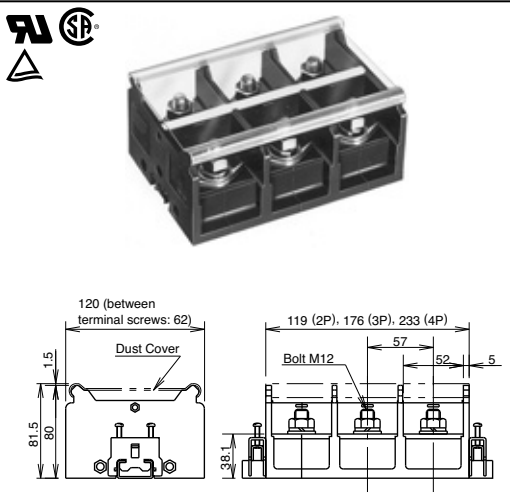
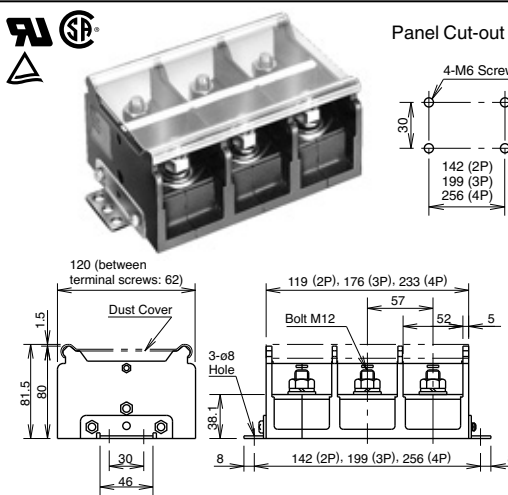

References

BN-W / BNH-W Series Terminal Blocks

Large Capacity	Screw Terminal	Part no.	BN300BW□ 310A M10			BN300BW□K 310A M10 Surface Mount				
		Dimensions	 			 				
		Package Quantity	1			1				
		Weight (Approx.)	2P: 480g, 3P: 750g, 4P: 1020g			2P: 540g, 3P: 810g, 4P: 1080g				
	Stud Terminal	Part no.	BN300NW□ 310A M10			BN300NW□K 310A M10 Surface Mount				
		Dimensions	 			 				
		Package Quantity	1			1				
		Weight (Approx.)	2P: 540g, 3P: 810g, 4P: 1080g			2P: 600g, 3P: 870g, 4P: 1140g				
		Standards						UL/CSA	EN	JIS
		Specification / Ratings	Insulation Voltage						600V	660V
Wire Size						300 MCM	150 mm ² (300 MCM)	150 mm ²		
Rated Current *1						310A	310A	310A		
Terminal Screw *2						M10				
Crimping Terminal						5.5-10 to 150-10				
Max. No. of Crimping Terminals						2				
Socket Wrench						12.7 mm square drive hexagonal socket 17 (*2)				
Tightening Torque						21 to 28 N·m				
Crimping Terminal Dimensions (mm) *3										
Accessories (Supplied)						End Plate, Dust Cover (see page 1076, 1077), Marking Strip (see page 1078) are supplied. (Note) Marking Strip Fastener (BNM3) is not necessary.				
Accessories	DIN Rail						Aluminum: BAA1000, Steel: BAP1000 (see page 1076)			
	C Rail						Aluminum: BNCA1000, Steel: BNCP1000 (see page 1076)			
	DIN+C Rail						Aluminum: BNJA1000 (see page 1076)			
	End Clip						BNL8 (see page 1077)			

- *1: The rated current differs according to operating conditions. See "Selecting Terminal Blocks by Current According to JIS Standards" on page 1057.
 *2: The grooves on the head of the hex bolt are for temporary tightening. For proper tightening, use an applicable socket wrench and tighten within the range of the recommended tightening torque.
 *3: Use a CSA certified crimping terminal when using the terminal block as a CSA certified product.
 Specify the number of poles in place of □. 2-pole: 2, 3-pole: 3, 4-pole: 4.

BN-W / BNH-W Series Terminal Blocks

Large Capacity	Screw Terminal	Part no.	BN400BW□ 370A M12			BN400BW□K 370A M12 Surface Mount		
		Dimensions						
		Package Quantity	1			1		
		Weight (Approx.)	2P: 950g, 3P: 1400g, 4P: 1860g			2P: 1030g, 3P: 1480g, 4P: 1940g		
	Stud Terminal	Part No.	BN400NW□ 370A M12			BN400NW□K 370A M12 Surface Mount		
		Dimensions						
		Package Quantity	1			1		
		Weight (Approx.)	2P: 980g, 3P: 1460g, 4P: 1930g			2P: 1060g, 3P: 1540g, 4P: 1990g		
	Standards		UL/CSA	EN	JIS	UL/CSA	EN	JIS
	Specification / Ratings	Insulation Voltage	600V	660V	600V	600V	660V	600V
Wire Size		400 MCM	200 mm ² (400 MCM)	200 mm ²	400 MCM	200 mm ² (400 MCM)	200 mm ²	
Rated Current *1		350A	370A	370A	350A	370A	370A	
Terminal Screw		M12			M12			
Crimping Terminal		14-12 to 200-12			14-12 to 200-12			
Max. No. of Crimping Terminals		2			2			
Socket Wrench		12.7 mm square drive hexagonal socket 19 (*2)			12.7 mm square drive hexagonal socket 19 (*2)			
Tightening Torque		38 to 49 N·m			38 to 49 N·m			
Crimping Terminal Dimensions (mm) *3								
Accessories (Supplied)		End Plate, Dust Cover (see page 1076, 1077), Marking Strip (see page 1078) are supplied. (Note) Marking Strip Fastener (BNM3) is not necessary.						
Accessories	DIN Rail	Aluminum: BAA1000, Steel: BAP1000 (see page 1076)			—			
	C Rail	Aluminum: BNCA1000, Steel: BNCP1000 (see page 1076)			—			
	DIN+C Rail	Aluminum: BNJA1000 (see page 1076)			—			
	End Clip	BNL8 (see page 1077)			—			

*1: The rated current differs according to operating conditions. See "Selecting Terminal Blocks by Current According to JIS Standards" on page 1057.

*2: The grooves on the head of the hex bolt are for temporary tightening. For proper tightening, use an applicable socket wrench and tighten within the range of the recommended tightening torque.

*3: Use a CSA certified crimping terminal when using the terminal block as a CSA certified product.

Specify the number of poles in place of □. 2-pole: 2, 3-pole: 3, 4-pole: 4.

Flush
SilhouetteSwitches &
Pilot LightsDisplay
LightsLED
Illumination
UnitsDisplay
UnitsSafety
ProductsTerminal
BlocksComm.
Terminals

AS-Interface

Relays &
Timers

Sockets




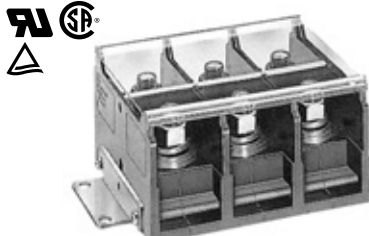







Circuit
ProtectorsPower
SuppliesPLCs &
SmartRelayOperator
Interfaces

Sensors

Control
StationsExplosion
Protection

References

BN-W / BNH-W Series Terminal Blocks

Large Capacity Surface Mount	Screw Terminal	Part No	BN500BW□K		430A	M16	Surface Mount	—			
		Dimensions	 Panel Cut-out   						—		
		Package Quantity	1						—		
		Weight (Approx.)	2P: 1550g, 3P: 2250g, 4P: 2950g						—		
	Stud Terminal	Part No.	BN500NW□K		430A	M16	Surface Mount	BN600NW□K	520A	M16	Surface Mount
		Dimensions	 Panel Cut-out   						 Panel Cut-out   		
		Package Quantity	1						1		
		Weight (Approx.)	2P: 1600g, 3P: 2300g, 4P: 3000g						2P: 1650g, 3P: 2400g, 4P: 3150g		
	Standards	UL/CSA	EN	JIS	UL/CSA	EN	JIS				
	Specification / Ratings	Insulation Voltage	600V	660V	600V	600V	660V	600V			
Wire Size		500 MCM	240 mm ² (500 MCM)	250 mm ²	600 MCM	300 mm ² (600 MCM)	325 mm ²				
Rated Current *1		500A	430A	430A	600A	520A	520A				
Terminal Screw *2		M16			M16						
Crimping Terminal		14-16 to 200-16		325-16	14-16 to 200-16		325-16				
Max. No. of Crimping Terminals		2		1	2		1				
Socket Wrench		12.7 mm square drive hexagonal socket 24 (*2)			12.7 mm square drive hexagonal socket 24 (*2)						
Tightening Torque	83 to 116 N·m			83 to 116 N·m							
Crimping Terminal Dimensions (mm) *3											
Accessories (Supplied)	End Plate, Dust Cover (see page 1076, 1077), Marking Strip (see page 1078) are supplied. (Note) Marking Strip Fastener (BNM3) is not necessary.										

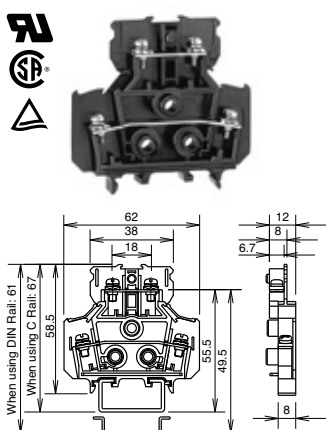
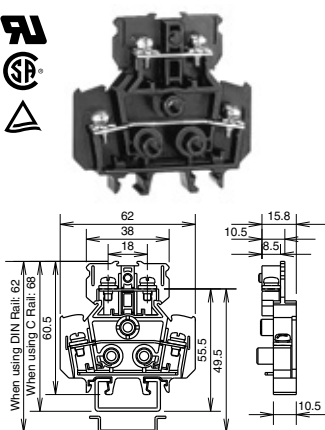
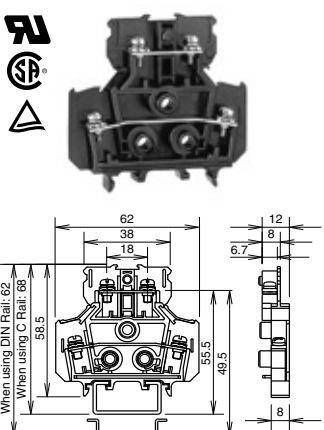
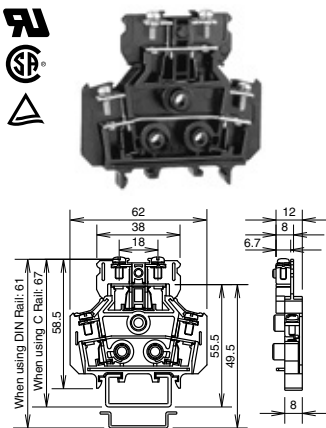
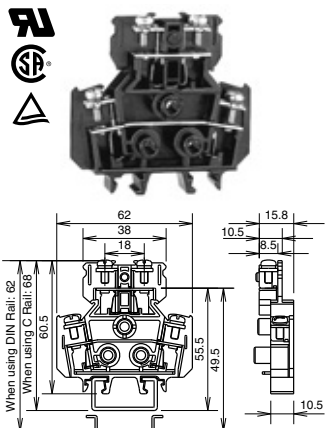
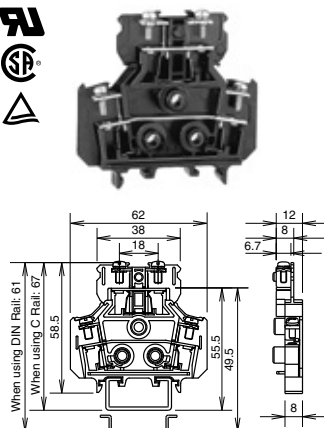



- *1: The rated current differs according to operating conditions. See "Selecting Terminal Blocks by Current According to JIS Standards" on page 1057.
 *2: The grooves on the head of the hex bolt are for temporary tightening. For proper tightening, use an applicable socket wrench and tighten within the range of the recommended tightening torque.
 *3: Use a CSA certified crimping terminal when using the terminal block as a CSA certified product.
 Specify the number of poles in place of □. 2-pole: 2, 3-pole: 3, 4-pole: 4.

BN-W / BNH-W Series Terminal Blocks

Self-Lifting Terminal with Fuse	BNF10S 10A M4	BNF10N (With Lamp) 10A M4	BNT20 20A M4	
	Fuse Ratings - Rated Voltage: 250V - Rated Current: 1, 3, 5A - Cartridge Fuse: JIS C 6575-2 6.35×31.8 mm or 6.40×30.0 mm • Part No.: BNF10S-1A BNF10S-3A BNF10S-5A • Cartridge used: FGB1 by FUJI Terminal Industry Co., Ltd. Notes: UL/CSA approved products shown below are not supplied with fuses. When UL/CSA approval is required for fuse terminal blocks, use UL/CSA-rated fuses. - Part No.: BNF10SW - Rated Insulation Voltage: 600V - Rated Current: 10A - Applicable Wire: 18-10 AWG - UL File No.: E78117 - CSA File No.: LR64803	• Internal Connection Notes: Neon lamp turns on when the fuse blows. For the neon lamp to turn on, the voltages must be from 100 to 250V AC. Fuse Ratings - Rated Voltage: 250V - Rated Current: 1, 3, 5A - Cartridge Fuse: JIS C 6575-2 6.35×31.8mm or 6.40×30.0mm • Part No.: BNF10N-1A BNF10N-3A BNF10N-5A	Notes: - Rated Current: 20A - This terminal block cannot be used as a disconnect switch. - When switching on/off, make sure that voltage is not applied. ON OFF Terminal Screw Terminal Screw	
Ordering No.	BNF10S-□APN20	BNF10N-□APN20	Ordering No.	BNT20PN20
Package Quantity	20	20	Package Quantity	20
Weight (Approx.)	34g	34g	Weight (Approx.)	36g

Standards		JIS	JIS
Specification / Ratings	Insulation Voltage	600V	600V
	Wire Size	5.5 mm ²	5.5 mm ²
	Rated Current	10A max.	20A
	Terminal Screw	M4	M4
	Crimping Terminal	1.25-4 to 5.5-4	1.25-4 to 5.5-4
	Max. No. of Crimping Terminals	2	2
	Tightening Torque	1.4 to 2.0 N·m	1.4 to 2.0 N·m
Crimping Terminal Dimensions (mm)			
Accessories	End Plate	BNE20 (see page 1076)	
	Dust Cover	—	BNC520 (see page 1077)
	Marking Strip	—	PVC 1m/BNM7, Fiber glass 1m/BNM9 PVC 25m/BNM725 (see page 1078)
	DIN Rail/End Clip	Aluminum: BAA1000, Steel: BAP1000 (see page 1076) /BNL6 (see page 1077)	
	C Rail/End Clip	Aluminum: BNCA1000, Steel: BNCP1000 (see page 1076) /BNL6 (see page 1077)	
	DIN+C Rail/End Clip	Aluminum: BNJA1000 (see page 1076) /BNL6 (see page 1077)	

BN-W / BNH-W Series Terminal Blocks




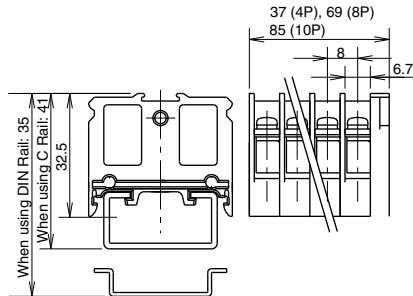
Double-Deck Terminal Block	Self-Lifting Terminal	Part No.	BND15W	16A	M3	BND15LW	21A	M3.5	BND15WT	21A	M3.5
		Dimensions									
		Ordering No.	BND15WPN25			BND15LWPN25			BND15WTPN25		
		Package Quantity	25			25			25		
		Weight (Approx.)	16g			23g			17g		
	Touch-Down Terminal	Part No.	BNDH15W	16A	M3	BNDH15LW	21A	M3.5	BNDH15WT	21A	M3.5
		Dimensions									
		Ordering No.	BNDH15WPN25			BNDH15LWPN25			BNDH15WTPN25		
		Package Quantity	25			25			25		
		Weight (Approx.)	17g			26g			17g		
Standards		UL/CSA	EN	JIS	UL/CSA	EN	JIS	UL/CSA	EN	JIS	
Specification / Ratings	Insulation Voltage	600V	660V	600V	600V	660V	600V	600V	660V	600V	
	Wire Size	22-14 AWG	2 mm ² (22-14 AWG)	1.25 mm ² (2 mm ² max)	22-14 AWG	2 mm ² (22-14 AWG)	2 mm ²	22-14 AWG	2mm ² (22-14 AWG)	2 mm ²	
	Rated Current *1	10A	22A	16A	15A	22A	21A	15A	22A	21A	
	Terminal Screw *2	M3			M3.5			M3			
	Crimping Terminal	1.25-3 (2-3)			2-3.5			1.25-3.5 to 2-3.5			
	Max. No. of Crimping Terminals	2			2			2			
Tightening Torque		0.6 to 1 N·m			1 to 1.3 N·m			1.0 to 1.3 N·m			
Crimping Terminal (mm) *3											
Accessories	End Plate	BNDE15W/BNDE15W2 (see page 1076)			BNDE15LW/BNDE15LW2 (see page 1076)			BNDE15W/BNDE15W2 (see page 1076)			
	Dust Cover	Upper Deck: BNC230, Lower Deck: BNC240 (see page 1077)									
	Marking Strip	PVC 1m/BNM7, Fiber glass 1m/BNM9, PVC 25m/BNM725 (see page 1078)									
	Marking Strip Fastener	BNM3 (see page 1078)									
	Surface Mounting Clip	BNDL2 (see page 1080)									
	Connecting Rod/ Connecting Nut	Connecting Rod: BNR1, BNR2, Connecting Nut: BNN1 (see page 1080)									
	DIN Rail/End Clip	Aluminum: BAA1000, Steel: BAP1000 (see page 1076)/BNL6 (see page 1077)									
	C Rail/End Clip	Aluminum: BNCA1000, Steel: BNCP1000 (see page 1076)/BNL7 (see page 1077)									
DIN+C Rail/End Clip		Aluminum: BNJA1000 (see page 1076)/BNL6, BNL7 (see page 1077)									


*1: The rated current differs according to operating conditions. See "Selecting Terminal Blocks by Current According to JIS Standards" on page 1057.

*2: The grooves on the head of the hex bolt are for temporary tightening. For proper tightening, use an applicable socket wrench and tighten within the range of the recommended tightening torque.

*3: Use a CSA certified crimping terminal when using the terminal block as a CSA certified product.

BN-W / BNH-W Series Terminal Blocks

Common Terminal Self-Lifting Terminal	Part No.	BN15MC4 16A (common current) M3		BN15MC8 16A (common current) M3		BN15MC10 16A (common current) M3	
	No. of Poles	4		8		10	
	Shape	 		 		 	
	Dimensions						
	Ordering No.	BN15MC4PN10		BN15MC8PN10		BN15MC10PN10	
	Package Quantity	10		10		10	
	Weight (Approx.)	30g		57g		70g	
	Color	Light Gray		Light Gray		Light Gray	

Standards		JIS
Specification / Ratings	Insulation Voltage	600V
	Wire Size	1.25 mm ² (2 mm ² max.)
	Rated Current	16A/Common Current
	Terminal Screw	M3
	Crimping Terminal	1.25-3 (2-3)
	Max. No. of Crimping Terminals	2
	Tightening Torque	0.6-1.0 N·m
Crimping Terminal Dimensions (mm)		
Accessories	End Plate	Supplied
	Dust Cover	BNC230 (see page 1077)
	Marking Strip	PVC 1m/BNM7, Fiber glass 1m/BNM9, PVC 25m/BNM725 (see page 1078)
	Marking Strip Fastener	BNM3 (see page 1078)
	DIN Rail / End Clip	Aluminum: BAA1000, Steel: BAP1000 (see page 1076)/BNL6 (see page 1077)
	C Rail / End Clip	Aluminum: BNCA1000, Steel: BNCP1000 (see page 1076)/BNL7 (see page 1077)
	DIN+C Rail / End Clip	Aluminum: BNJA1000 (see page 1076)/BNL6, BNL7 (see page 1077)

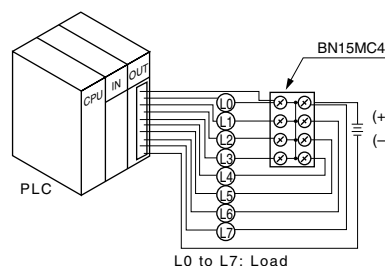
Note1: The rated applicable wire size is 1.25 mm², but 2 mm² wires can also be connected.
The wire size in () does not comply with JIS standards.

Note2: Do not remove the built-in common jumper. Common terminal type terminal blocks cannot be disassembled.

Note3: Make sure that all terminal screws are tightened to an appropriate tightening torque before power is applied.

Note4: Specifications are in compliance with JIS C 2811 except values in ().

Application Example



Features


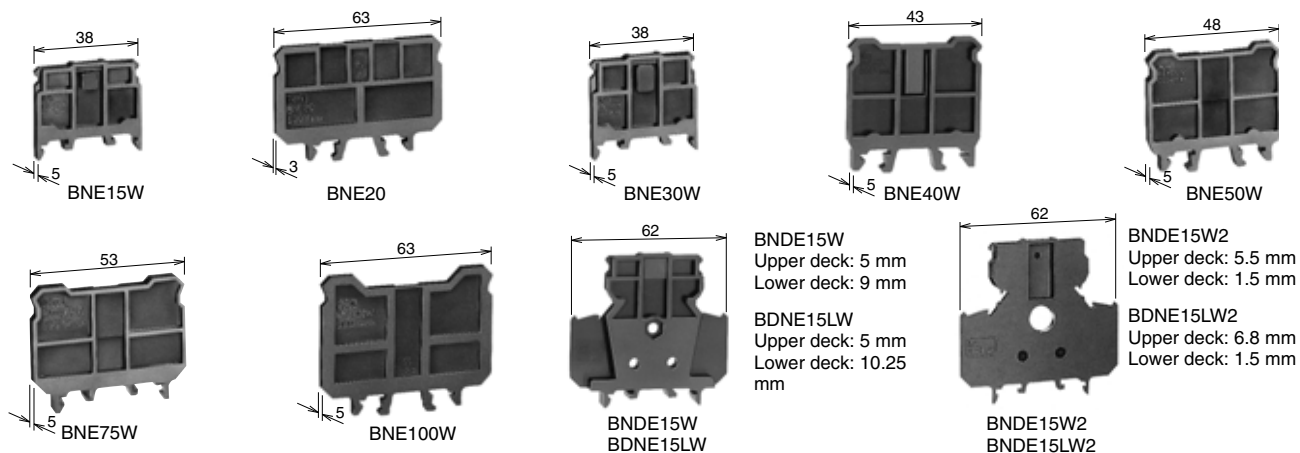
- All terminals are short-circuited by a built-in common jumper. External jumpers are not required.
- Accessories (marking strip, cover, and rails) are compatible with standard types.
- Common terminal type terminal blocks can be combined with other standard types as they are identical in shape and in size as BN15MW.
- Color: Light Gray

BN-W / BNH-W Series Terminal Blocks


Accessories (End Plate / Rail)

End Plates

Used for ends of terminal blocks. Also used to hold the marking strips in place.



Securing a marking strip with the end plate

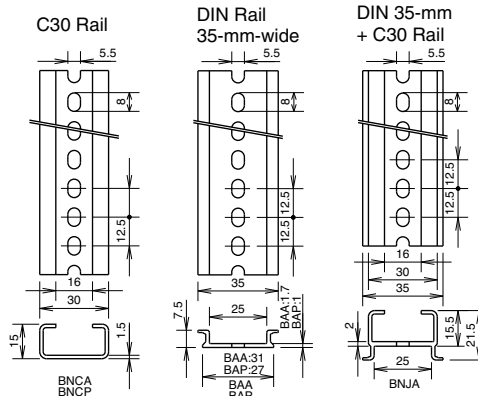
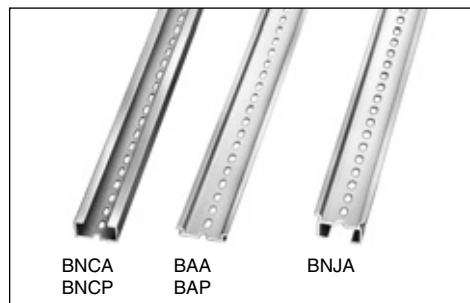


	Part No.	Ordering No.	Applicable Terminal Blocks	Thickness (mm)	Weight (Approx.)	Package Quantity
End Plate	BNE15W	BNE15WPN10	BN10W, BNH10W BN15MW, BNH15MW BN15LW, BNH15LW BN15MWT, BNH15MWT BN15LWT, BNH15LWT	5.0	4g	10
	BNE20	BNE20PN10	BNT20, BNF10S, BNF10N	3.0	8g	
	BNE30W	BNE30WPN10	BN30W, BNH30W	5.0	4g	
	BNE40W	BNE40WPN10	BN40W, BNH40W	5.0	5g	
	BNE50W	BNE50WPN10	BN50W, BNH50W	5.0	6g	
	BNE75W	BNE75WPN10	BN75W	5.0	6g	
	BNE100W	BNE100WPN10	BN100W	5.0	9g	
	BNE150W	BNE150WPN10	BN150W, BN150NW	5.0	10g	
	BNDE15W	BNDE15WPN10	BND15W, BND15WT, BNDH15W, BNDH15WT	Upper deck: 5.0 Lower deck: 9.0	5.5g	
	BNDE15LW	BNDE15LWPN10	BND15LW, BNDH15LW	Upper deck: 5.0 Lower deck: 10.25	6g	
End Plate for Securing End Plate	BNDE15W2	BNDE15W2PN10	BND15W, BND15WT, BNDH15W, BNDH15WT	Upper deck: 5.5 Lower deck: 1.5	5.5g	10
	BNDE15LW2	BNDE15LW2PN10	BND15LW, BNDH15LW	Upper deck: 6.8 Lower deck: 1.5	6g	

Note: BNDE15W2 and BNDE15LW2 are end plates used for securing marking strips at the end of double deck terminal blocks.

Rails

Rails for mounting terminal blocks. Available in five styles.



Approvals:
IEC60715
JIS C 2812

Length	Part No.	Ordering No.	Material	Weight (Approx.)	Package Quantity
1000 mm	BNCA1000	BNCA1000PN10	Aluminum	260g	10
	BNCP1000	BNCP1000PN10	Steel	700g	10
	BAA1000	BAA1000PN10	Aluminum	200g	10
	BAP1000	BAP1000PN10	Steel	320g	10
	BNJA1000	BNJA1000PN10	Aluminum	340g	10